


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

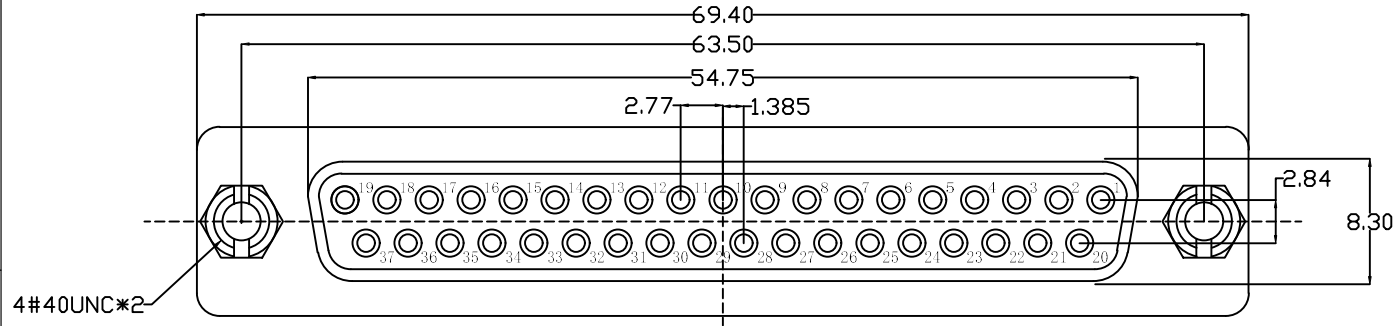

说明:

1. 特性:

额定电压 :250V AC最大值

额定电流 :最大3A

接触阻抗 :30mΩ MAX.

绝缘阻抗 :1000MΩ MIN. at 500V DC

耐电压值 :1000V AC RMS for 1Minute

工作温度 : -45°C~+85°C



2. 材料:

胶 芯 : PBT rated

端 子 : 铜合金

外 壳 : SPCC, 镀镍

螺 丝 : 铁合金, 镀镍

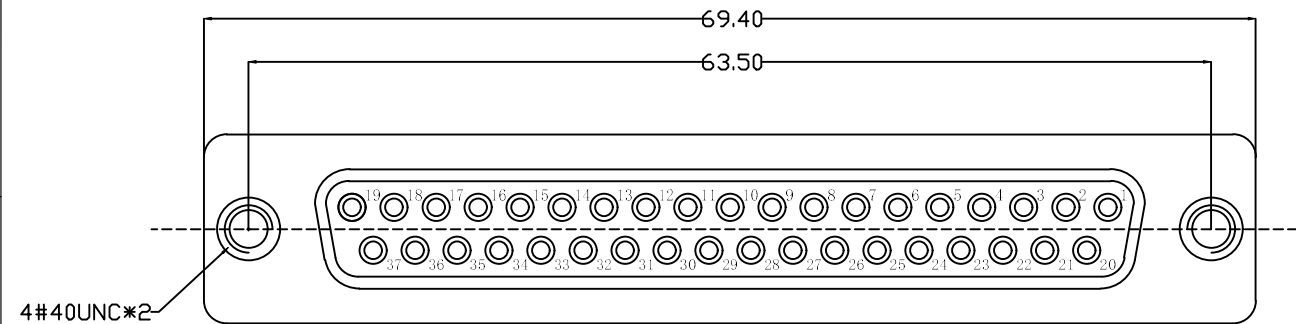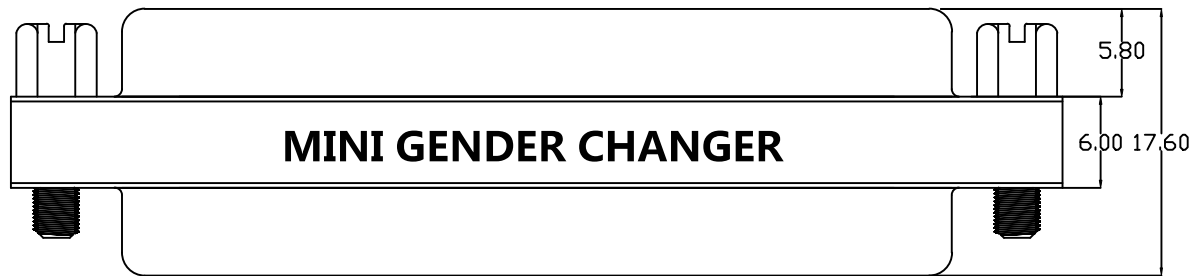

**Bestcreate Technology Limited**

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.50	X'	± 3'
.X	± 0.25	.X'	± 2'
.XX	± 0.15	.XX'	± 1'

Website:www.bsc-elec.com  
Email:bestcreate@bsc-elec.com

DESIGN: I.L. DATE: 2017.3.1

CHECKED: C.W. DATE: 2017.3.1

APPROVED: C.W. DATE: 2017.3.1

TITLE: DB37 FEMALE TO DB37 FEMALE ADAPTER

MATERILA: FINSH: PART NO: DB-37FT037F SIZE: A4

DWG NO: DB-37FT037F

REV: A UNIT mm SCALE 1=1 QUALITY SYMBOLS