RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

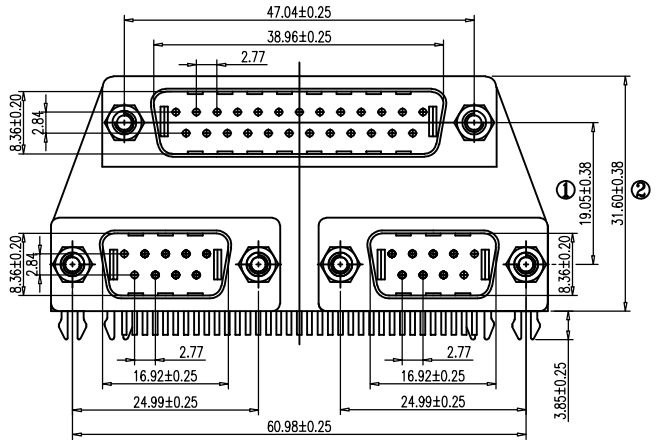

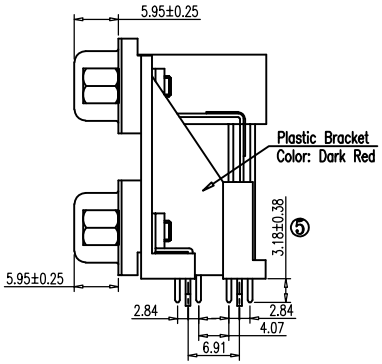

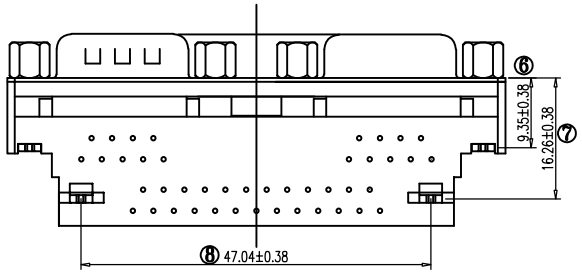

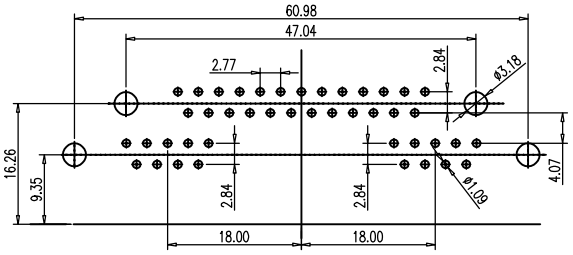

RECOMMENDED PCB LAYOUT THICKNESS=1.6mm
TOLERANCE:±0.05

NOTE:
1.MATERIALS AND FINISHED
INSULATOR :PBT+30% GF UL 94V-0,
SHELL : STEEL, NI FINISHED
CONTACT MATERIAL : BRASS, SELEVITE GOLD FINISHED
RIVET:COPPER ALLOY,NI FINISHED,
WITH #4-40 THREADED ASSEMBLED
HARPOON: BRASS,SN FINISHED
2.ELECTRICAL CHARACTERISTICS
CURRENT RATING : 3.0 AMP DC
VOLTAGE RATING: 250 V DC
CONTACT RESISTANCE :30 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
INSULATION RESISTANCE : 1000 MEGAOHMS MIN.
3.ENVIRONMENTAL
OPERATING TEMPERATURE: -55°C ~ +85°C
STORAGE TEMPERATURE:-55°C ~ +105°C
4.HOW TO ORDER:

DL7052-43XX5X1-XX220

- 7:Male/Male+Male
- 05:DR/DR+DR
- 2: 0.75(19.05)
- 43: 25/(9+9)
- S:Selevite Gold Bright TIN
  M:Selevite Gold Matte TIN
- 1:G/F 5: 5u"
  2:2u" 6: 10u"
  3:3u" 7: 15u"
- 5. Full Ni(Shell)
- 0: RoHs
- 2: DR 8.08
- 2: Plastic Bracket
- K: 5.8*12.8 Screw(iron)
  J: 5.8*12.8 Screw(copper)
  6: 4.8*11.8 Screw(iron)
  5: 4.8*11.8 Screw(copper)
  0: W/O Screw
- C: Attach screw type
  B: Ass'y screw type
  A: No screw type
- 1: PBT+PBT
- 1: All Black

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:					
.X	±	0.35	X°	±	3°
.XX	±	0.25	.X°	±	2°
.XXX	±	0.15	.XX°	±	1°

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN:	DATE:
I. L	2017. 3. 1
CHECKED:	DATE:
C. W	2017. 3. 1
APPROVED:	DATE:
C. W	2017. 3. 1

TITLE: DR25M-DRM+DRM(8.08), WITH FORK & SCREW

MATERILA:	PART NO: DL7052-43XX5X1-XX220	SIZE: A4
FINSH:	DWG NO: DL7052-43XX5X1-XX220	

REV:	UNIT	SCALE	QUALITY SYMBOLS
A	mm	1=1	