


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

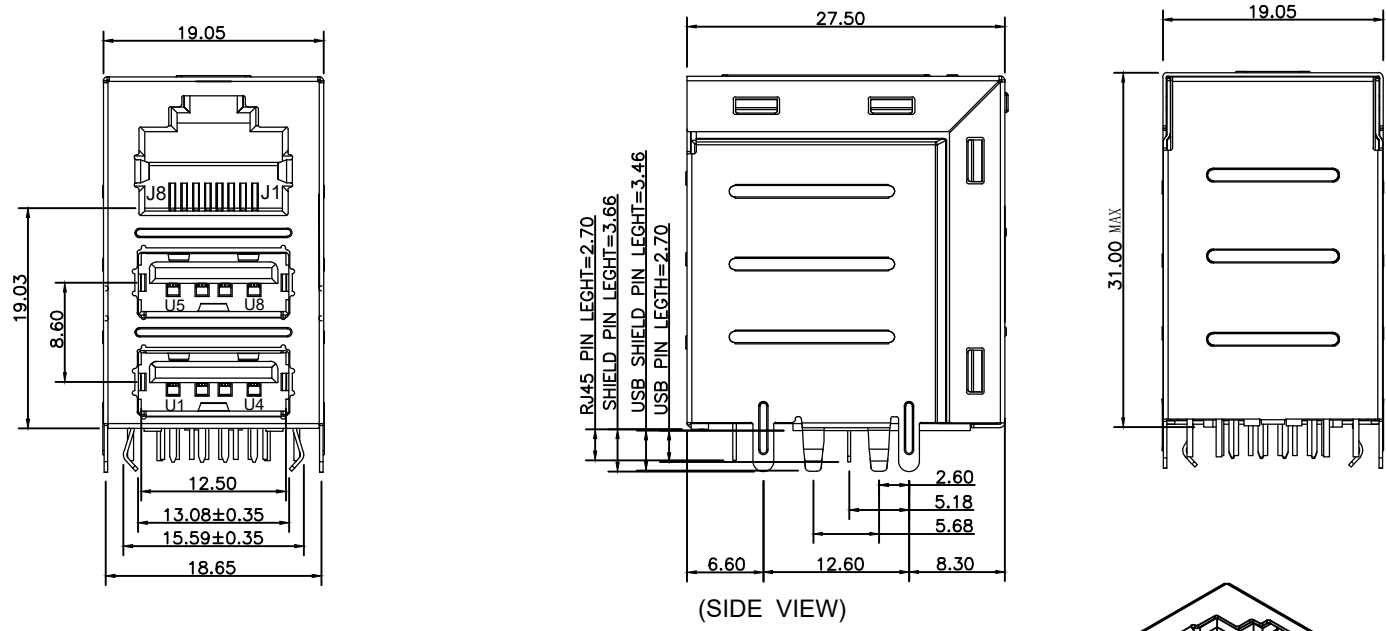

**NOTE:**

- MATERIAL:**  
Housing: High temp. Thermo plastics, UL94V-0.  
Contact: Copper Alloy.  
Shell: Steel or Spcc.
- Electrical performance:**  
Voltage Current Rating: 1.5 AMP. 30V AC  
Insulation Resistance: 100M Ω Min.  
Contact Resistance: 40 m Ω Max.  
Dielectric Withstanding Voltage: 500V AC
- Temperature Range:** -45°C to +85°C
- FINISH:**  
Contact: Tin Plating 100u" on solder tail area,  
RJ45 Gold plating Flash on contact area.  
USB Gold plating Flash on contact area,  
30u" min Ni underplating over all.

**PART NO. INFORMATION**

**RJ01- X 5 2 X - 064**

**CONTACT PLATED**  
1: G/F      2: AU 3U"  
3: AU 6U"  
**PACKAGE**  
R: TAPE REEL  
T: TRAY

**HOUSING:**  
1: LCP BLACK  
2: PBT BLACK  
3: PA46 BLACK  
4: PA9T BLACK

**Bestcreate Technology Limited**

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DESIGN:	DATE:	TITLE:	
.X ± 0.35	X.* ± 3"	I. L	2017. 3. 1	RJ45+DUAL USB2.0 FEMALE CONNECTOR DIP TYPE	
.XX ± 0.25	.X.* ± 2"	CHECKED:	DATE:	MATERILA:	PART NO:
.XXX ± 0.15	.XX.* ± 1"	C. W	2017. 3. 1	RJ01-X52X-064	SIZE: A4
Website: www.bsc-elec.com		APPROVED:	DATE:	FINSH:	DWG NO:
Email: bestcreate@bsc-elec.com		C. W	2017. 3. 1	RJ01-X52X-064	

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------