


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

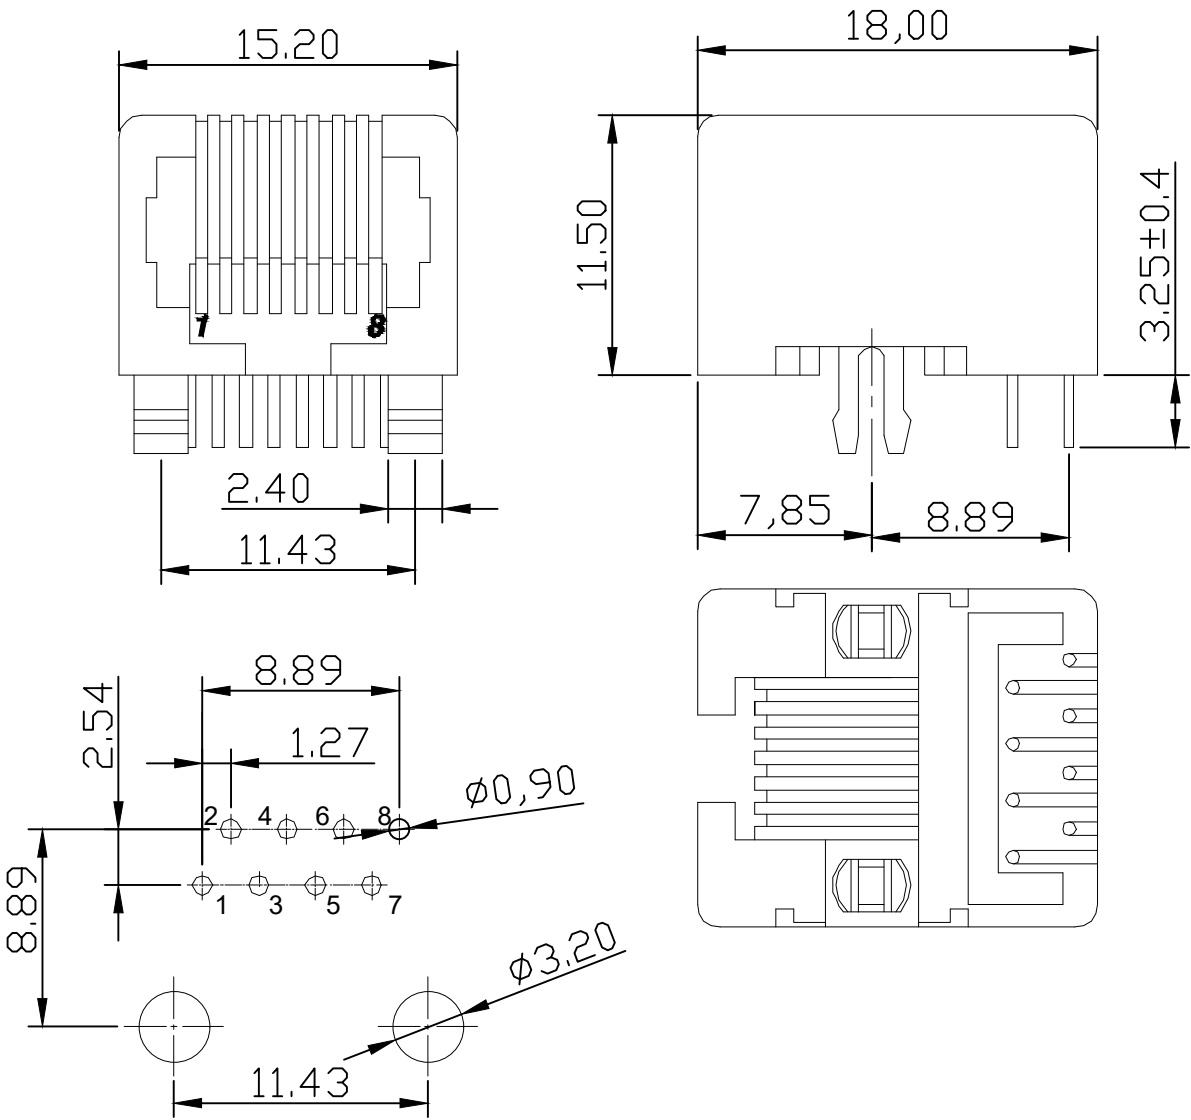

NOTES

- MATERIAL**
- 1. HOUSING MATERIAL : PBT UL94V-0.
 - 2. CONTACT MATERIAL : PHOSPHOR BRONZE ϕ 0.46mm.
 - 3. PLATING : GOLD FLASH PLATING OVER NICKEL.
- ELECTRICAL**
- 1. VOLTAGE RATING : 125 VAC RMS.
 - 2. CURRENT RATING : 1.5 AMP.
 - 3. CONTACT RESISTANCE : 40 MILLIOHMS MAX.
 - 4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 100V DC .
 - 5. DIELECTRIC DIELECTRIC RESISTANCE : 500V DC RMS 50Hz. 1MIN.
- MECHANICAL**
- 1. DURRABILITY : 750 CYCLES MIN.
 - 2. MATING/UNMATING FORC : 2.24 KG. F MAX.
- ENVIRONMENTAL :**
- 1. STORAGE : -40°C ~ +85°C.
 - 2. OPERATION : -40°C ~ +85°C.

PART NO. INFORMATION

RJ01- X 5 X X - 054

- CONTACT PLATED**
- 1: G/F
 - 2: AU 3U"
 - 3: AU 6U"
- PACKAGE**
- R: TAPE REEL
 - T: TRAY
- HOUSING:**
- 1:PBT BLACK
 - 2:PBT GREY

PCBLAYOUT
TOL:±0.05

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:			
.X	± 0.35	X.*	± 3"
.XX	± 0.25	.X*	± 2"
.XXX	± 0.15	.XX*	± 1"

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com

DESIGN:	DATE:
I. L	2017. 3. 1
CHECKED:	DATE:
C. W	2017. 3. 1
APPROVED:	DATE:
C. W	2017. 3. 1

TITLE:		
RJ45 TAB DOWN 8P2C FEMALE CONNECTOR DIP TYPE, L=18. 0		
MATERILA:	PART NO:	SIZE:
	RJ01-X5XX-054	A4
FINSH:	DWG NO:	
	RJ01-X5XX-054	

REV:	UNIT	SCALE	QUALITY SYMBOLS
A	mm	1=1	