
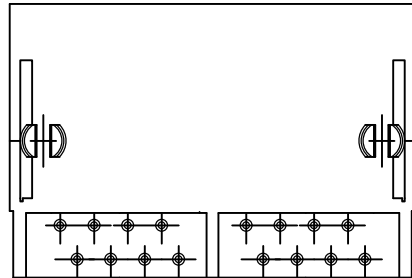
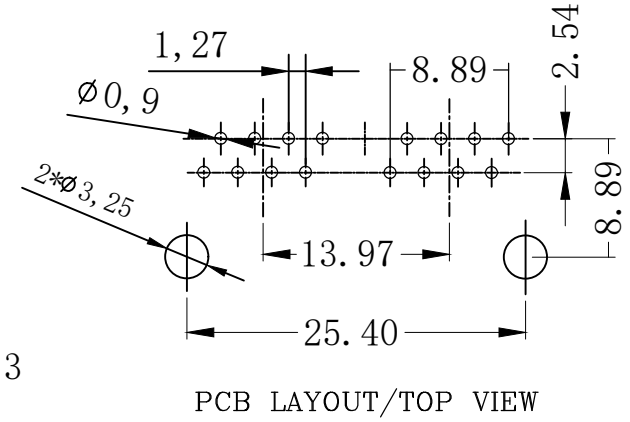
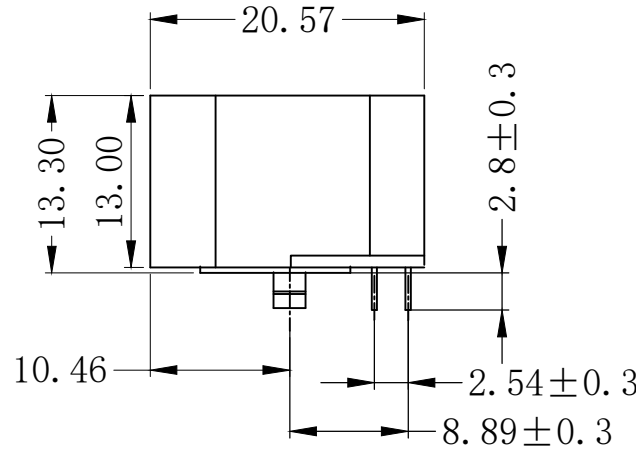


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

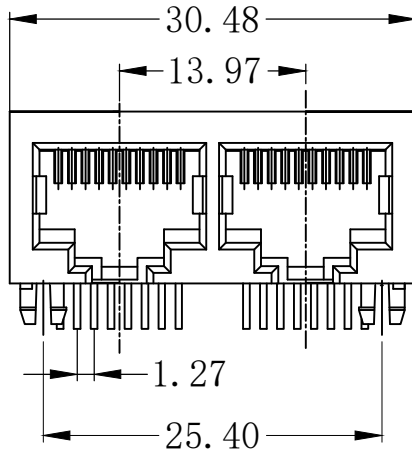

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC RMS.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 40 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 100 VDC.
- 5. DIELECTRIC STRENGTH : 500 VDC RMS 50Hz or 60Hz, 1MIN.

MECHANICAL:

- 1. HOUSING & INSERT MATERIAL : PBT/PA46 UL94V-0.
- 2. CONTACT MATERIAL : Ø0.46 PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
- 3. MATING/UNMATING FORCE : 2.24KG. F MAX.
- 4. OPERATING LIFE : 750 CYCLES MIN.

ENVIRONMENTAL:

- 1. STORAGE : -40°C ~ +85°C
- 2. OPERATION : -40°C ~ +85°C.

PART NO. INFORMATION

RJ01- X 5 X X - 048

CONTACT PLATED
 1: G/F 2: AU 3U"
 3: AU 6U"

PACKAGE
 R: TAPE REEL
 T: TRAY

HOUSING:
 1:PBT BLACK
 2:PBT YELLOW
 3.PA46 BLACK
 4.PA46 YELLOW

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.35	X.*	± 3"
.XX	± 0.25	.X*	± 2"
.XXX	± 0.15	.XX*	± 1"

Website: www.bsc-elec.com
 Email: bestcreate@bsc-elec.com

DESIGN: DATE: 2017. 3. 1

I. L. 2017. 3. 1

CHECKED: DATE: 2017. 3. 1

C. W. 2017. 3. 1

APPROVED: DATE: 2017. 3. 1

C. W. 2017. 3. 1

TITLE: 5921 1X2 RJ45 8P8C CONNECTOR DIP

MATERILA: PART NO: RJ01-X5XX-048 SIZE: A4

FINSH: DWG NO: RJ01-X5XX-048

REV: A UNIT mm SCALE 1=1 QUALITY SYMBOLS