
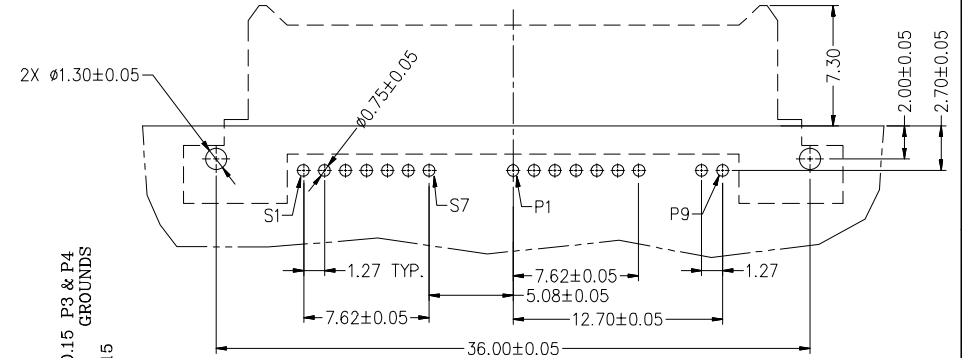


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

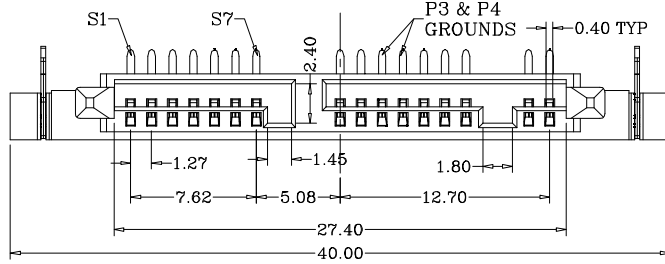

RECOMMENDED PCB LAYOUT
PCB THICKNESS : 1.6mm

NOTES:

1, MATERIAL:




- 1) HOUSING: PA9T+30%GF (EVOH GN2330)UL94V-0 BLACK
- 2) TERMINAL: COPPER ALLOY T=0.25
- 3) HOLD DOWN: COPPER ALLOY T=0.30

2, FINISH

- 1) TERMINAL: Au PLATING (CONTACT POINT) OVER 50u" NICKEL
- 2) SOLDER TAIL: 50u" min MATT TIN OVER 50u" NICKEL
- 3. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C FOR 10 SEC. IN A WAVE SOLDER APPLICATION WITH A 1.6MM PCB

PART NO. INFORMATION

S160 - F X A 5 T -001

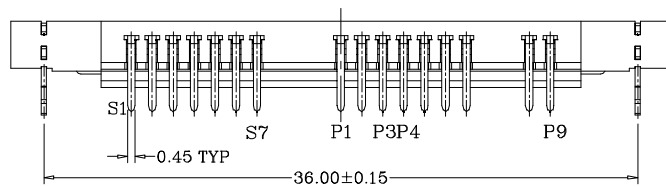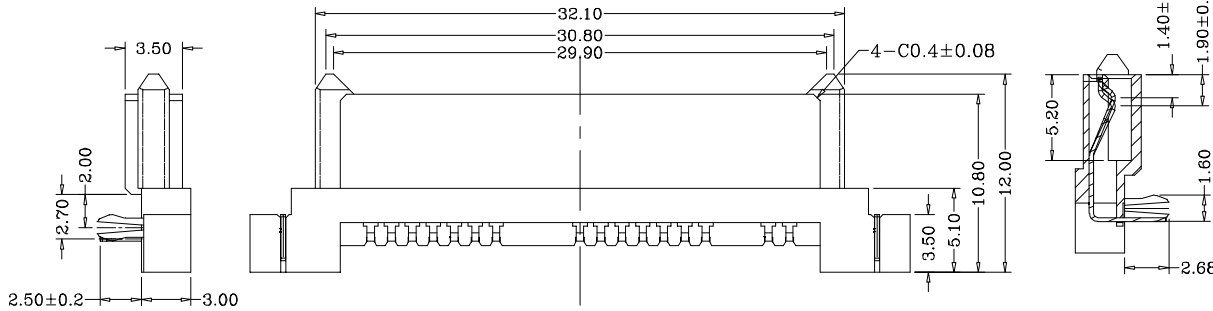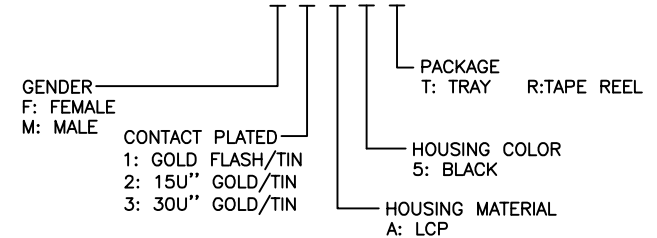

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.35	X.*	± 5*
.X	± 0.25	.X*	± 2*
.XX	± 0.20	.XX*	± 1*

Website: www.bsc-elec.com

E-mail: bestcreate@bsc-elec.com

DESIGN: I. L DATE: 2017. 3. 1

CHECKED: C. W DATE: 2017. 3. 1

APPROVED: C. W DATE: 2017. 3. 1

TITLE: MICRO SATA 16P RECEP R/A,DIP TYPE

MATERILA: FINSH: PART NO: S160-FXA5T-001 SIZE: A4

DWG NO: S160-FXA5T-001 SHEET: 1 OF 2

REV: A UNIT mm SCALE 1=1 QUALITY SYMBOLS