



RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

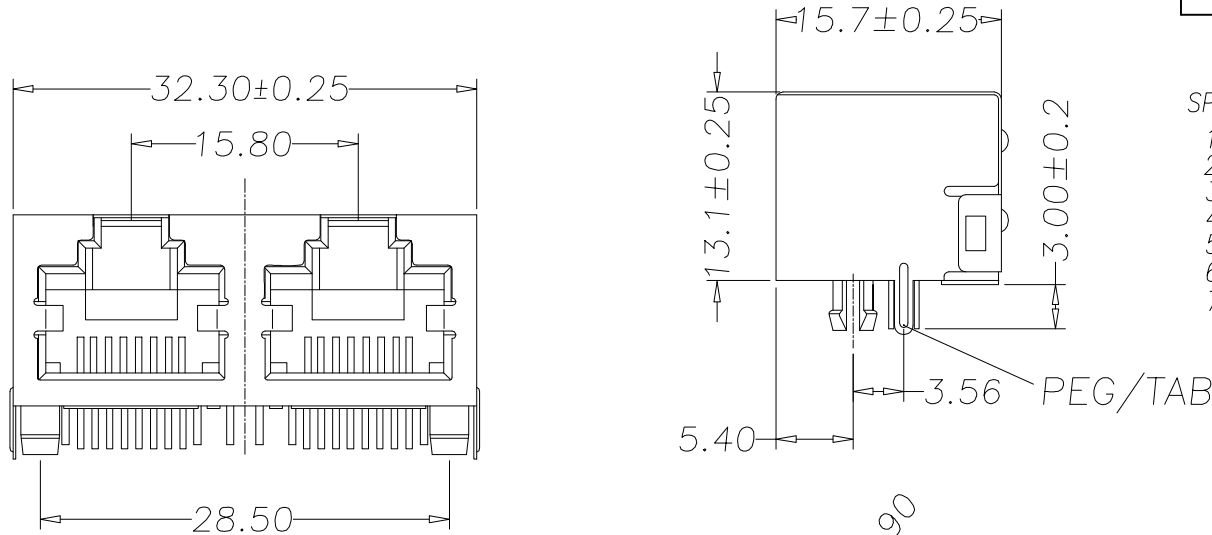

SPECIFICATIONS:

1. Voltage: 150V AC RMS
2. Current Rating: 1.5A
3. Contact Resistance: 30mΩ MAX.
4. Insulation Resistance: 500MΩ MIN.
5. Dielectric Withstang Voltage :1000V AC
6. Operate Temperature: -40°C~80°C
7. Durability: 500 Mating Cycles MIN.

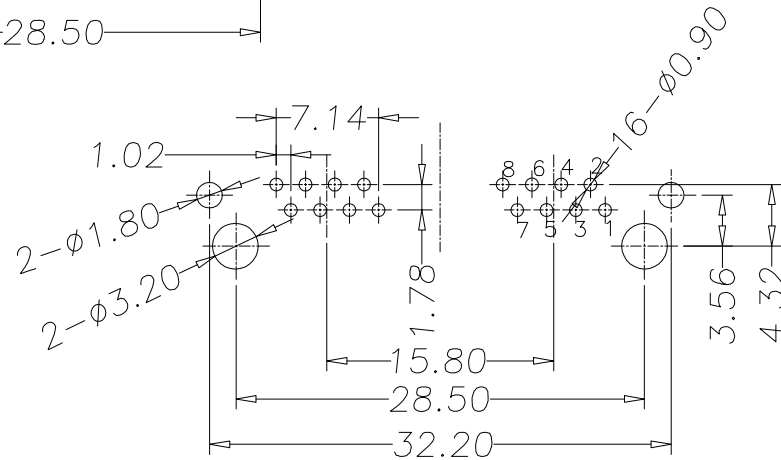

PC Board Layout

PART NO. INFORMATION

RJ01- X 5 0 X - 003

CONTACT PLATED

- 1: G/F 2: AU 3U"
3: AU 5U" 4: AU 10U"
5: AU 15U" 6: AU 30U"

PACKAGE

- R: TAPE REEL
T: TRAY

c	Shielding	1	Brass	Ni Plating
b	Terminal	8	Phosphor Bronze	Terminal Plating
a	Housing	1	PBT UL94V-0	See Color Scheme
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.30	.X'	± 3'
.XX	± 0.20	.X''	± 2'
.XXX	± 0.10	.XXX'	± 1'

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com

DESIGN: DATE:

I. L. CHECKED: DATE:

C. W. APPROVED: DATE:

C. W. 2017.3.1

TITLE: Reverse RJ45 8P8C DIP Type, H=5.33

MATERILA:	PART NO: RJ01-X50X-003	SIZE: A4
FINISH:	DWG NO: RJ01-X50X-003	

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS	
--------	---------	-----------	-----------------	--