



RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

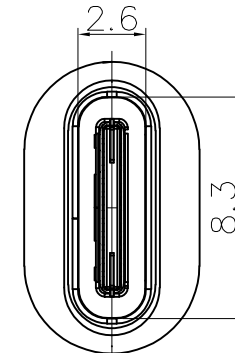

Color
White
Green
Black

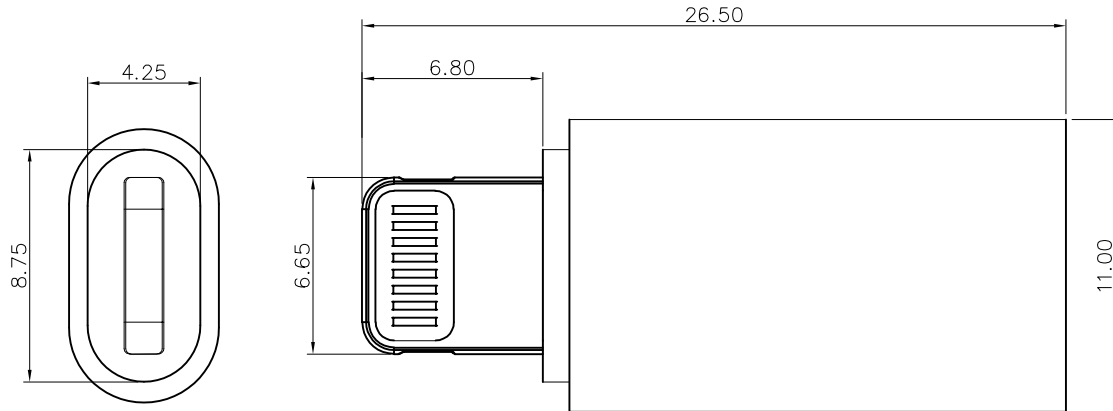

NOTE:

1. ELECTRICAL CHARACTERISTICS;
 - 2.1 CONTACT RESISTANCE: 80mΩ Max
 - 2.2 CONTACT CURRENT RATING: 2.5 A
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100 V R. M. S.
 - 2.4 INSULATION RESISTANCE 100 MEGOHMS Min
 - 2.5 OPERATING TEMPERATURE: -25° C ~ 75° C
2. MECHANICAL CHARACTERISTICS;
 - 2.1 MATING FORCE: USB CF 5~20N & MICRO USB 35N Max.
 - 2.2 UNMATED FORCE: USB CF 8~20N & MICRO USB 10N Min.
3. PLATING
 - 3.1 TERMINAL CONTACT: (SEE TAB) GOLD PLATING ALL OVER 50u"MIN NICKEL
 - 3.2 SHELL: 50u"MIN. NICEL ALL OVER

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.50	X'.	±	5'
.X	±	0.30	.X'	±	2'
.XX	±	0.10	.XX'	±	1'

DESIGN:	DATE:
I.L	2017.3.1
CHECKED:	DATE:
C.W	2017.3.1
APPROVED:	DATE:
C.W	2017.3.1

TITLE:		
AP CM TO TYPE C ADAPTER PD FAST CHARGER 27W		
MATERILA:	PART NO:	SIZE:
	ADAPCMCF-045	A4
FINSH:	DWG NO:	
	ADAPCMCF-043	

REV:	UNIT	SCALE	QUALITY SYMBOLS
A	mm	1=1	

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com