



**RoHS Compliant**

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

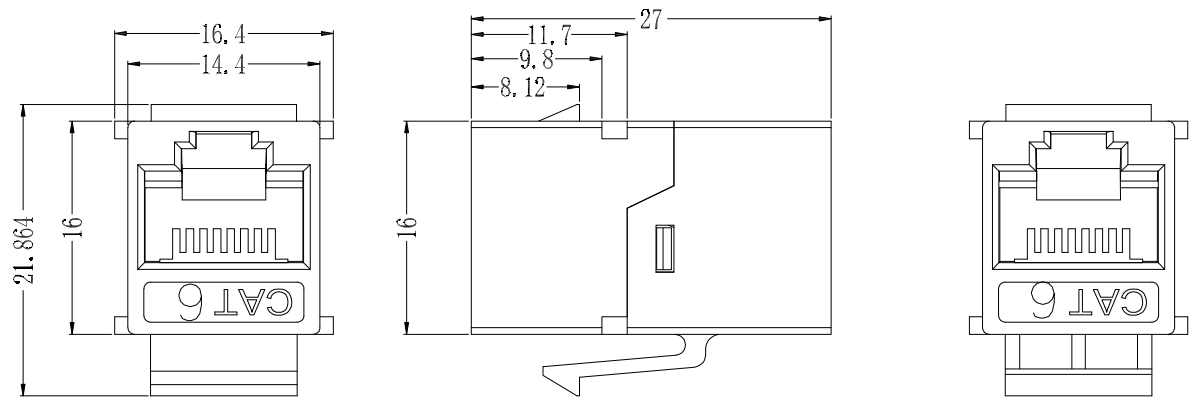

**DESCRIPTION OF PRODUCTS:**

1. APPLY TO THE CONNECTION OF COMMUNICATION SOCKET BETWEEN EQUIPMENT AND WORKING AREA FOR SIGNAL TRANSMISSION. MEET THE TRANSSMISSION STANDARD OF EIA/TIA568A/B MODE FIVE CATEGORIES
2. INTERNAL STRUCTURE IS COMPACT, BRIEF OUTWARD, ELEGANT APPEARANCE.
3. LIFETIME: 750CYCLES
4. CONTACT RESISTANCE  $\leq 2.5\text{M}\Omega$
5. PRESSURE RESISTANCE: DC700V 1MIN
6. INSULATION RESISTANCE  $\geq 1000\Omega$
7. CABLE AND PLUG WILL TAKE OVER 7.5KG TENSION
8. HOUSING: PC BLACK ROHS
9. TERMINAL: CAROBRONZE T=0.35MM
9. FLANGE WITH HOLE: ZINC ALLOY 0.35FU", 3u", 6U", 15U", 30U", 50U"

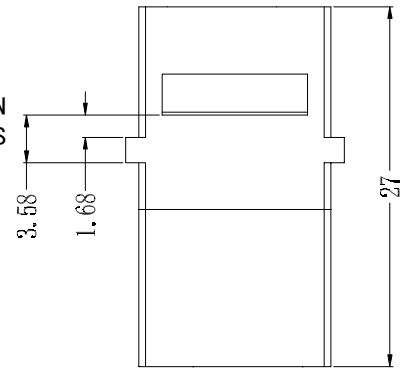

**Bestcreate Technology Limited**

TOLERANCES UNLESS OTHERWISE SPECIFIED:					
X.	±	0.35	X.*	±	3'
.X	±	0.30	.X*	±	2'
.XX	±	0.25	.XX*	±	1'

Website: [www.bsc-elec.com](http://www.bsc-elec.com)  
 Email: [bestcreate@bsc-elec.com](mailto:bestcreate@bsc-elec.com)

DESIGN:	DATE:
I. L	2017. 3. 1
CHECKED:	DATE:
C. W	2017. 3. 1
APPROVED:	DATE:
C. W	2017. 3. 1

TITLE:		
RJ45 8P8C CAT. 6 UTP ADAPTER, L=27MM		
MATERILA:	PART NO:	SIZE:
	UTP-S-5966-CAT-6-27MM	A4
FINSH:	DWG NO:	
	UTP-S-5966-CAT-6-27MM	

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------