

RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

NOTES:

1.MATERIAL:

- 1-1. INSERTMOLDING: LCP, COLOR:BACK,UL94-V0.
- 1-2. CONTACT: C2680(T=0.20mm) ;
GOLD FLASH ON CONTACT AREA,
100u" Min. Tin PLATED ON SOLDER TAILS.
50u" Min. NICKEL PLATED OVERALL.
- 1-3. SHELL: SPCC,(T=0.50mm) ;GOLD FLASH PLATED OVERALL.
100u" Min. NICKEL BOTTOM PLATED OVERALL.
120u" Min. COPPER BOTTOM PLATED OVERALL.

2.ELECTRICAL CHARACTERISTICS:

- 2-1. CURRENT RATING: 0.5A
- 2-2. CONTACT RESISTANCE: 30mΩ MAX.
- 2-3. INSULATION RESISTANCE: 100MΩ MIN.
- 2-4. DIELECTRIC WITHSTAND VOLTAGE: AC 500V/MINUTE.
- 2-5. OPERATING TEMPERATURE RANGE: -25°C~+85°C


3.MECHANICAL CHARACTERISTICS:

- 3-1. INSERTION FORCE: 4.5Kgf MAX.
 - 3-2. EXTRACTION FORCE: 1.0Kgf MIN.,4.0Kgf MAX.
- 4.DURABILITY: 10000 CYCLES.

5.SALT FOG TEST:24H.

6."⊗" SHOWS FAI MEASURMENT POINT.

7. MARKED"▽"AS KEY CONTROL SIZE.

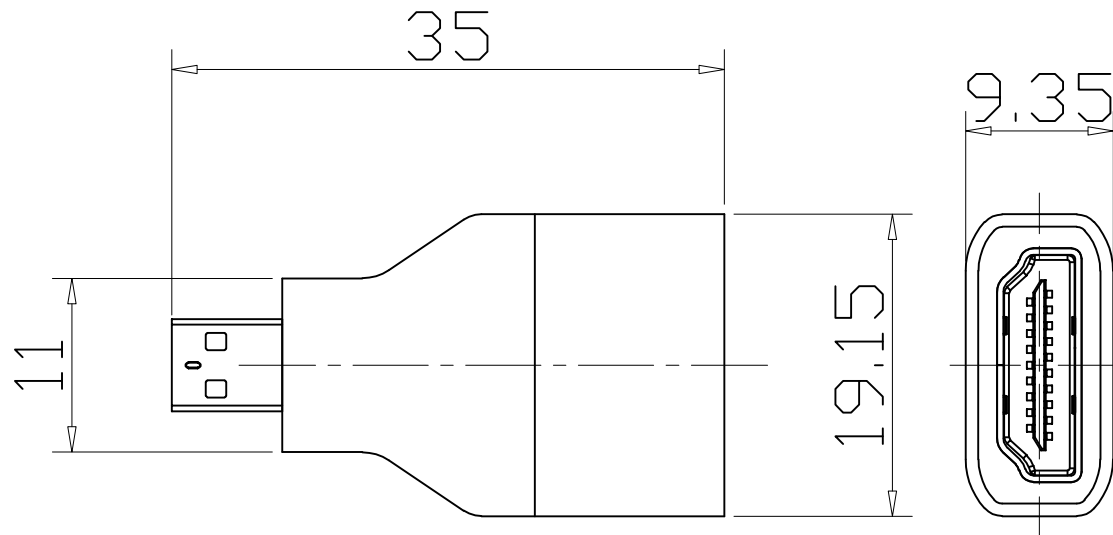

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.50	X.*	±	5°
.X	±	0.40	.X*	±	2°
.XX	±	0.30	.XX*	±	1°

Website:www.bsc-elec.com

Email:bestcreate@bsc-elec.com

DESIGN: DATE:

I.L. 2017.3.1

CHECKED: DATE:

C.W. 2017.3.1

APPROVED: DATE:

C.W. 2017.3.1

TITLE:

HDMI A/F TO D/M ADAPTER 19P

MATERILA:

PART NO:

HDAFDM-008

SIZE:

A4

FINSH:

DWG NO:

HDAFDM-008

REV:

A

UNIT

mm

SCALE

1=1

QUALITY
SYMBOLS

