

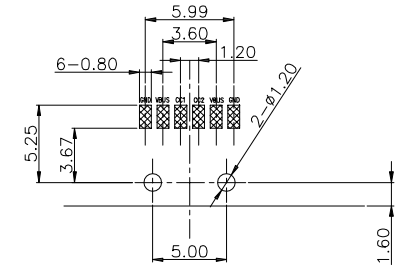








RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

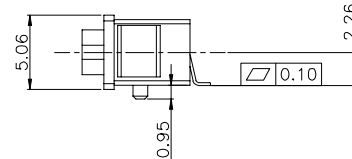

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS T=1.0mm
DEFAULT TOLERANCE+/-0.05

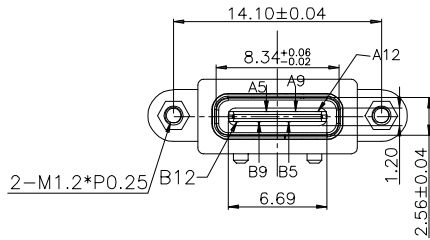

NOTES:


SPECIFICATION:

- CURRENT RATING: 3.0A MAX
- DIELECTRIC WITHSTAND VOLTAGE: 100VAC
- TEMPERATURE RANGE: -30 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
- INSERTION FORCE : 5N~20N
- UNMATING FORCE: 8N~20N
- DURABILITY:5000 CYCLES



PART NO. INFORMATION

U06-C F X X 5 R - 005

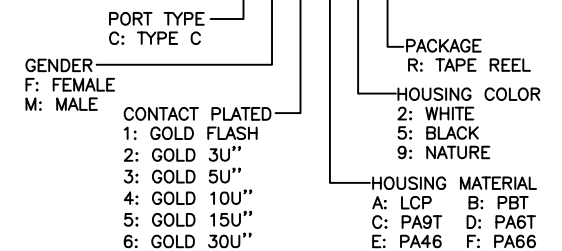

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

ITEM	PART NAME	Q'TY	FINISH
5	Screw	1	C3604 Ni Plating
4	Shell1	1	SUS301 Ni Plating T=0.25mm
3	M-02	1	LCP(G.F30%)
2	Contact	5	Phosphor bronze_CS210R-EH Au/Ni Plating T=0.20mm
1	Housing	1	PA9T (G.F.30%)

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.50	X.*	± 2*
.X	± 0.30	.X*	± 1*
.XX	± 0.10	.XX*	± 0.5*

DESIGN: I. L DATE:

CHECKED: C. W DATE:

APPROVED: C. W DATE:

TITLE:

USB CF 6PIN SMT TYPE

MATERILA:	PART NO:	SIZE:
FINISH:	DWG NO:	A4
	U06-CFXX5R-W005	
	U06-CFXX5R-W005	

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com