


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

NOTE:

1. ELECTRICAL CHARACTERISTICS;
  - 2.1 CONTACT RESISTANCE: 80mΩ Max
  - 2.2 CONTACT CURRENT RATING: 2.1A
  - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100 V R. M. S.
  - 2.4 INSULATION RESISTANCE 100 MEGOHMS Min
  - 2.5 OPERATING TEMPERATURE: -25° C ~ 75° C
2. MECHANICAL CHARACTERISTICS;
  - 2.1 MATING FORCE: USB CM 5~20N & MICRO USB 35N Max.
  - 2.2 UNMATED FORCE: USB CM 8~20N & MICRO USB 10N Min.
3. PLATING
  - 3.1 TERMINAL CONTACT: (SEE TAB) GOLD PLATING  
ALL OVER 50u"MIN NICKEL
  - 3.2 SHELL: 50u"MIN. NICEL ALL OVER

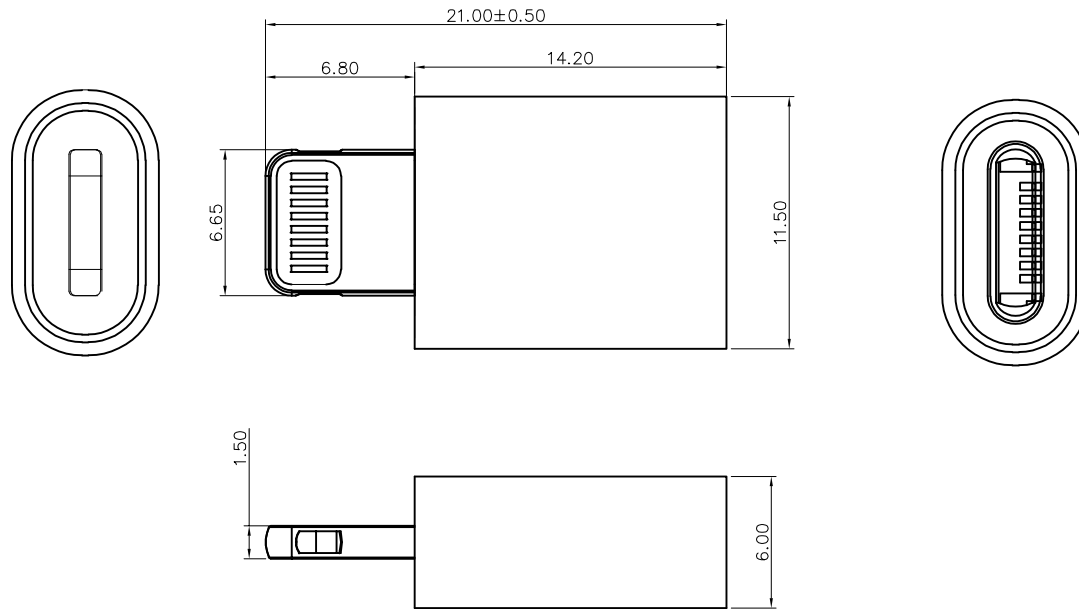

3	Plastic Shell		TYPE CF plastic shell, color: Silver&golden&black	1PCS
2	PVC		PVC 45P, COLOR: WHITE&BLACK	0.005KG
1	PCBA		AP AF TO AP AM DAI IC OHM, NICKEL PLATED	1PCS
Item	Name	Part Number	Description	Q'TY

**Bestcreate Technology Limited**

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.50	X.'	± 5'
.X	± 0.40	.X'	± 2'
.XX	± 0.30	.XX'	± 1'

DESIGN: I.L  
DATE: 2017.3.1  
CHECKED: C.W  
DATE: 2017.3.1  
APPROVED: C.W  
DATE: 2017.3.1

TITLE: AP MALE TO USB AP FEMALE ADAPTER  
MATERILA: PART NO: ADAPMAPF-076 SIZE: A4  
FINSH: DWG NO: ADAPMAPF-076

REV: A  
UNIT: mm  
SCALE: 1=1  
QUALITY SYMBOLS:

Website: www.bsc-elec.com  
Email: bestcreate@bsc-elec.com