

RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

A

B

C





D

A


B

C

D

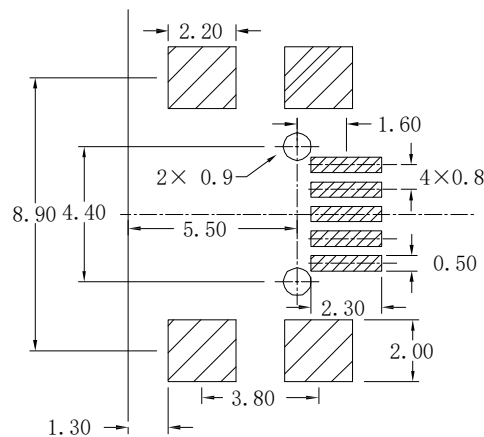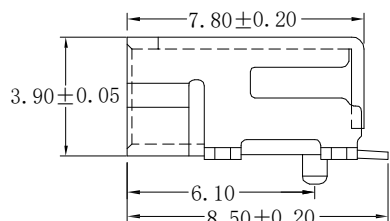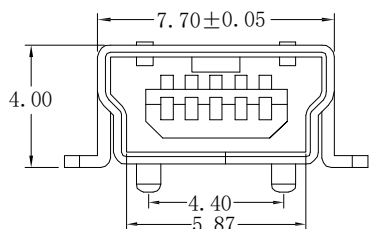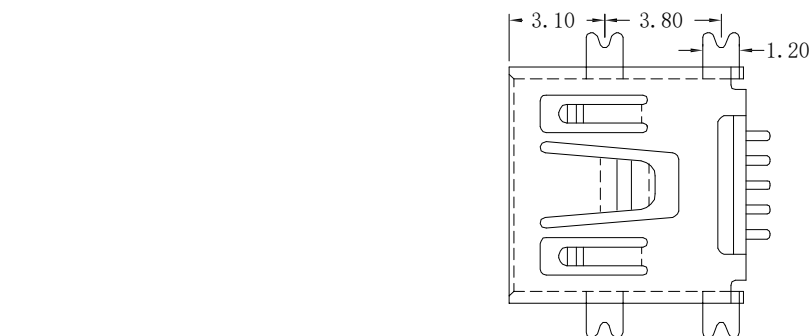

RECOMMENDED PCB LAYOUT

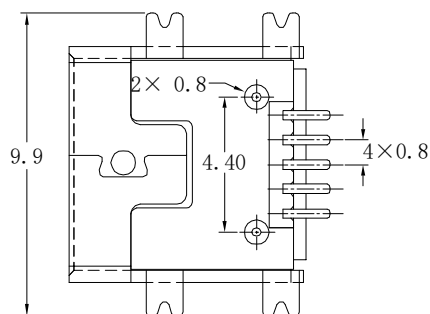

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流 Current Rating
1.0A/contact terminal
2. 额定电压 Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
50 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
300 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
100MEGA ohms MIN


原材料: Raw material:

1. 塑胶: Plastic cement:
Hing Temperature Tnermaplastics,
UL 94V-0 LCP Black
2. 端子: Contact: Copper Alloy C5191/C2680
3. 外壳: Shell: Copper Alloy C2680

电镀: Electroplate:

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Talls
2. 外壳: Shell:
Nickel Plating

PART NO. INFORMATION

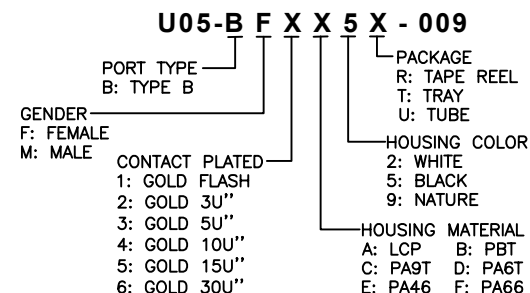

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.50	X'	± 3'
.X	± 0.25	.X'	± 2'
.XX	± 0.15	.XX'	± 1'

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com

DESIGN: DATE: 2017. 3. 1

I. L. DATE: 2017. 3. 1

CHECKED: DATE: 2017. 3. 1

C. W. DATE: 2017. 3. 1

APPROVED: DATE: 2017. 3. 1

TITLE: MINI USB 5P/F SMT 短体

MATERILA:	PART NO: U05-BFXX5X-009	SIZE: A4
FINSH:	DWG NO: U05-BFXX5X-009	

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------