

RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
1.0A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
50 milliohms MAX
4. 耐电压: Dielectnic Withstanding Voitage:
300 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
100MEGA ohms MIN

原材料: Raw material:







1. 塑胶: Plastic cement:
Hing Temperature Thermaplastics,
UL 94V-0 LCP Black
2. 端子: Contact: Copper Alloy C5191/C2680
3. 外壳: Shell: Copper Alloy C2680

电镀: ElectroPlate:


1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Talls
2. 外壳: Shell:
Nickel Plating

PART NO. INFORMATION

U05-B F X X 5 R - 017

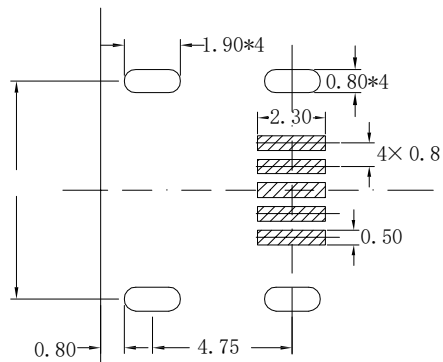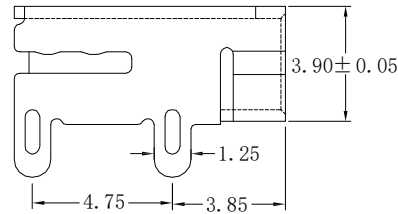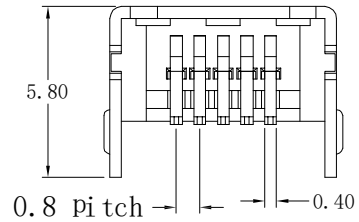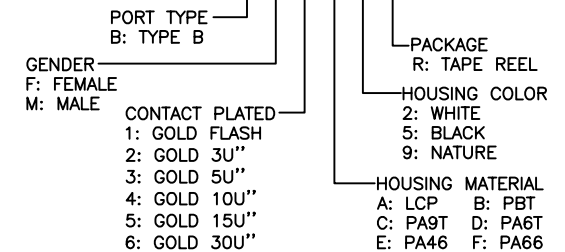

RECOMMENDED PCB LAYOUT



Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.50	X.'	± 3'
.X	± 0.25	.X'	± 2'
.XX	± 0.15	.XX'	± 1'

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com

DESIGN:	I. L	DATE:	2017.3.1
CHECKED:		DATE:	
C. W		DATE:	2017.3.1
APPROVED:		DATE:	
C. W		DATE:	2017.3.1

TITLE:		MINI USB 5P/F	
		90° SMT (B型四脚)	
MATERILA:	PART NO:	U05-BFXX5R-017	SIZE: A4
FINSH:	DWG NO:	U05-BFXX5R-017	

REV:	UNIT	SCALE	QUALITY SYMBOLS
A	mm	1=1	