

RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.0A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
50 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
300 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
100MEGA ohms MIN

原材料:Raw material:



1. 塑胶: Plastic cement:
Hing Temperature Thermoplastics,
UL 94V-0 LCP Black
2. 端子: Contact: Copper Alloy C5191
3. 外壳: Shell: Copper Alloy C2680

电镀: Electroplate:



1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Talls
2. 外壳: Shell:
Nickel Plating

PART NO. INFORMATION

U05-B F X X 5 X - 011			
PORT TYPE B: TYPE B			PACKAGE R: TAPE REEL T: TRAY U: TUBE
GENDER F: FEMALE M: MALE			HOUSING COLOR 2: WHITE 5: BLACK 9: NATURE
	CONTACT PLATED 1: GOLD FLASH 2: GOLD 3U" 3: GOLD 5U" 4: GOLD 10U" 5: GOLD 15U" 6: GOLD 30U"		HOUSING MATERIAL A: LCP B: PBT C: PA9T D: PA6T E: PA46 F: PA66

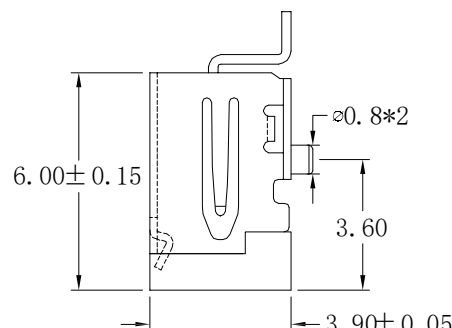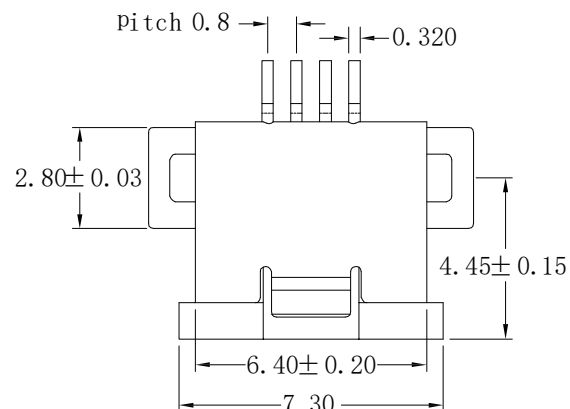

单防

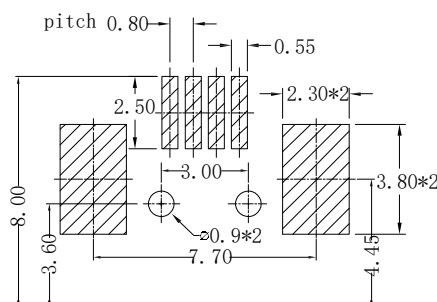

RECOMMENDED PCB LAYOUT

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.50	X.	±	3'
.X	±	0.25	.X	±	2'
.XX	±	0.15	.XX	±	1'

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com

DESIGN:

DATE:

I. L.

2017. 3. 1

CHECKED:

DATE:

C. W.

2017. 3. 1

APPROVED:

DATE:

C. W.

2017. 3. 1

TITLE:

MINI USB 5P BF SMT 单防呆

MATERILA:

PART NO:

U05-BFXX5X-011

SIZE: A4

FINSH:

DWG NO:

U05-BFXX5X-011

REV: A

UNIT mm

SCALE 1=1

QUALITY SYMBOLS

