

RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.0A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
50 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
300 V AC For one minuter
5. 绝缘阻抗: Insulation Resistance:
100MEGA ohms MIN



原材料:Raw material:

1. 塑胶: Plastic cement:
High Temperature Thermoplastics,
LCP Black/Nature
2. 端子: Contact: Copper Alloy C5191/C2680
3. 外壳: Shell: Copper Alloy C2680

电镀: Electroplate:

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Talls
2. 外壳: Shell:
Nickel Plating

PART NO. INFORMATION

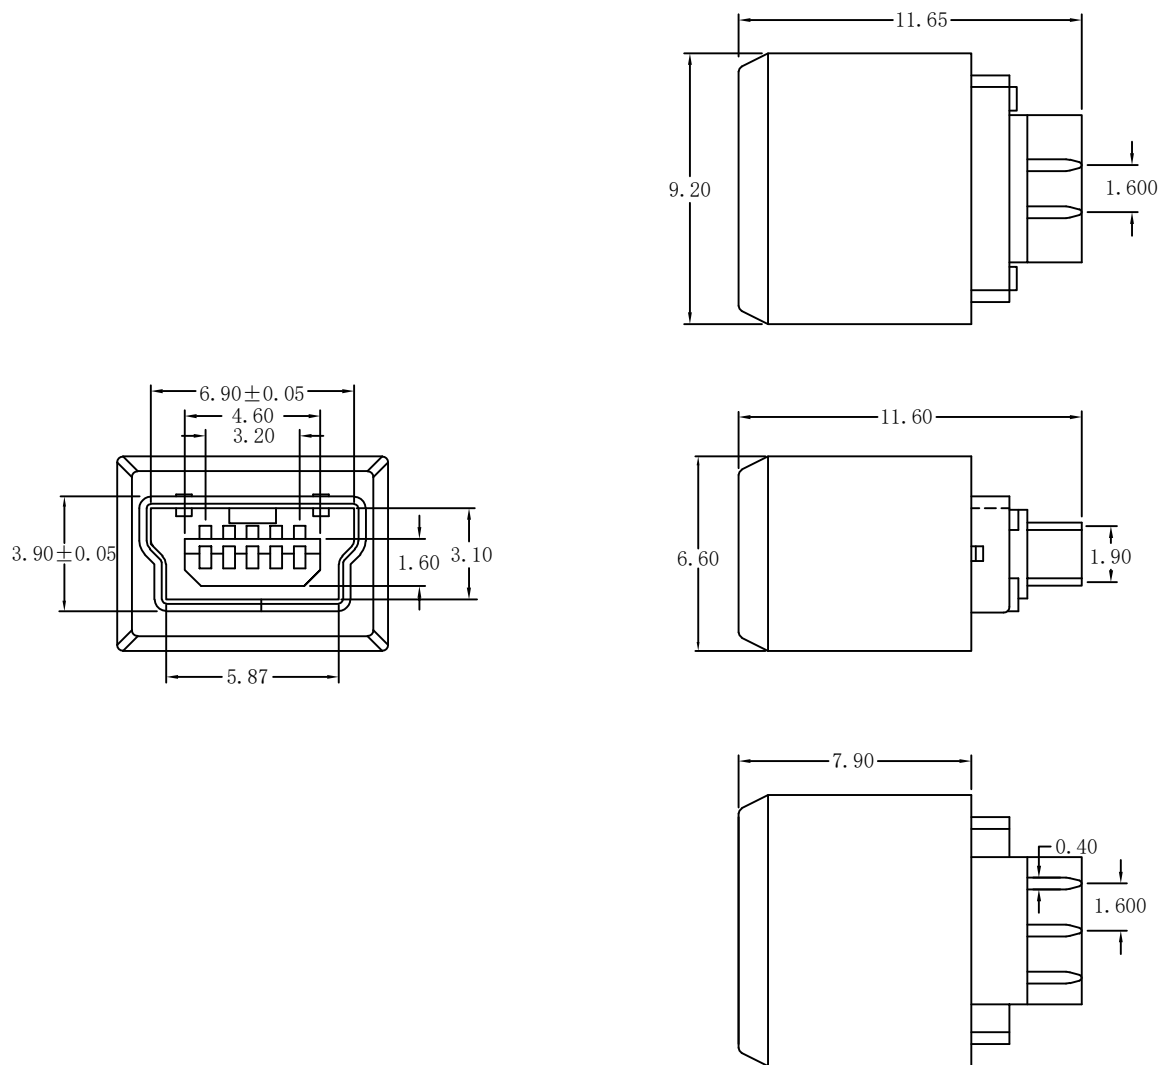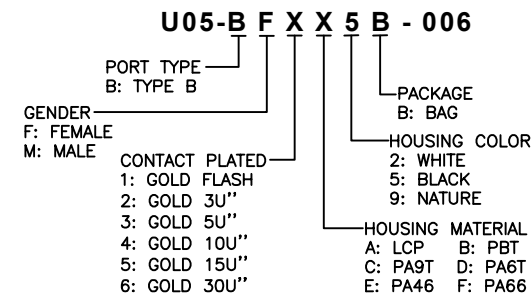

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.50	X.'	±	3'
.X	±	0.25	.X'	±	2'
.XX	±	0.15	.XX'	±	1'

Tel/Whatsapp:0086-13712299763
Skype: belle.wu3340

DESIGN: I.L DATE: 2017.3.1

CHECKED: C.W DATE: 2017.3.1

APPROVED: C.W DATE: 2017.3.1

TITLE: MINI USB 5P/F180° 焊线式B型
(无脚加后塞、护套)

MATERILA:	PART NO: U05-BFXX5B-006	SIZE: A4
FINSH:	DWG NO: U05-BFXX5B-006	

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------