
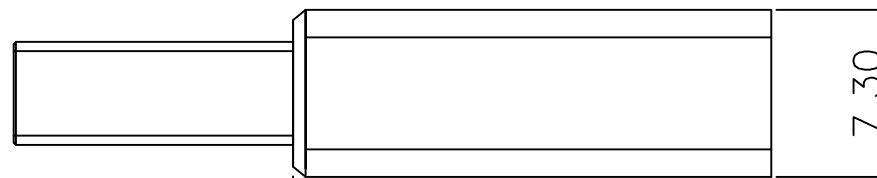
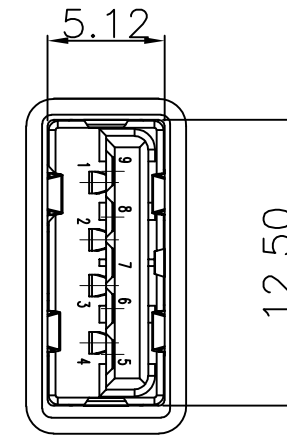
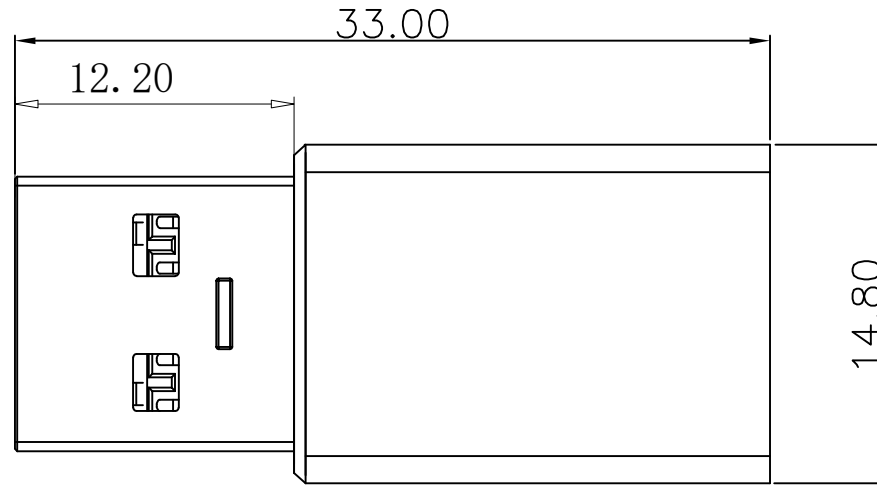


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

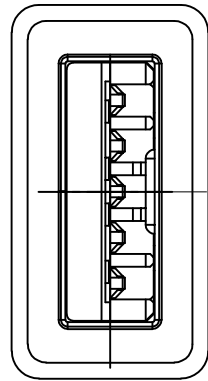

NOTE:

1. ELECTRICAL CHARACTERISTICS;
  - 2.1 CONTACT RESISTANCE: 80mΩ Max
  - 2.2 CONTACT CURRENT RATING: 1.5 A
  - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100 V R. M. S.
  - 2.4 INSULATION RESISTANCE 100 MEGOHMS Min
  - 2.5 OPERATING TEMPERATURE: -25° C ~ 75° C
2. MECHANICAL CHARACTERISTICS:
  - 2.1 MATING FORCE: USB CM 5~20N & USB3.0 AF 35N Max.
  - 2.2 UNMATED FORCE: USB CM 8~20N & USB3.0 AF 10N Min.
3. PLATING
  - 3.1 TERMINAL CONTACT: (SEE TAB) GOLD PLATING  
ALL OVER 50u"MIN NICKEL
  - 3.2 SHELL: 50u"MIN. NICKEL ALL OVER

3	USB AF		USB3.0 AF Plastic cover 28*16.24*8.52mm, white&Black	1PCS
2	TYPE C		PVC 45P, COLOR: WHITE&Black	0.005KG
1	PCBA		USB3.0 AM TO TYPE CF R: 5.1k C: 10nF, nickel plated	1PCS
Item	Name	Part Number	Description	Q'TY

**Bestcreate Technology Limited**

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.50	X.*	± 5'
.X	± 0.30	.X*	± 2'
.XX	± 0.10	.XX*	± 1'

Website: www.bsc-elec.com  
Email: bestcreate@bsc-elec.com

DESIGN:	DATE:	2017.3.1
I.L		
CHECKED:	DATE:	2017.3.1
C.W		
APPROVED:	DATE:	2017.3.1
C.W		

TITLE: USB3.0 AM TO USB3.0 AF ADAPTER METAL CASE, L=33MM		
MATERILA:	PART NO: AD30AM30AF-052	SIZE: A4
FINSH:	DWG NO: AD30AM30AF-052	

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------

