


RoHS Compliant


REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

NOTE:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 80mΩ Max
 - CONTACT CURRENT RATING: 1.5 A
 - DIELECTRIC WITHSTANDING VOLTAGE: 100 V R.M.S.
 - INSULATION RESISTANCE 100 MEGOHMS Min
 - OPERATING TEMPERATURE: -25° C ~ 75° C
- MECHANICAL CHARACTERISTICS:
 - MATING FORCE: USB CM 5~20N & USB3.0 AF 35N Max.
 - UNMATED FORCE: USB CM 8~20N & USB3.0 AF 10N Min.
- PLATING
 - TERMINAL CONTACT: (SEE TAB) GOLD PLATING
ALL OVER 50u"MIN NICKEL
 - SHELL: 50u"MIN. NICKEL ALL OVER

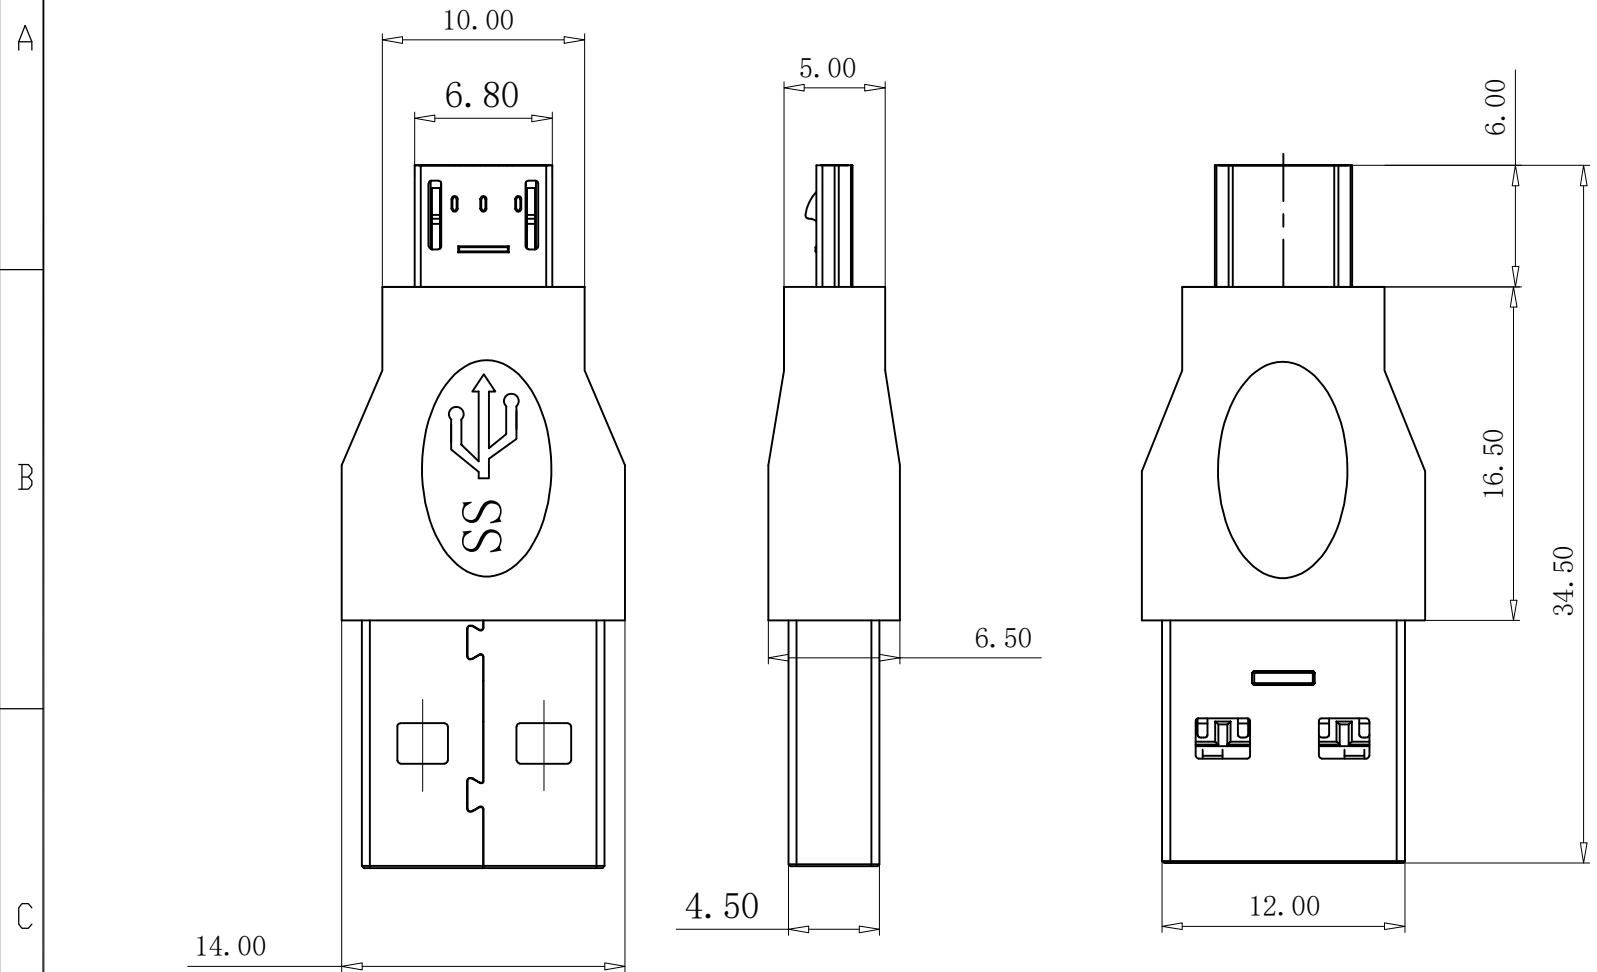

PIN ASSIGNMENT

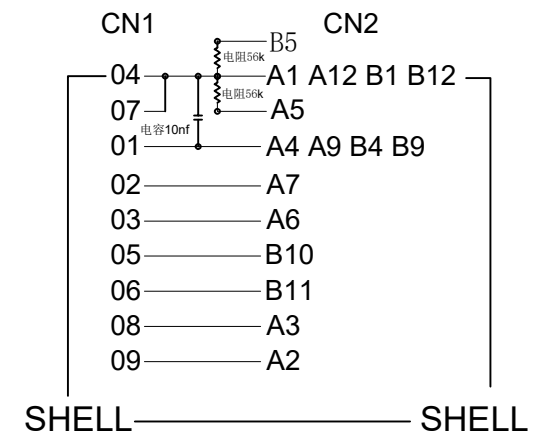

3	MICRO BM		STEEL SHELL NICKEL PLATING, G/F CONTACT	1PCS
2	USB3.0 AM		SPCC SHELL NICKEL PLATING, G/F CONTACT	1PCS
1	PCBA		USB3.0 AM TO TYPE CF R: 5.1k C: 10nF, nickel plated	1PCS
Item	Name	Part Number	Description	Q'TY

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.50	X'	± 5'
.X	± 0.30	.X'	± 2'
.XX	± 0.10	.XX'	± 1'

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com

DESIGN: I.L
DATE: 2017.3.1
CHECKED: C.W
DATE: 2017.3.1
APPROVED: C.W
DATE: 2017.3.1

TITLE: Micro B MALE TO USB 3.0 A MALE OTG ADAPTER
MATERIAL: ADM30BM30AM-050
PART NO: ADM30BM30AM-050
SIZE: A4
FINISH: ADM30BM30AM-050
DWG NO: ADM30BM30AM-050

REV: A
UNIT: mm
SCALE: 1=1
QUALITY SYMBOLS: