



RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN



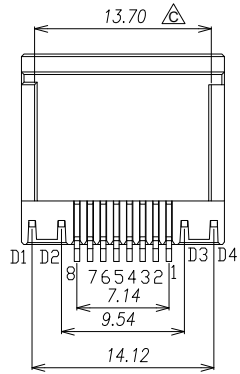


技术参数SPECIFICATION

1. 额定电压 VOLTAGE RATING: 125 VAC RMS.
2. 额定电流 CURRENT RATING: 1.5 AMP.
3. 接触电阻 CONTACT RESISTANCE: 20 mΩ MAX.
4. 绝缘电阻 INSULATION RESISTANCE: 500MΩ MIN.
5. 耐压 WITHSTAND VOLTAGE: 500V AC @ 50Hz or 60Hz MIN.
6. 工作温度 OPERATING TEMPERATURE: -40° C~+85° C.
7. 插拔力 MATING AND UNMATING FORCE: 22 N MAX.
8. 寿命 DURABILITY :750 CYCLES MIN.

第室 MATERIAL:

1. 壳体第室 HOUSING PLASTIC: LCP, BLACK, UL94V-0.
2. 端子 TERMINAL :C5191.
3. 镀层 PLATING : GOLD PLATING ON CONTACT AREA. NICKEL UNDERPLATING OVERALL.

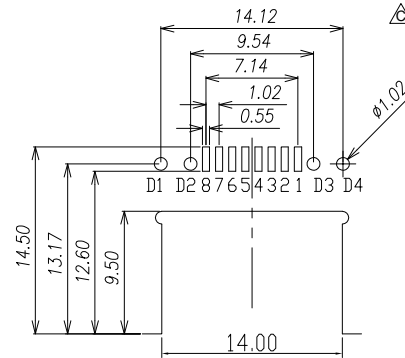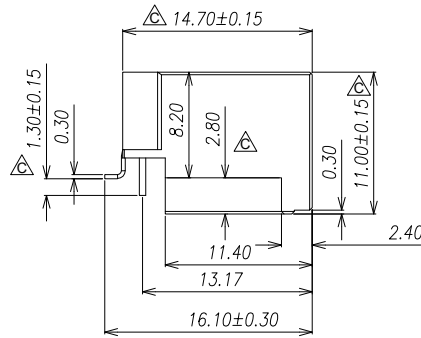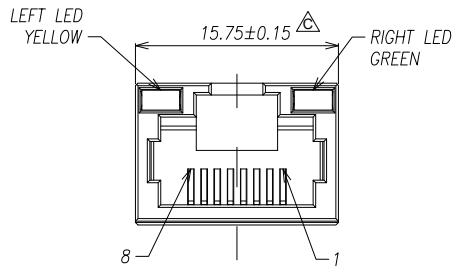

△ 为QC管控尺寸

PART NO. INFORMATION

RJ01- X 1 C X - 078


CONTACT PLATED
 1: G/F 2: AU 3U"
 3: AU 5U" 4: AU 10U"
 5: AU 15U" 6: AU 30U"

PACKAGE
 R: TAPE REEL
 T: TRAY

LED COLOR:
 1:L-YELLOW R-GREEN
 2:L-GREEN R-YELLOW

HOUSING:
 A:LCP BLACK
 C:PBT BLACK

B:PA9T BLACK

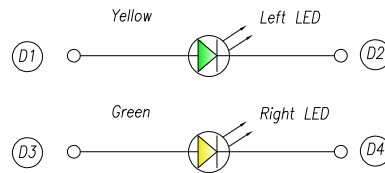

Recommend PCB Layout
 (Jack Top View)
 Tolerance: ±0.05mm
 Recommend PCB Thickness: 1.6mm

Emitting Color	λpeak	VF@IF=20mA	IR@VR=5V
Green	565	1.8-2.4V	10µA max
Yellow	585	1.8-2.4V	10µA max

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.35	.X*	± 3*
.XX	± 0.25	.X*	± 2*
.XXX	± 0.15	.XX*	± 1*

Website:www.bsc-elec.com
 Email:bestcreate@bsc-elec.com

DESIGN: I.L DATE: 2017.3.1

CHECKED: C.W DATE: 2017.3.1

APPROVED: C.W DATE: 2017.3.1

TITLE: MID MOUNT 2.8MM RJ45 CONNECTOR

MATERIAL:	PART NO: RJ01-X1CX-078	SIZE: A4
FINISH:	DWG NO: RJ01-X1CX-078	

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------