
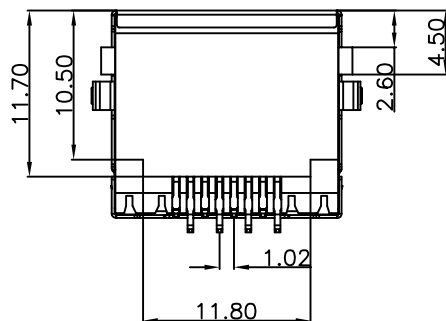
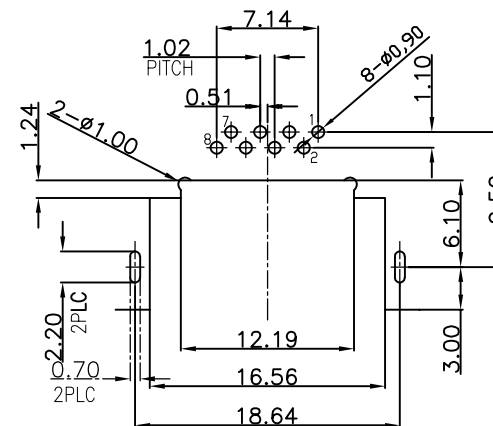





RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

SPECIFICATION

- CURRENT RATING:1.5 AMP.
- VOLTAGE RATING:125 VAC RMS.
- INSULATION RESISTANCE:500 MEGOHMS MIN.
- WITHSTAND VOLTAGE:
DC 500V RMS 50Hz or 60Hz MIN.
- CONTACT RESISTANCE:40 MILLIOHMS MAX.
- DURRABILITY:750 MATING CYCLES MIN.
- MATING/UNMATING FORC:2.24 KG. F MAX.
- OPERATION TEMPERATURE: -40°C~+85°C.
- STORAGE TEMPERATURE: -40°C~+85°C.



PCBLAYOUT

TOL:±0.05

PART NO. INFORMATION

RJ01- X 5 X X - 105

CONTACT PLATED

- 1: G/F
- 2: AU 3U"
- 3: AU 6U"

PACKAGE
R: TAPE REEL
T: TRAY

HOUSING:

- 1:PBT BLACK
- 2:LCP BLACK
- 3.PA46 BLACK

3	SHELL	1	C2680 T=0.2mm NI PLATING		
2	TERMINAL	8	C5191 T=0.25mm Au PLATING ON CONTACT AREA, TIN PLATING ON SOLDER AREA, NI PLATING ALL AREA.		
1	HOUSING	1	LCP UL94V-0 BLACK		
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.35	X.'	± 3'
.XX	± 0.25	.X'	± 2'
.XXX	± 0.15	.XX'	± 1'

Website:www.bsc-elec.com

Email:bestcreate@bsc-elec.com

DESIGN:	DATE:	TITLE:	
I. L	2017. 3. 1	MID MOUNT8.8MM RJ45 CONNECTOR DIP TYPE H=9.9MM	
CHECKED:	DATE:	MATERILA:	PART NO:
C. W	2017. 3. 1		RJ01-X5XX-105
APPROVED:	DATE:	FINSH:	DWG NO:
C. W	2017. 3. 1		RJ01-X5XX-105
			SIZE: A4

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------