
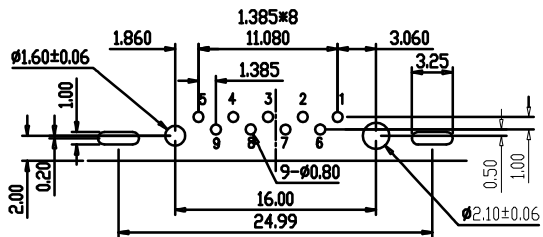
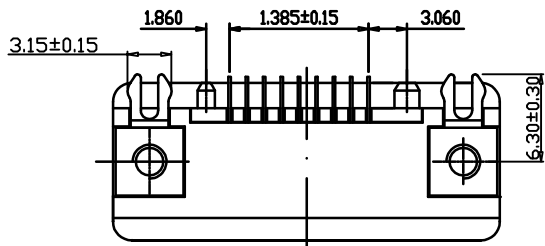
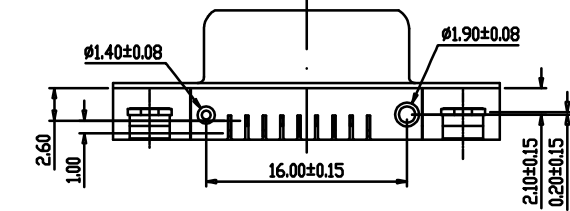



RoHS Compliant


REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

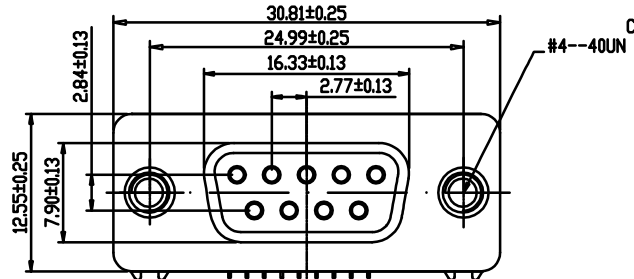

RECOMMENDED P.C.B. LAYOUT

NOTE:

- MATERIALS AND FINISHED
INSULATOR : PBT+30% GF UL 94V-0,
SHELL : STEEL, NI FINISHED
CONTACT MATERIAL:BRASS, SELEVITE GOLD FINISHED
HARPOON:STEEL,SN FINISHED
RIVET:COPPER ALLOY ,NI FINISHED
WITH #4-40 THREADED ASSEMBLED
- ELECTRICAL CHARACTERISTICS
CURRENT RATING : 1.0 AMP DC
VOLTAGE RATING: 300 V DC
CONTACT RESISTANCE :20 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
INSULATION RESISTANCE : 1000 MEGAOHMS MIN.
- MECHANICAL
MATING FORCE:5.5Kgf MAX.
UNMATING FORCE:1.0 Kgf MIN
- ENVIRONMENTAL
OPERATING TEMPERATURE: -55°C ~ +85°C
STORAGE TEMPERATURE:-55°C ~ +105°C
- HOW TO ORDER:

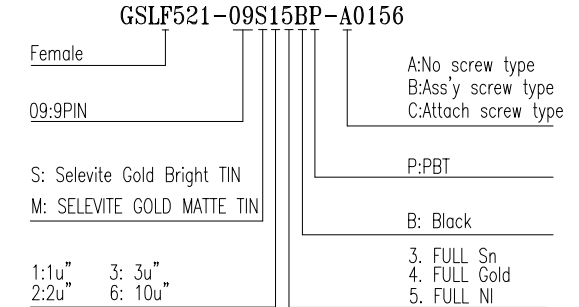

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.38	.X'	± 2'
.XX	± 0.25	.X''	± 1'
.XXX	± 0.15	.X'''	± 0.5'

Website:www.bsc-elec.com

Email:bestcreate@bsc-elec.com

DESIGN:

I. L

CHECKED:

C. W

APPROVED:

C. W

DATE:

2017. 3. 1

DATE:

DATE:

2017. 3. 1

TITLE:

MID MOUNT D SUB 9P FEMALE SLIM CONNECTOR, TAIL:2.5MM

MATERILA:

FINSH:

PART NO:

DWG NO:

SIZE:


A4

REV: A

UNIT mm

SCALE 1=1

QUALITY SYMBOLS



1

2

3

4

5

6

7

8