
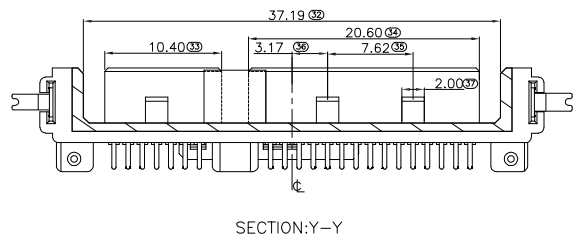
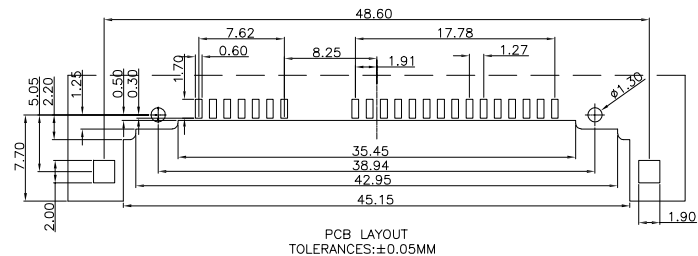
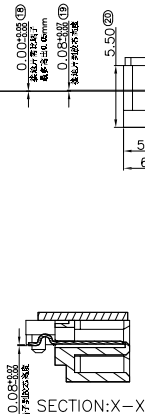
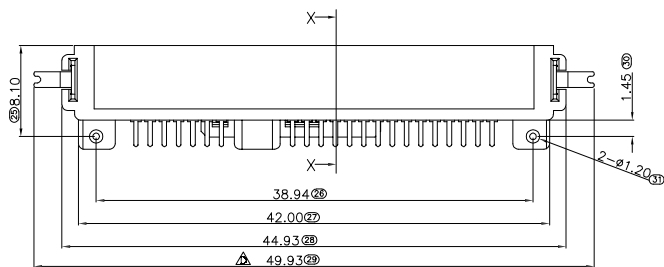
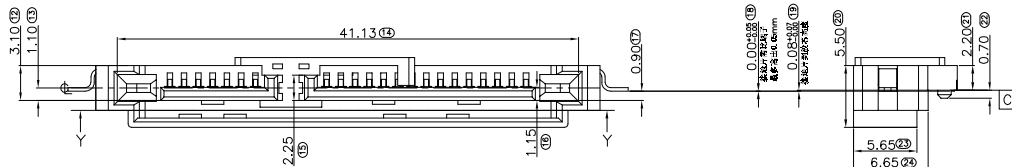



RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

SPECIFICATION:

- MATERIAL:
 - HOUSING:LCP 30% G/F UL 94V-0
 - COLOR:BLACK
 - CONTACT:BRASS C2680R-H,T=0.25mm
 - PEG: BRASS C2680R-H,T=0.30mm
- FINISH:
 - CONTACT:1u",3u",5u",15u"GOLD/TIN PLATING ON CONTACT
 - AREA 100u" MIN.TIN-LEAD PLATING ON
 - SOLDERTAILS 50u" MIN.NICKEL UNDERPLATING
 - OVER ALL
- ELECTRICAL:
 - CURRENT RATING:1.5 AMPERE PER CONTACT
 - CONTACT RESISTANCE:30 MILLIOHMS MAX
 - INSULATION RESISTANCE:1000 MEGOHMS MIN
 - DIELECTRIC WITH STANDING VOLTAGE:500 VDC
 - OPERATING TEMPERATURE: -40°C ~ +85°C
- THE MARK (XX) DIMENSIONS MUST BE MEASURED BY FAI.

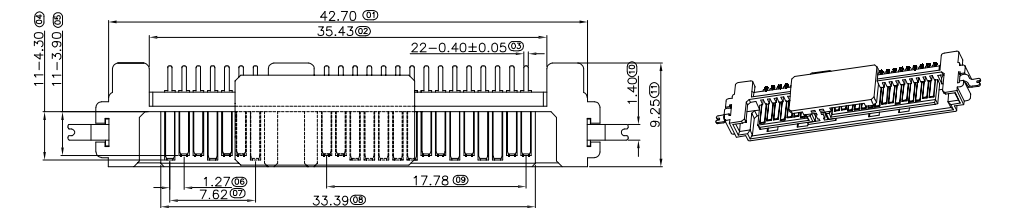

PART NO. INFORMATION

S715 - M X A 5 T -003-V1

GENDER
F: FEMALE
M: MALE

PACKAGE
T: TRAY
R:TAPE REEL

CONTACT PLATED
1: GOLD FLASH/TIN
2: 15U" GOLD/TIN
3: 30U" GOLD/TIN

HOUSING COLOR
5: BLACK

HOUSING MATERIAL
A: LCP

NO.	DESCRIPTION	MATERIAL	COLOR	REMARK
3	Peg	Brass C2680		Tin/Ni Plated
2	Terminal	Brass C2680		Gold/Tin Plated
1	Housing	High Temp	Black	UL 94V-0

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.30	X.*	± 3'
.X	± 0.20	.X*	± 2'
.XX	± 0.15	.XX*	± 1'

Website: www.bsc-elec.com
E-mail: bestcreate@bsc-elec.com

DESIGN: I. L
DATE: 2017. 3. 1

CHECKED: C. W
DATE: 2017. 3. 1

APPROVED: C. W
DATE: 2017. 3. 1

TITLE:
MID MOUNT SATA 7+15 PLUG SMT H=0. 9

MATERILA: PART NO: S715-MXA5T-003-V1 SIZE: A4

FINSH: DWG NO: S715-MXA5T-003-V1 SHEET: 1 OF 3

REV: A
UNIT: mm
SCALE: 1=1

QUALITY SYMBOLS