

RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流:Current Rating
1.5A/contact terminal
2. 额定电压:Voltage Rating
30V DC
3. 接触阻抗>Contact Resistance
30 milliohms MAX
4. 耐电压:Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

1. 插拔力:Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
2. 端子保持力:Terminal Retention
1.2kgf(MIN)

原材料:Material:




1. 塑胶:Housing:
High Temperature Thermoplastics,
UL 94V-0 PBT/LCP White/Black
2. 端子>Contact:Copper Alloy C2680
3. 外壳:Shell:SPCC

电镀:Finish:

1. 端子>Contact:Plated Gold in Mating Area;
Tin On Solder Tails
2. 外壳:Shell:
Nickel Plating

PART NO. INFORMATION

U02-A M X X 5 T - 001

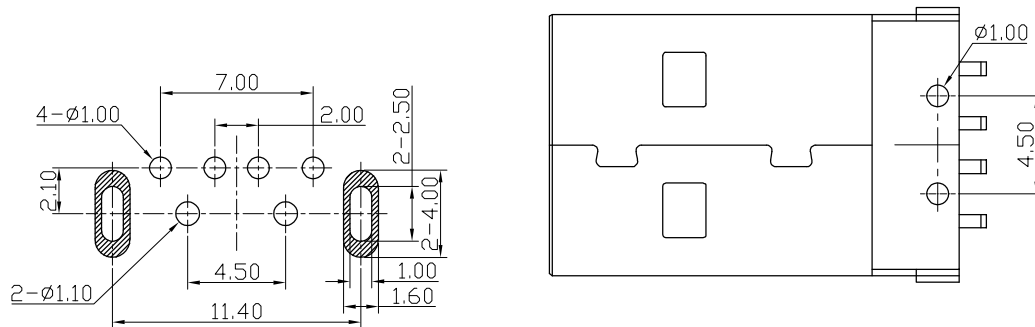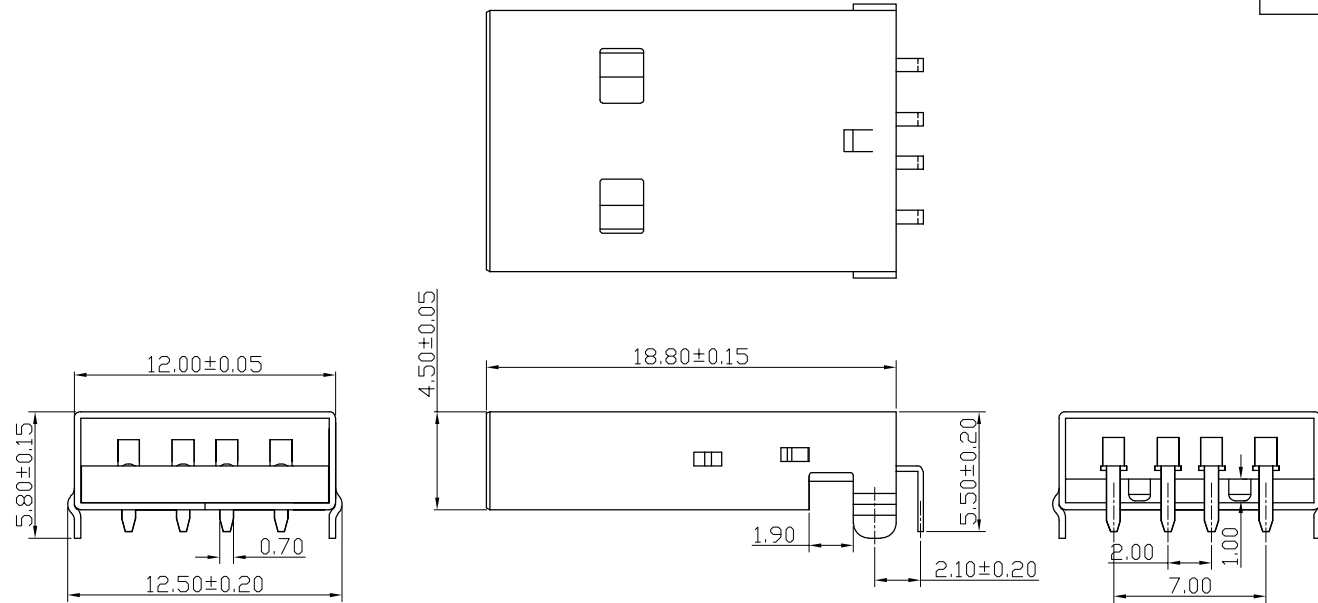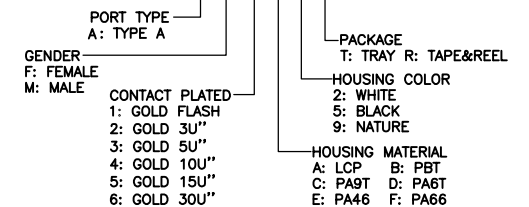

P. C. B LAYOUT

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.50	X.*	± 5°
.X	± 0.30	.X*	± 2°
.XX	± 0.20	.XX*	± 1°

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN: I. L DATE: 2017.3.1

CHECKED: C. W DATE: 2017.3.1

APPROVED: C. W DATE: 2017.3.1

TITLE: MID-MOUNT USB 2.0 A/M DIP TYPE

MATERILA: FINSH: PART NO: U02-AMXX5T-001 SIZE: A4

DWG NO: U02-AMXX5T-001

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------