

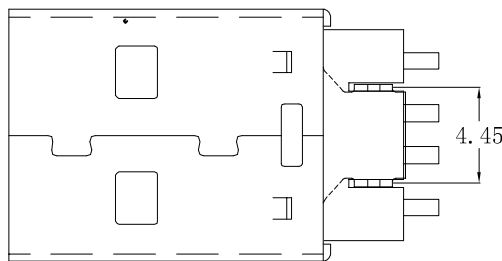
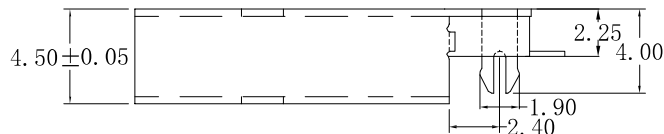



RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

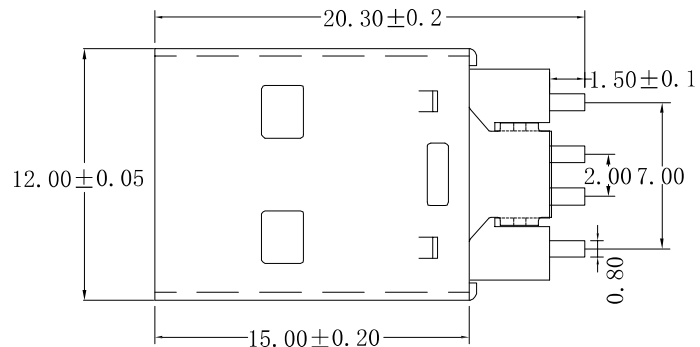

RECOMMENDED PCB LAYOUT

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voi
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
100MEGA ohms MIN

原材料: Raw material:


1. 塑胶: HOSUING
Hing Temperature Ternmaplastics,
UL 94V-0 LCP/PBT Black/WHITE
2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: SPCC

电镀: Electroplate:

1. 端子: Contact: Plated Gold in Mati
Tin On Solder Talls
2. 外壳: Shell:
Nickel Plating

PART NO. INFORMATION

U02-A M X X 5 T - 007

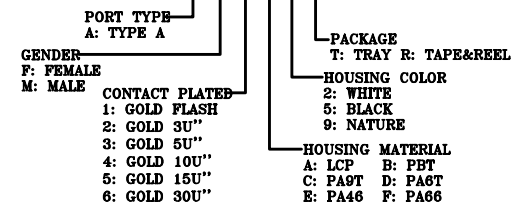

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.50	X.*	± 3'
.X	± 0.30	.X'	± 2'
.XX	± 0.20	.XX'	± 1'

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com

DESIGN: I.L. DATE: 2017.3.1

CHECKED: C.W. DATE: 2017.3.1

APPROVED: C.W. DATE: 2017.3.1

TITLE: MID MOUNT USB 2.0 A/M SHORT BODY

MATERILA: FINSH: PART NO: U02-AMXX5T-007 SIZE: A4

DWG NO: U02-AMXX5T-007

REV: A UNIT mm SCALE 1=1 QUALITY SYMBOLS