


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

NOTE:

- ELECTRICAL CHARACTERISTICS;
  - CONTACT RESISTANCE: 80mΩ Max
  - CONTACT CURRENT RATING: 1.5 A
  - DIELECTRIC WITHSTANDING VOLTAGE: 100 V R. M. S.
  - INSULATION RESISTANCE 100 MEGOHMS Min
  - OPERATING TEMPERATURE: -25° C ~ 75° C
- MECHANICAL CHARACTERISTICS:
  - MATING FORCE: USB CM 5~20N & MICRO USB 35N Max.
  - UNMATED FORCE: USB CM 8~20N & MICRO USB 10N Min.
- PLATING
  - TERMINAL CONTACT: (SEE TAB) GOLD PLATING ALL OVER 50u"MIN NICKEL
  - SHELL: 50u"MIN. NICEL ALL OVER

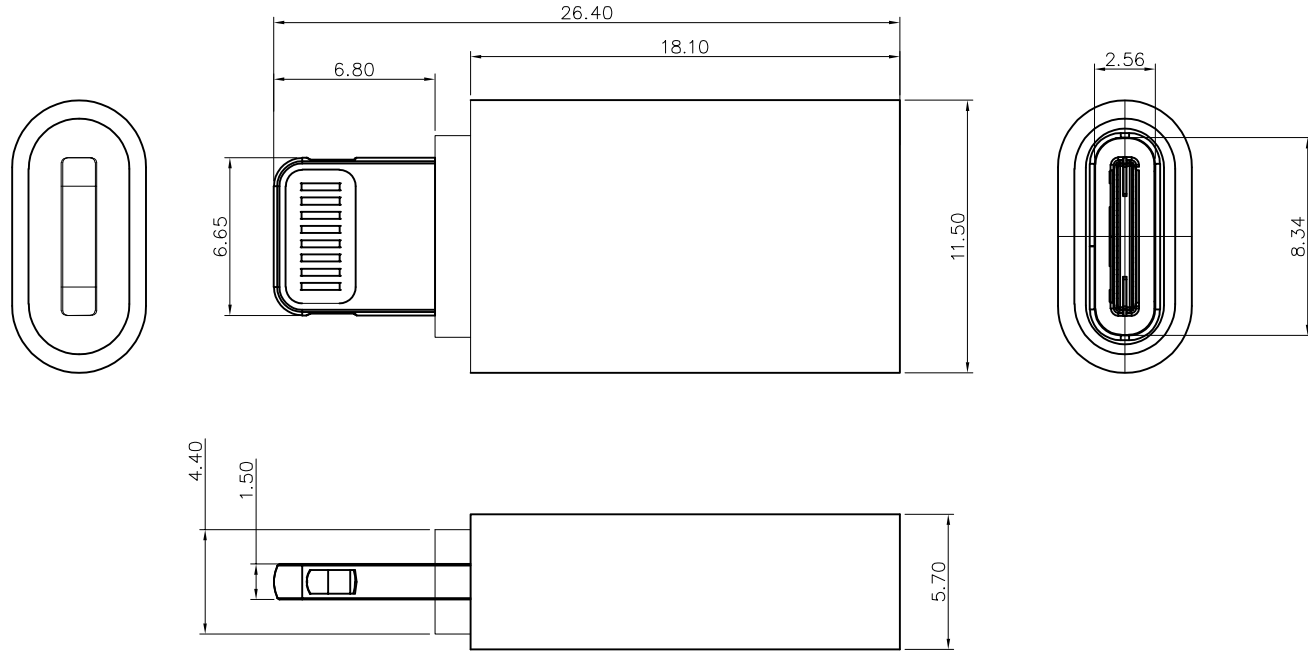

Color
White
Green
Black

3	Plastic Shell		TYPE CF plastic shell,,color: Silver&golden&black	1PCS
2	PVC		PVC 45P,COLOR: WHITE&BLACK	0.005KG
1	PCBA		TYPE CF TO AP DAI IC OHM, NICKEL PLATED	1PCS
Item	Name	Part Number	Description	Q'TY

<b>Bestcreate Technology Limited</b>			TOLERANCES UNLESS OTHERWISE SPECIFIED:		DESIGN: I.L	DATE: 2017.3.1	TITLE: AP CM TO USB CF ADAPTER		
			X. ± 0.50	X.' ± 5'	CHECKED: C.W	DATE: 2017.3.1			
REV: A	UNIT: mm	SCALE: 1=1	QUALITY SYMBOLS	Website: www.bsc-elec.com	APPROVED: C.W	DATE: 2017.3.1	MATERILA:	PART NO: ADAPCMCF-033	SIZE: A4
				Email: bestcreate@bsc-elec.com			FINISH:	DWG NO: ADAPCMCF-033	