
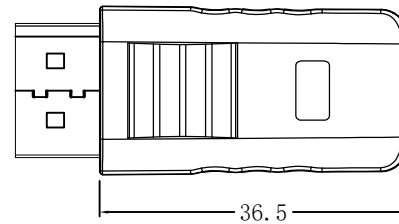

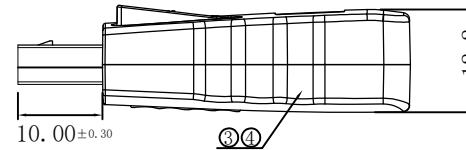



RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

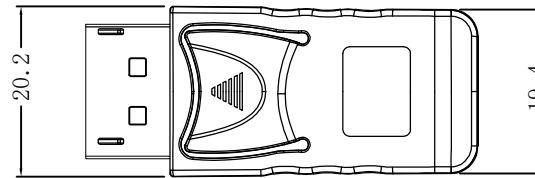

接点表

CN1	CN2	CN1	CN2
01	— 03	11	— 08
02	— 01	12	— 12
03	— 05	13	— 04
04	— 09	14	— 06
05	— 07	15	— 16
06	— 11	16	— 14
07	— 15	17	— 18
08	— 13	18	— 02
09	— 17	19	— 19
10	— 10	20	— 20
SHELL — SHELL			

注:

1. 100%短/断路&错线测试条件;
2. 导通阻抗 $\leq 5\Omega$, 绝缘阻抗 $\geq 10M\Omega$. 高压测试, DC 300V/10mS.
3. 产品采用PCB板连接.

4	外型	ABS胶料 黑色 (倒扣)	2PCS
3	内连接	PCB板 T=1.6MM	1PCS
2	连接器	DP 20P MINI (F) 铁体镀镍 PIN针镀金	1PCS
1	连接器	DP 20P (M) 铁体镀镍 PIN针镀金	1PCS
序号	名称	材料	用量

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.50	X.*	± 5'
.X	± 0.30	.X*	± 2'
.XX	± 0.10	.XX*	± 1'

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com

DESIGN: I. L DATE: 2017. 3. 1

CHECKED: C. W DATE: 2017. 3. 1

APPROVED: C. W DATE: 2017. 3. 1

TITLE: DP 20P MALE TO MINI DP FEMALE ADAPTER 180°

MATERILA: PART NO: DPMTOMIF-006 SIZE: A4

FINSH: DWG NO: DPMTOMIF-006

REV: A UNIT: mm SCALE: 1=1 QUALITY SYMBOLS