

RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

A


B

C

A

B

C

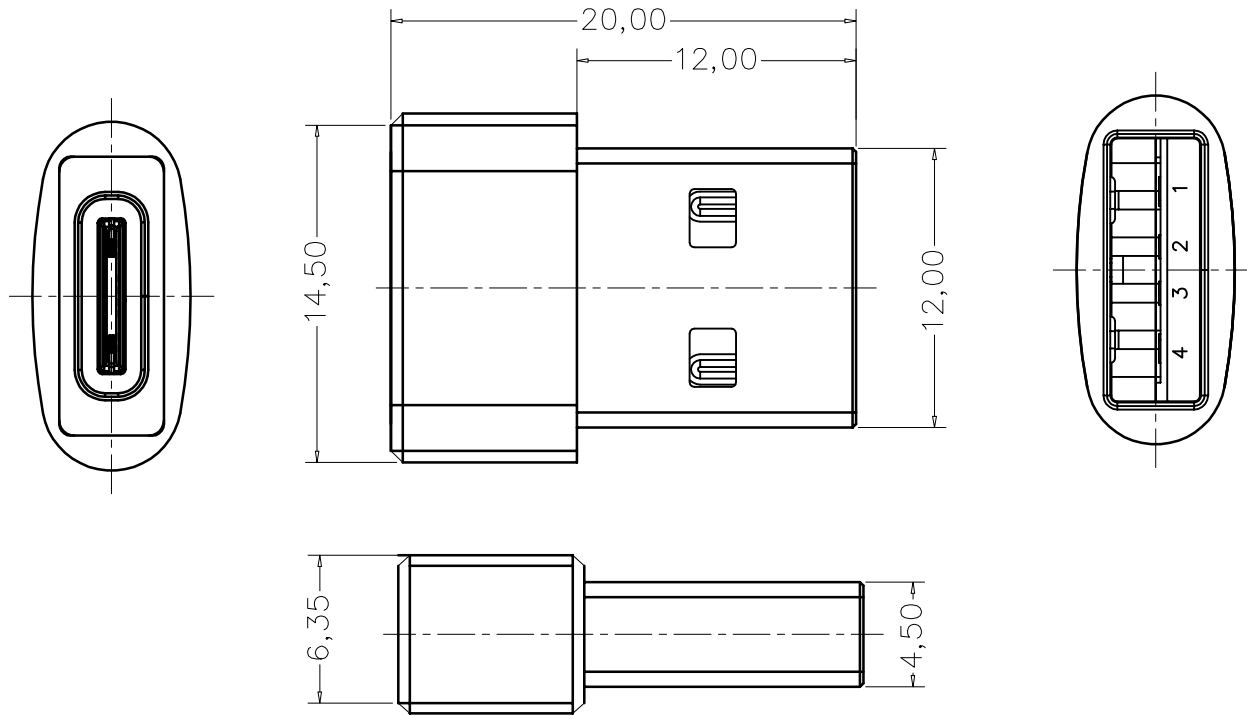

Specification

- 1、NAME: Type-Cf to AM2.0 ADAPTER
 - 2、SPECIFICATION: 23.2*15.*6.35MM
 - 3、COLOR: OEM
 - 4、Electric Current /Voltage :5V/3A 20Vmax
 - 5、LIFETIME: 10000CYCLES
 - 6、ALUMINUM CASE: L11MM
 - 7、Strap: OEM
 - 8、Primary Attachments: CF+USB2.0AM
 - 9、Internal Model : PVC 45P BLACK
- Test Standard**
- 1、100% open short test
 - 2、DC 300 10MΩ/ AC300 0.5mA
 - 3、Conductor Resistance:3MΩ max
 - 4、Operating Environment -40° C ~ 85° C
 - 5、Transfer Rate: 10Gbps/Sided
 - 6、NO Material Shortage、Scratch、Smirch、Mixtz ETC...ON APPERANCE

PVC45P BLACK-1PCS	OUTER MOLD	4
Type-C FEMALE FOR 0.8MM PCB-1PCS	TYPE-CF	3
USB2.0 AM FOR 0.8 PCB-1PCS	USB MALE	2
Aluminum1 SHELL 1MM -1PCS	Aluminum	1
Spec Description	P/N	NO.

D

D

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.50	X.*	± 5°
.X	± 0.30	.X*	± 2°
.XX	± 0.10	.XX*	± 1°

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN: I.L DATE: 2017.3.1

CHECKED: C.W DATE: 2017.3.1

APPROVED: C.W DATE: 2017.3.1

TITLE: USB2.0 AM TO USB TYPE CF ADAPTER

MATERILA: PART NO: AD20AMCF-023 SIZE: A4

FINSH: DWG NO: AD20AMCF-023

REV: A UNIT mm SCALE 1=1 QUALITY SYMBOLS

1

2

3

4

5

6

7

8