

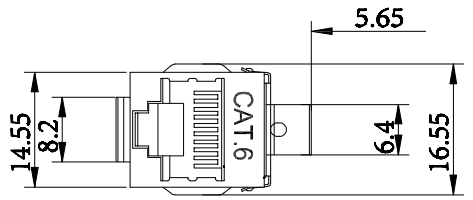
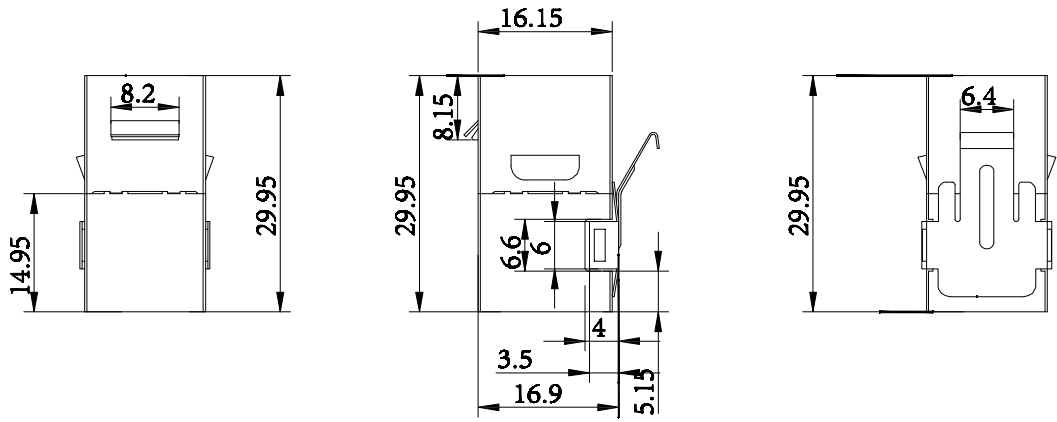


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

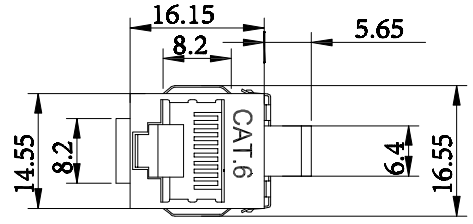

MATERIAL:

HOUSING: ABS,UL94V-0 .
 TERMINAL: ROUND Ø0.46MM 3U
 SHIELD: C2680,T=0.20MM,20 MIN NICKEL PLATING ON ALL AREA.

MACHANICAL:

DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
 OPERATING TEMPERATURE: -20 °C~+75 °C.
 STORAGE TEMPERATURE: -40癸~+85癸.
 ALL CRITICAL DIMENSIONS WITH "±"

ELECTRICAL:

VOLTAGE: 125 VOLTS AC.
 CURRENT RATING :1.5AMP.
 DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
 INSULATION RESISTANCE: 500 MEGA OHMS MIN @ 500V DC.
 CONTACT RESISTANCE: 30 MILLIOHMS MAX.

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.35	X.*	±	3'
.X	±	0.30	.X'	±	2'
.XX	±	0.25	.XX'	±	1'

Website:www.bsc-elec.com
 Email:bestcreate@bsc-elec.com

DESIGN: DATE:

I. L 2017. 3. 1

CHECKED: DATE:

C. W 2017. 3. 1

APPROVED: DATE:

C. W 2017. 3. 1

TITLE:

RJ45 8P8C CAT. 6 STP ADAPTER, L=30MM

MATERILA: PART NO:
 STP-S-5966-CAT-6-30MM

SIZE: A4

FINSH: DWG NO:
 STP-S-5966-CAT-6-30MM

REV: A UNIT mm

SCALE 1=1

QUALITY SYMBOLS