
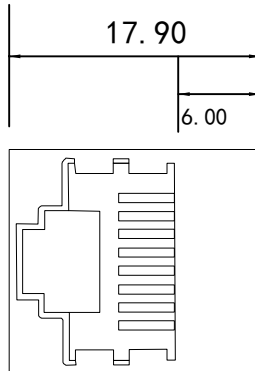


RoHS Compliant




REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

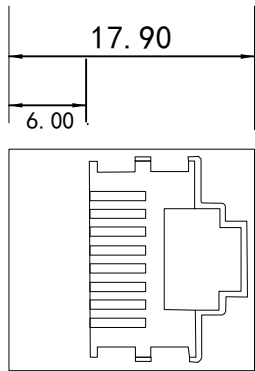

MATERIAL:
 HOUSING: ABS,UL94V-0.
 TERMINAL: PHOSPHOR BRONZE T=0.35MM,
 3U" GOLD PLATING ON CONTACT AREA.
 SHIELD: C2680,T=0.20MM,20 MIN NICKEL PLATING
 ON ALL AREA.

MACHANICAL:
 DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
 OPERATING TEMPERATURE: -20 °C~+75 °C.
 STORAGE TEMPERATURE: -40°C~+85°C.
 ALL CRITICAL DIMENSIONS WITH "**"

ELECTRICAL:
 VOLTAGE: 125 VOLTS AC.
 CURRENT RATING :1.5AMP.
 DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
 INSULATION RESISTANCE: 500 MEGA OHMS MIN @ 500V DC.
 CONTACT RESISTANCE: 30 MILLIOHMS MAX.

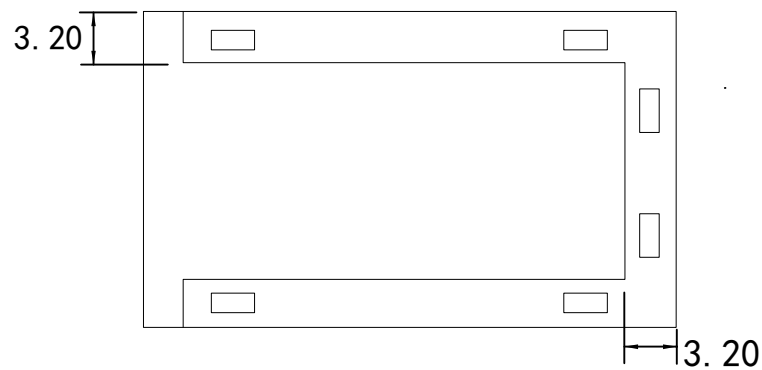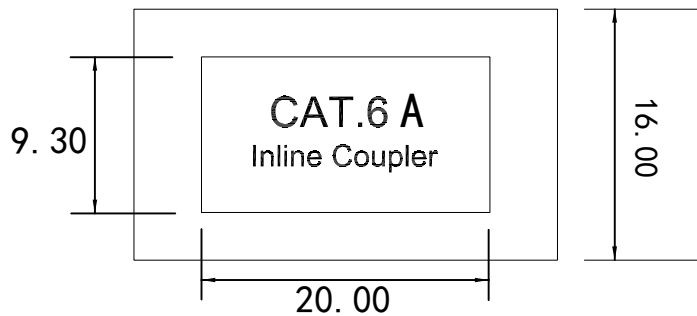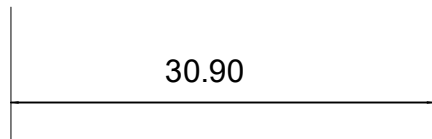

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.35	X.*	±	3'
.X	±	0.30	.X*	±	2'
.XX	±	0.25	.XX*	±	1'

Website:www.bsc-elec.com
 Email:bestcreate@bsc-elec.com

DESIGN: I. L. DATE: 2017. 3. 1

CHECKED: C. W. DATE: 2017. 3. 1

APPROVED: C. W. DATE: 2017. 3. 1

TITLE: RJ45 CAT. 6A STP INLINE COUPLER ADAPTER

MATERILA: STP-S-5966-CAT-6A-31MM PART NO: STP-S-5966-CAT-6A-31MM SIZE: A4

FINSH: DWG NO: STP-S-5966-CAT-6A-31MM

REV: A UNIT mm SCALE 1=1 QUALITY SYMBOLS