

RoHS Compliant





REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

A

B

C

D

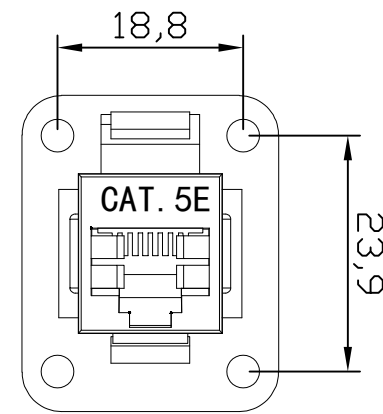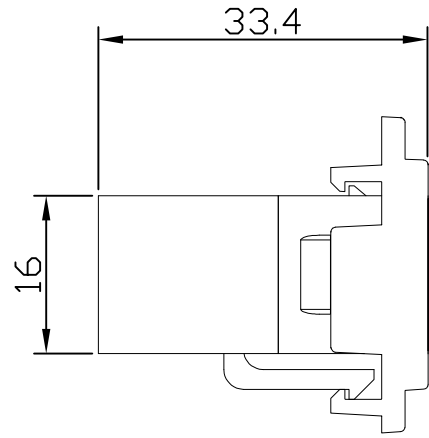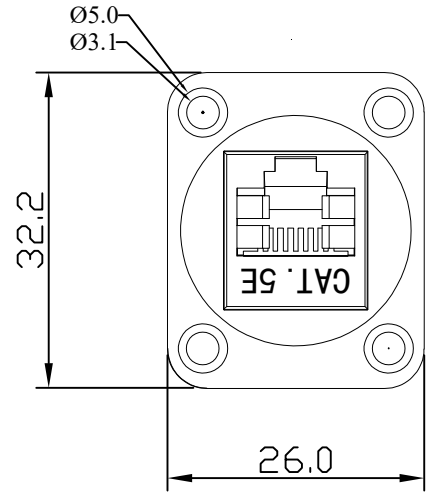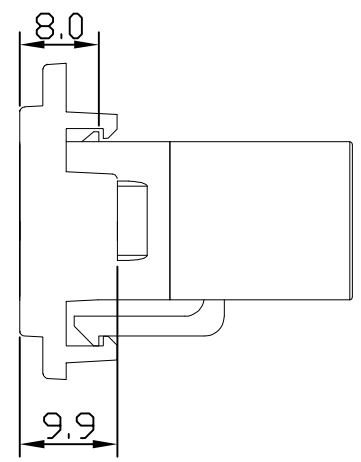

DESCRIPTION:

1. SUITABLE FOR COMMUNICATION OF THE EQUIPMENT AND WORKING AREA, IN ORDER TO ACHIEVE SIGNAL TRANSMISSION
2. COMPACT STRUDTURE AND DURABLE
3. LIFETIME 750 CYCLES
4. CONTACT RESISTANCE $\leq 2.5\text{M}\Omega$
5. HIGH PRESSURE RESISTANT: DC700V 1MIN
6. INSULATION RESISTANCE $\geq 1000\Omega$
7. HOUSING: ABS APET
8. TERMINAL: PHOSPHOR BRONZE T=0.35MM
9. WITH HOLE FLANGE: ZINC ALLOY ELECTROPLATE ON SURFACE

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.30	X'	±	3'
.X	±	0.20	.X'	±	2'
.XX	±	0.15	.XX'	±	1'

Website: www.bsc-elec.com
 Email: bestcreate@bsc-elec.com

DESIGN:	DATE:
I. L	2017. 3. 1
CHECKED:	DATE:
C. W	2017. 3. 1
APPROVED:	DATE:
C. W	2017. 3. 1

TITLE:		
RJ45 8P8C CAT5E SEMI-SHIELDED ADAPTER		
MATERILA:	PART NO:	SIZE:
	AD-CAT5E-001	A4
FINSH:	DWG NO:	
	AD-CAT5E-001	

REV:	UNIT	SCALE	QUALITY SYMBOLS
A	mm	1=1	