
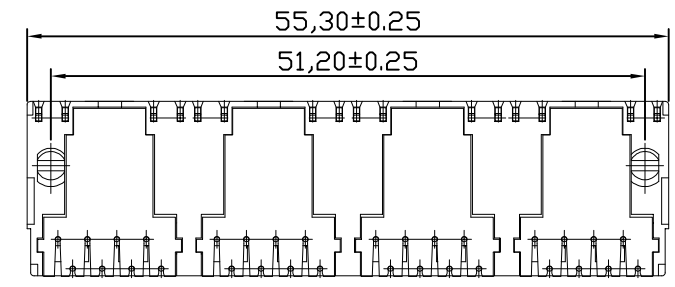
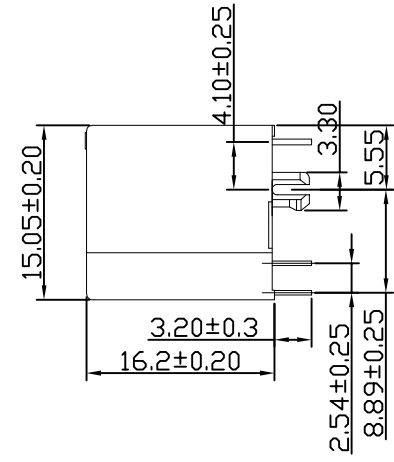


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

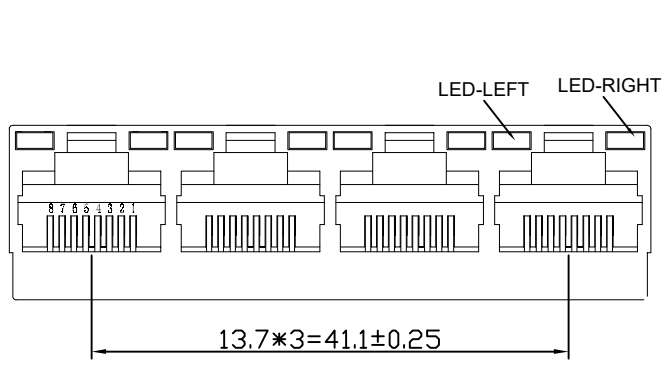



NOTES

MATERIAL
 1. HOUSING MATERIAL : THERMO PLASTICS UL94V-0.
 2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
 3. PLATING : GOLD FLASH PLATING OVER NICKEL.

ELECTRICAL
 1. VOLTAGE RATING : 125 VAC RMS.
 2. CURRENT RATING : 1.5 AMP.
 3. CONTACT RESISTANCE : 40 MILLIOHMS MAX.
 4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 100V DC .
 5. DIELECTRIC DIELECTRIC RESISTANCE : 500V DC RMS 50Hz. 1MIN.

MECHANICAL
 1. DURRABILITY : 750 CYCLES MIN.
 2. MATING/UNMATING FORC: 2.24 KG.F MAX.

ENVIRONMENTAL:
 1. OPERATION : -40°C~+85°C.
 2. STORAGE : -40°C~+85°C.

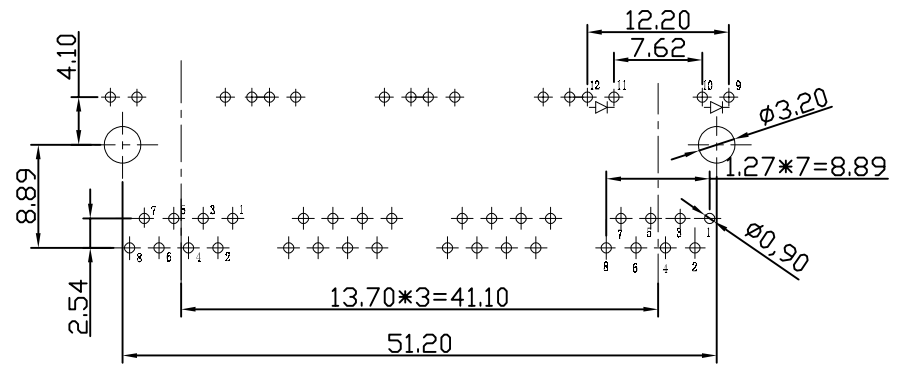

PART NO. INFORMATION

RJ01- X X A T - 101

CONTACT PLATED
 1: G/F 2: AU 3U"
 3: AU 6U" 4: AU 10U"
 5: AU 15U" 6: AU 30U"

LED COLOR:
 1:L-YELLOW R-GREEN
 2:L-GREEN R-YELLOW

PACKAGE
 T: TRAY
 HOUSING:
 A:PBT BLACK
 B:PBT YELLOW 114C

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.35	X.'	± 3'
.XX	± 0.25	.X'	± 2'
.XXX	± 0.15	.XX'	± 1'

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------

Website: www.bsc-elec.com
 Email: bestcreate@bsc-elec.com

DESIGN: I. L	DATE: 2017. 3. 1
CHECKED: C. W	DATE: 2017. 3. 1
APPROVED: C. W	DATE: 2017. 3. 1

TITLE: 5224 VERTICAL DIP 1X4 RJ45 CONNECTOR WITH LED		
MATERILA:	PART NO: RJ01-XXAT-101	SIZE: A4
FINSH:	DWG NO: RJ01-XXAT-101	