


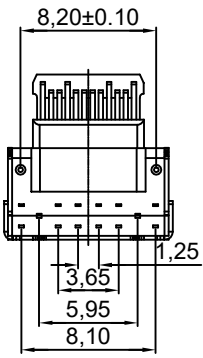



RoHS Compliant



A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

1. 材料
 A. 主体: LCP, 黑色, 白色, UL 94-V0;
 B. 端子: 铜合金, 电镀刷金;
 C. 外壳: 不锈钢, 镀全镍;

2. 主要特性
 A. 电压等级: 20V AC;
 B. 电流: 3A;
 C. 工作温度: -40°C~85°C;

3. 电气要求:
 A. 接触电阻: 40mΩ Max, (初始), 50mΩ Max. (最后);
 B. 电压: 100V AC 1分钟;
 C. 绝缘电阻: 100MΩ min. DC 500v;

4. 机械性能:
 A. 插入力: 5~20N. (从1~10,000次);
 B. 拔出力: 8~20N. (从1~1,000次);
 6~20N. (从1,001~10,000次);
 C. 耐久性寿命: 10,000次;

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
4	SHELL	STAINLESS STEEL	Ni Plated	1PCS
3	MD	HIGH TEMPERATURE PLASTIC	BLACK	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS

PART NO. INFORMATION
U06-C F X X 5 R - 038

PORT TYPE
 C: TYPE C

GENDER
 F: FEMALE
 M: MALE

CONTACT PLATED
 1: GOLD FLASH
 2: GOLD 3U"
 3: GOLD 5U"
 4: GOLD 10U"
 5: GOLD 15U"
 6: GOLD 30U"

PACKAGE
 R: TAPE REEL

HOUSING COLOR
 2: WHITE
 5: BLACK
 9: NATURE

HOUSING MATERIAL
 A: LCP B: PBT
 C: PA9T D: PA6T
 E: PA46 F: PA66

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:			
X.	± 0.30	X.*	± 5*
.X	± 0.15	.X*	± 2*
.XX	± 0.10	.XX*	± 1*

Website: www.bsc-elec.com
 Email: bestcreate@bsc-elec.com

DESIGN: I. L	DATE:
CHECKED: C. W	DATE:
APPROVED: C. W	DATE:

TITLE: USB TYPE C 18W FOR EU, H=5.35		
MATERILA:	PART NO: U06-CFXX5R-038	SIZE: A4
FINSH:	DWG NO: U06-CFXX5R-038	

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
-----------	------------	--------------	-----------------