


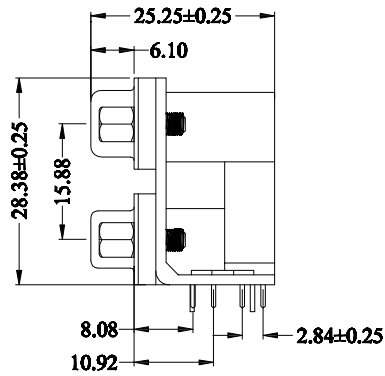


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

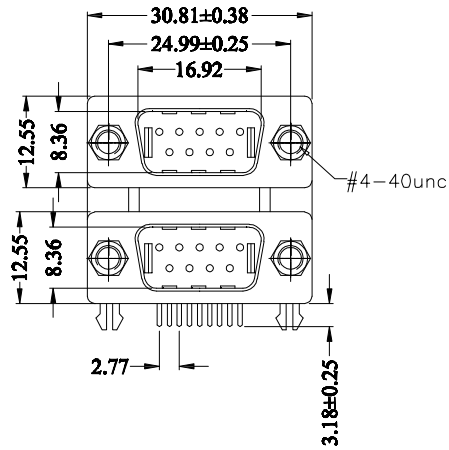

**MATERIALS AND FINISH**

SHELL : STEEL MATERIAL, NICKEL FINISHED  
 DIMPLES ON PLUG ONLY  
 INSULATOR : PBT THERMOPLASTIC, 30% GLASS  
 FILLED, UL 94V-0 RATED, BLACK COLOR  
 CONTACT MATERIAL : BRASS  
 CONTACT FINISH : SELECTIVE GOLD FINISHED  
 GROUNDING BRACKET : ZINC ALLOY, ZINC PLATED

**ELECTRICAL CHARACTERISTICS**

CONTACT CURRENT RATING : 1.0 AMPS  
 CONTACT RESISTANCE :20 MILLIOHMS MAX.  
 DIELECTRIC WITHSTANDING VOLTAGE : 500 V AC MIN.  
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN.  
 TEMPERATURE RATING : -55°C ~ +105°C

**HOW TO ORDER:**

**DL201X-18SX511-XX320**

Male+M	6: RoHs&W/O Boardlock
DR+DR	4: RoHs&W/O Upper Boardlock
2: DimX/Y=19.05/31.60	3: RoHs&W/O LowerBody 0:ROHS
1: DimX/Y=15.88/28.43	3: Lower-DR 8.08
18: H09Pin+H09Pin	3: Quad Arrowhead Boardlock (8.08x8.0)
S:Selevite Gold Bright TIN	K: 5.8*12.8 Hexagonal Screw(iron)
M:Selevite Gold Matte TIN	J: 5.8*12.8 Hexagonal Screw(copper)
1:G/F 5: 5u"	6: 4.8*11.8 Hexagonal Screw(iron)
2:2u" 6: 10u"	5: 4.8*11.8 Hexagonal Screw(copper)
3:3u" 7: 15u" 9: 1u"	0: W/O Screw
5. Full Ni(Shell)	C: Attach screw type
	B: Ass'y screw type
	A: No screw type
	1: PBT+PBT
	G: Upper-Green, Lower-Blue
	8: Upper-Green,Lower-Black
	2: Upper-Black,Lower-Blue
	1: All Black

**Bestcreate Technology Limited**

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.35	X.*	± 3"
.XX	± 0.25	.X*	± 2"
.XXX	± 0.15	.XX*	± 1"

Website:www.bsc-elec.com  
 Email:bestcreate@bsc-elec.com

DESIGN:	DATE:
I. L	2017. 3. 1
CHECKED:	DATE:
C. W	2017. 3. 1
APPROVED:	DATE:
C. W	2017. 3. 1

TITLE:		
DR 09P MALE/DR 09P MALE 8.08		
MATERILA:	PART NO:	SIZE:
	DL201X-18SX511-XX320	A4
FINSH:	DWG NO:	
	DL201X-18SX511-XX320	

REV:	UNIT	SCALE	QUALITY SYMBOLS
A	mm	1=1	