
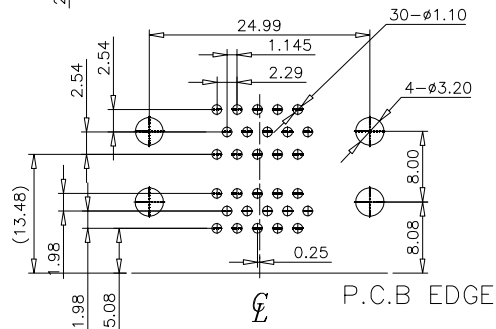
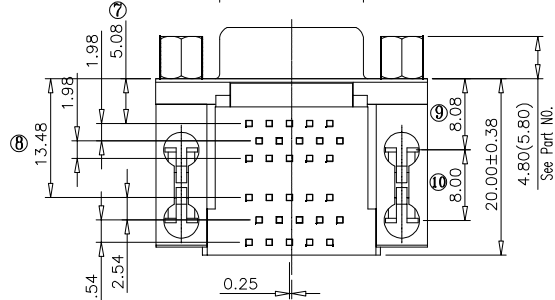
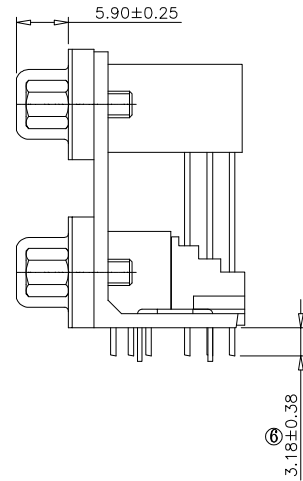


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

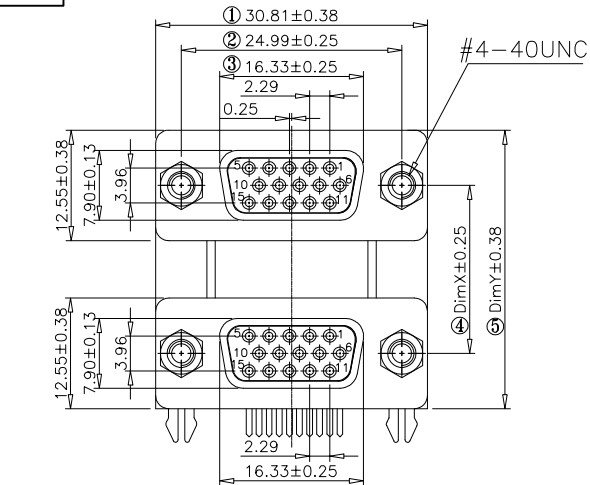


RECOMMENDED P.C.B LAYOUT

NOTE:

- 1.MATERIALS AND FINISHED
INSULATOR : LCP OR PBT+30% GF UL 94V-0,
SHELL : STEEL, NI FINISHED
CONTACT MATERIAL:BRASS, SELEVITE GOLD FINISHED
HARPOON:BRASS,SN FINISHED
RIVET:COPPER ALLOY ,NI FINISHED
WITH #4-40 THREADED ASSEMBLED
- 2.ELECTRICAL CHARACTERISTICS
CURRENT RATING : 1.0 AMP DC
VOLTAGE RATING: 300 V DC
CONTACT RESISTANCE :20 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 100 V AC MIN.
INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
- 3.ENVIRONMENTAL
OPERATING TEMPERATURE: -55°C ~ +85°C
STORAGE TEMPERATURE:-55°C ~ +105°C
- 4.HOW TO ORDER:

DL004X-30XXXX1-BX310

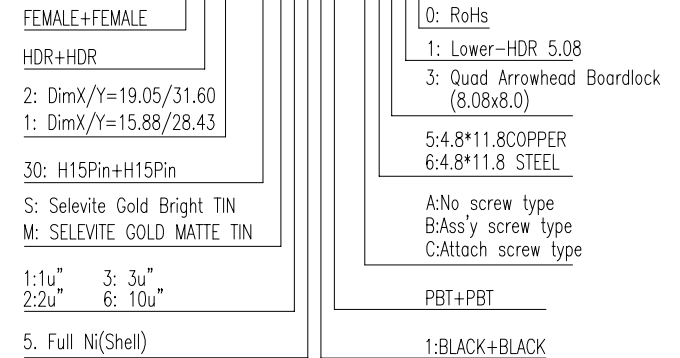

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.35	X'	± 3'
.XX	± 0.25	.X'	± 2'
.XXX	± 0.15	.X'	± 1'

Website:www.bsc-elec.com

Email:bestcreate@bsc-elec.com

DESIGN:

I. L

CHECKED:

C. W

APPROVED:

C. W

DATE:

2017. 3. 1

DATE:

2017. 3. 1

DATE:

2017. 3. 1

TITLE:

HDR15 FEMALE TO HDR15 FEMALE 5.08MM ATTACH SCREW TYPE

MATERILA:

FINSH:

PART NO:

DWG NO:

SIZE: A4

REV:

A


UNIT

mm

SCALE

1=1

QUALITY SYMBOLS



1

2

3

4

5

6

7

8