
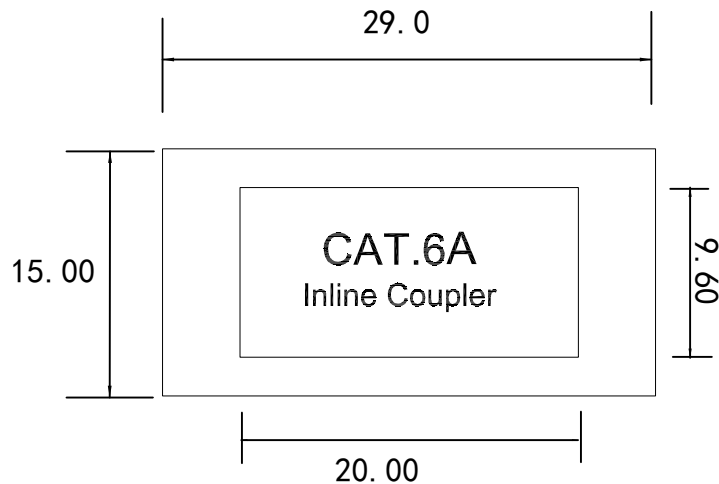
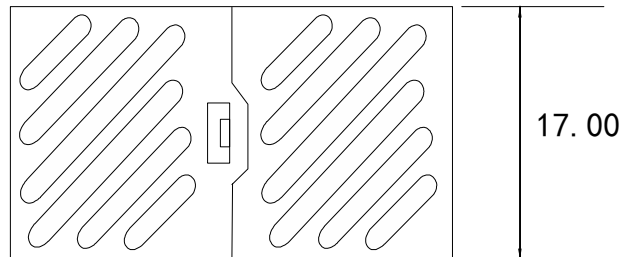


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN



**MATERIAL:**

HOUSING: PC,UL94V-0 .  
 TERMINAL: PHOSPHOR BRONZE T=0.35MM.  
 3U" GOLD PLATING ON CONTACT AREA.  
 SHIELD: C2680,T=0.20MM,20 MIN NICKEL PLATING  
 ON ALL AREA.

**MACHANICAL:**

DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.  
 OPERATING TEMPERATURE: -20 °C~+75°C.  
 STORAGE TEMPERATURE: -40°C~+85°C.  
 ALL CRITICAL DIMENSIONS WITH "\*"

**ELECTRICAL:**

VOLTAGE: 125 VOLTS AC.  
 CURRENT RATING :1.5AMP.  
 DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.  
 INSULATION RESISTANCE: 500 MEGA OHMS MIN @ 500V DC.  
 CONTACT RESISTANCE: 30 MILLIOHMS MAX.

**Bestcreate Technology Limited**

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.35	X'	±	3'
.X	±	0.30	.X'	±	2'
.XX	±	0.25	.XX'	±	1'

Website:www.bsc-elec.com  
 Email:bestcreate@bsc-elec.com

DESIGN: I. L. DATE: 2017. 3. 1

CHECKED: C. W. DATE: 2017. 3. 1

APPROVED: C. W. DATE: 2017. 3. 1

TITLE: RJ45 CAT. 6A UTP INLINE COUPLER ADAPTER, L=30MM

MATERILA: APUTP-S-5966-CAT-6A-30MM PART NO: APUTP-S-5966-CAT-6A-30MM SIZE: A4

FINSH: APUTP-S-5966-CAT-6A-30MM DWG NO:

REV: A UNIT mm SCALE 1=1 QUALITY SYMBOLS