

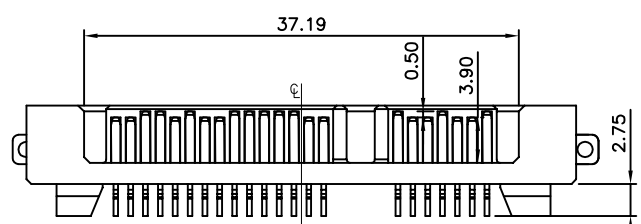
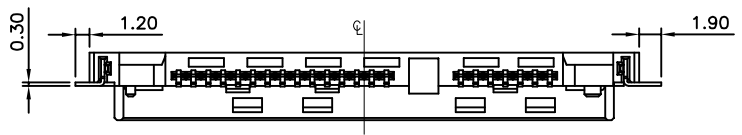

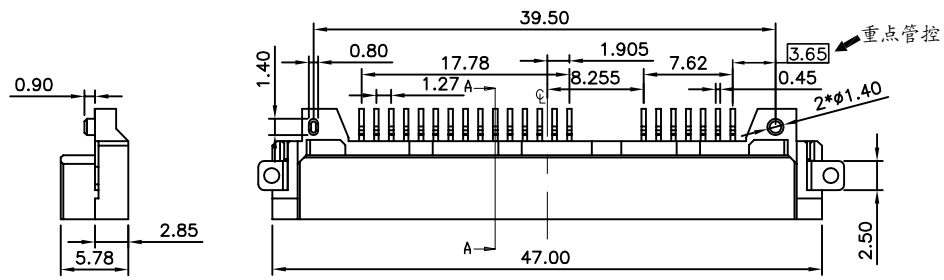
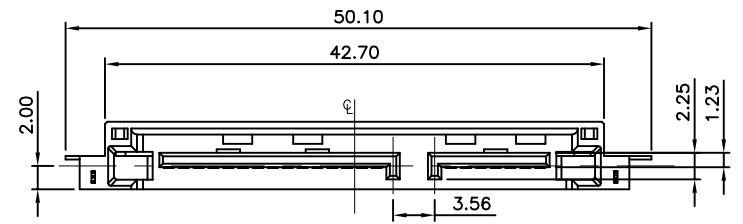


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

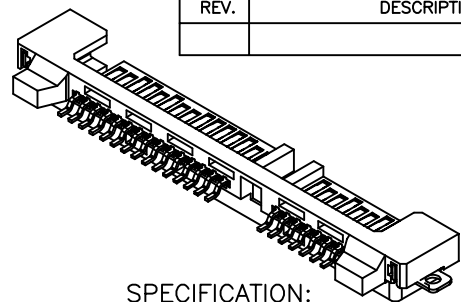

SPECIFICATION:
 1.MATERIAL:
 HOUSING:LCP UL 94V-0, COLOR:BLACK
 CONTACT:BRASS C2680R-H,T=0.25mm
 PEG: BRASS C2680R-H,T=0.30mm
 2.FINISH:
 CONTACT:1u"3u"5u"15u" GOLD/TIN PLATING ON CONTACT AREA
 100u" MIN. TIN PLATING ON SOLDERTAILS
 50u" MIN.NICKEL UNDERPLATING OVER ALL
 PEG:100u" MIN. TIN PLATING ON SOLDERTAILS
 50u" MIN.NICKEL UNDERPLATING OVER ALL

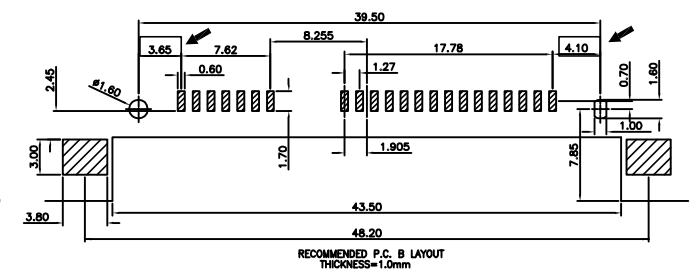

PART NO. INFORMATION
S715 - M X A 5 T -007

GENDER
 F: FEMALE M: MALE
 HOUSING COLOR
 5: BLACK
 HOUSING MATERIAL A: LCP
 CONTACT PLATED
 1: GOLD FLASH/TIN
 2: 15U" GOLD/TIN
 3: 30U" GOLD/TIN

NO.	DESCRIPTION	MATERIAL	COLOR	REMARK
3	Peg	BRASS C2680R-H		Ni/Tin Plated
2	Terminal	BRASS C2680R-H		Gold/Tin Plated
1	Housing	High Temp	Black	UL 94V-0

<h1>Bestcreate Technology Limited</h1>				TOLERANCES UNLESS OTHERWISE SPECIFIED:		DESIGN: I.L		DATE: 2017.3.1		TITLE: SATA 7+15P MALE CONNECTOR FOR 1.0MM PCB	
				X. ± 0.35	X.* ± 3*	CHECKED: C.W		DATE: 2017.3.1		MATERILA:	
REV: A	UNIT: mm	SCALE: 1=1	QUALITY SYMBOLS	Website: www.bsc-elec.com		APPROVED: C.W		DATE: 2017.3.1		FINSH:	
				E-mail: bestcreate@bsc-elec.com						DWG NO: S715-MXA5T-007	
										SIZE: A4	
										SHEET: 1 OF 2	