
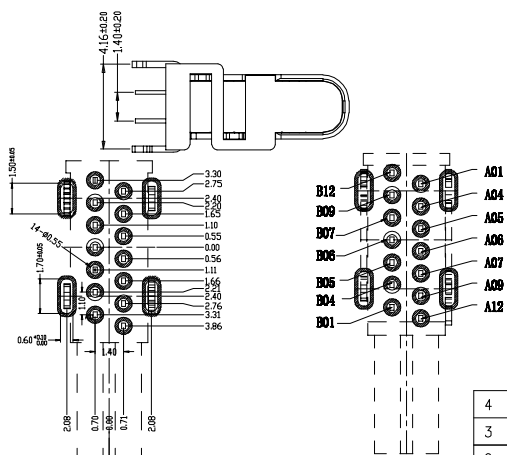
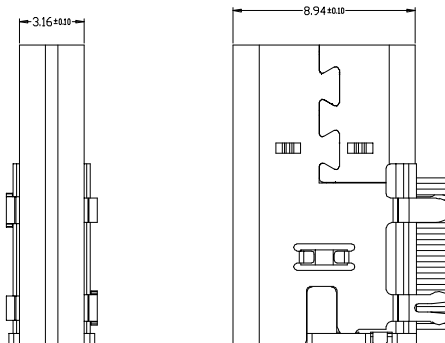




RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN



A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1		
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A9	VBUS	B5	CC2
A12	GND	B4	VBUS
		B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

产品要求:

- 壳子: a. 不锈钢201 T:0.30mm
b. 电镀镍
- 端子: a. (C1814)/铜 T:0.20mm
b. 电镀半金锡(3u")
- 卡勾: a. 不锈钢301 T: 0.30mm

4. 塑胶: LCP (E130I)

5. MECHANICAL:

INSERTION: 5~20N.

EXTRACTION: 8~20N.

DURABILITY: 10000 CYCLES

6. ELECTRICAL:

CURRENT: 5A MIN FOR VBUS;
0.25A MIN FOR OTHER.

VOLTAGE: 5VAC MAX


WITHSTANDING VOLTAGE: 100V AC.

CONTACT RESISTANCE: 40mΩ MAX.

INSULATION RESISTANCE: 100MΩ MIN.

PART NO. INFORMATION

U06-C F 1 X 5 R - 039

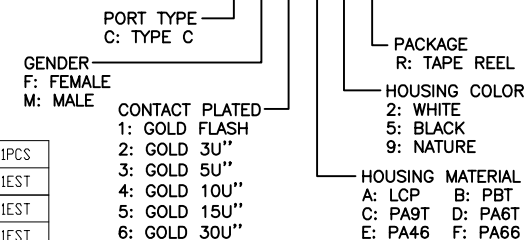

4	外壳	不锈钢	镀镍	1PCS
3	端子	高导电铜 (C1814)	半金锡 (3u")	1EST
2	塑胶主体	LCP (E130I)	黑色	1EST
1	卡勾	不锈钢	—	1EST
NO.	DESCRIPTION	MAT/PIAL	PRM/PYS	QTY

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.50	X.*	± 2'
.X	± 0.10	.X*	± 1'
.XX	± 0.05		

Website: www.bsc-elec.com
E-mail: bestcreate@bsc-elec.com

DESIGN: I. L DATE: 2017. 3. 1

CHECKED: C. W DATE: 2017. 3. 1

APPROVED: C. W DATE: 2017. 3. 1

TITLE: USB 3.1 C FEMALE 14P SIDE ENTRY

MATERILA:	PART NO: U06-CF1X5R-039	SIZE: A4
FINSH:	DWG NO: U06-CF1X5R-039	SHEET: 1 OF 1

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------