
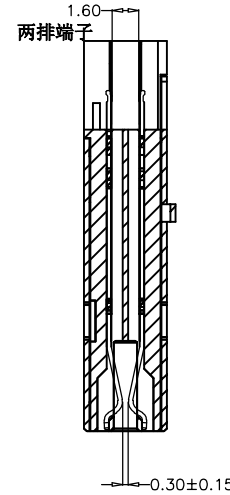
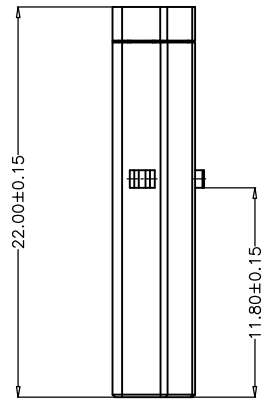




RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

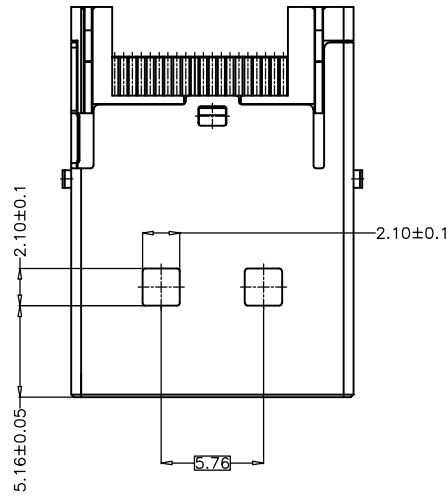

SECTION A-A

- 规格:
1. 插入力: 44.1N MAX. (不含卡钩)
 2. 拔出力: 9.8N~39.2N (不含卡钩)
 3. 耐久性: 1500 CYCLES . AT100±50 CYCLES PER HOUR
 4. 额定电流: 0.5A MIN
 5. 额定电压: 40V MAX
 6. 耐电压: 300V AC MIN.
 7. 接触阻抗: 50mΩ MAX. 壳体100mΩ MAX
 8. 绝缘电阻: 10MΩ MIN
 9. 工作温度: -20℃ TO 40℃
 10. 所用材质须符合RoHS要求

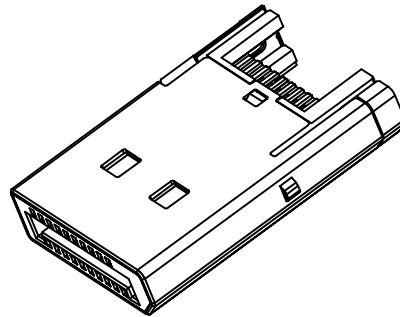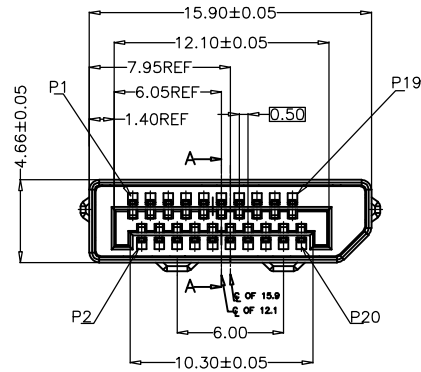

PART NO. INFORMATION

DP09- M X X X X - 002

- GENDER: F: FEMALE, M: MALE
- CONTACT PLATED: 1: GOLD FLASH, 2: GOLD 3U'', 3: GOLD 5U'', 4: GOLD 10U'', 5: GOLD 15U'', 6: GOLD 30U''
- PACKAGE: R: TAPE REEL, T: TRAY
- HOUSING COLOR: 2: WHITE, 5: BLACK, 9: NATURE
- HOUSING MATERIAL: A: LCP, B: PBT, C: PA9T, D: PA6T, E: PA46, F: PA66

零件	数量	材料规格
④ 卡钩	2PCS	SUS301 T=0.40±0.02
⑤ 胶芯	1PCS	LCP (黑色)
② 壳体	1PCS	spec, T=0.30±0.02, 镀镍30u''
① 端子	20PCS	COPPER ALLOY, T=0.25±0.02 AU/SN 50u''

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.35	X.*	± 3"
.XX	± 0.25	.X.*	± 2"
.XXX	± 0.15	.XX.*	± 1"

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com

DESIGN: I. L
DATE: 2017. 3. 1
CHECKED: C. W
DATE: 2017. 3. 1
APPROVED: C. W
DATE: 2017. 3. 1

TITLE: STRADDLE MOUNT DP 20P MALE CONNECTOR

MATERILA: FINSH:
PART NO: DP09-MXXXX-002
SIZE: A4
DWG NO: DP09-MXXXX-002

REV: A
UNIT: mm
SCALE: 1=1
QUALITY SYMBOLS