


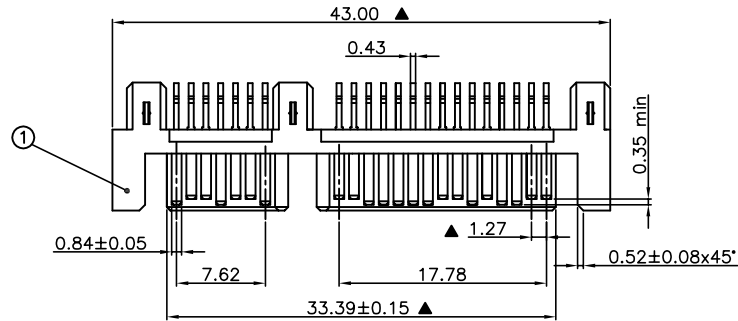
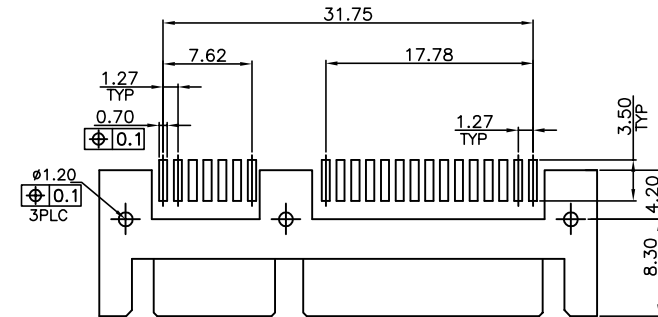


RoHS Compliant


REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN



SPECIFICATION:
 1.MATERIAL:
 HOUSING:LCP LG431-9731L 30% G/F UL 94V-0
 COLOR:BLACK
 CONTACT:BRASS C2680R-H,T=0.25mm
 PEG: BRASS C2680R-H,T=0.30mm
 2.FINISH:
 CONTACT:1u" GOLD/TIN PLATING ON CONTACT AREA
 100u" MIN. TIN PLATING ON SOLDERTAILS
 50u" MIN.NICKEL UNDERPLATING OVER ALL

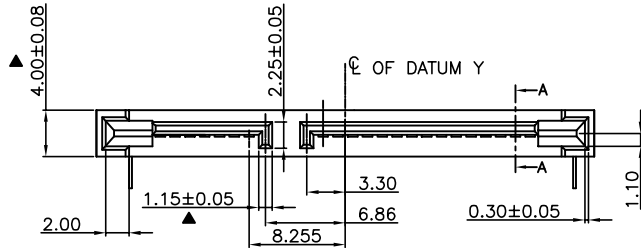

PCB LAYOUT
 RECOMMENDED PCB TOLERANCE:±0.05

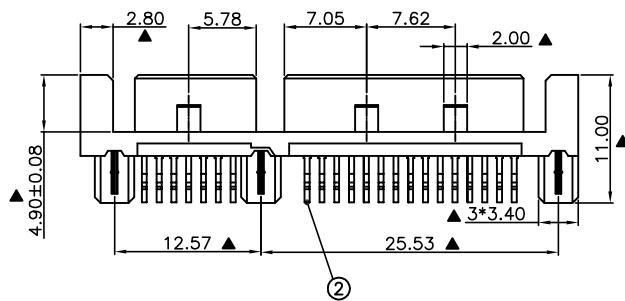

PART NO. INFORMATION

S715 - M X A 5 T -008

GENDER
 F: FEMALE M: MALE

CONTACT PLATED
 1: GOLD FLASH/TIN
 2: 15U" GOLD/TIN
 3: 30U" GOLD/TIN

PACKAGE
 T: TRAY
 R:TAPE REEL
 HOUSING COLOR
 5: BLACK
 HOUSING MATERIAL A: LCP

3	Board lock	Brass C2680		Gold/Ni Plated
2	Terminal	Brass C2680		Gold/Tin Plated
1	Housing	High Temp	Black	UL 94V-0
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.35	X.*	± 3*
.X	± 0.25	.X*	± 2*
.XX	± 0.15	.XX*	± 1*

DESIGN: I. L DATE: 2017. 3. 1

CHECKED: C. W DATE: 2017. 3. 1

APPROVED: C. W DATE: 2017. 3. 1

TITLE: SATA 7+15P MALE CONNECTOR SMT TYPE

MATERILA:	PART NO: S715-MXA5T-008	SIZE: A4
FINSH:	DWC NO: S715-MXA5T-008	SHEET: 1 OF 2

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------

Website: www.bsc-elec.com
 E-mail: bestcreate@bsc-elec.com