

RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN


Specifications

Current Rating: 7.0Amp  
 Insulation Resistance: 100MΩ Min.  
 Dielectric Withstanding: 500V AC  
 Contact Resistance: 30MΩ Max.  
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze  
 Insulation Material: Polyester, UL 94V-0  
 Nylon 9T  
 All materials must be ROHS materials





Recommended P.C.Board  
 Hole Layout  
 (Tolerance: ±0.05)

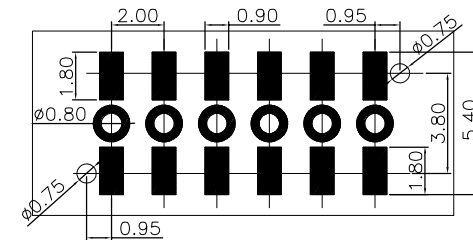

PART NO. INFORMATION

**BH200-XX M X C 5 T - 001**

NO.OF PINS PER ROW: 03-08  
 GENDER: F: FEMALE, M: MALE  
 CONTACT PLATED: 1:TIN, 2: GOLD FLASH  
 PACKAGE: T: TUBE  
 HOUSING COLOR: 5: BLACK  
 HOUSING MATERIAL: C: PA9T

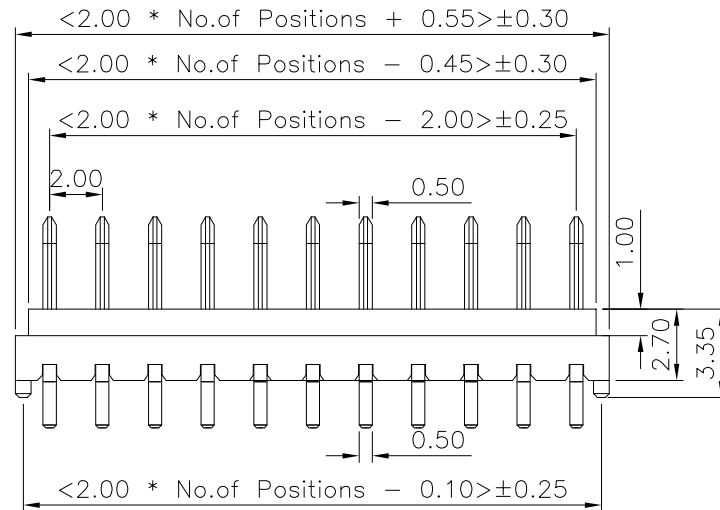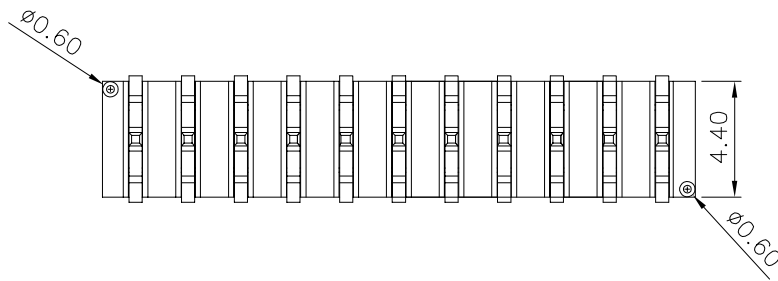

**Bestcreate Technology Limited**

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.30	X'	± 5'
.X	± 0.25	.X'	± 3'
.XX	± 0.15	.XX'	± 2'

Website: www.bsc-elec.com  
 Email: bestcreate@bsc-elec.com

DESIGN: I. L DATE: 2017. 3. 1  
 CHECKED: C. W DATE: 2017. 3. 1  
 APPROVED: C. W DATE: 2017. 3. 1

TITLE: 2.0MM BATTERY HOLDER MALE DIP TYPE  
 MATERILA: FINSH:  
 PART NO: BH200-XXMXC5T-001  
 DWG NO: BH200-XXMXC5T-001  
 SIZE: A4

REV: A UNIT mm SCALE 1=1 QUALITY SYMBOLS