
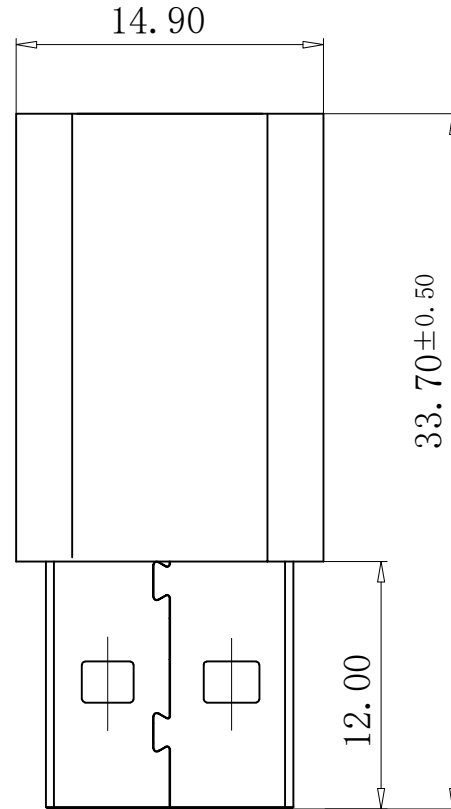
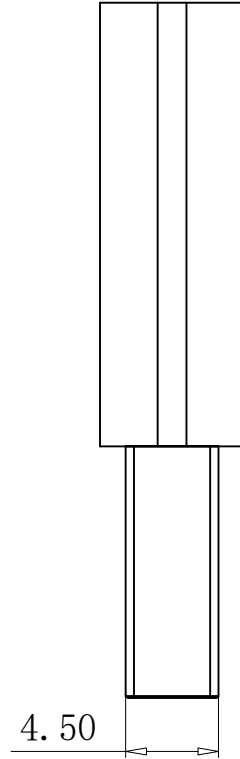
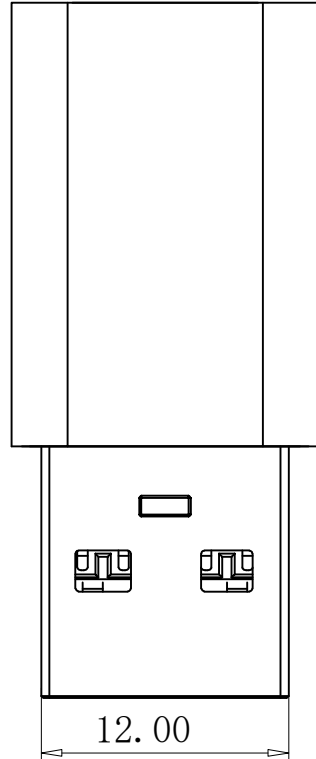


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

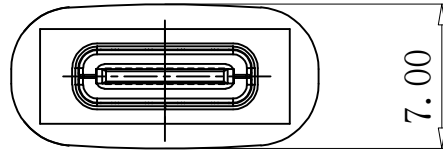

- NOTE:
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 80mΩ Max
 - CONTACT CURRENT RATING: 1.5 A
 - DIELECTRIC WITHSTANDING VOLTAGE: 100 V R.M.S.
 - INSULATION RESISTANCE 100 MEGOHMS Min
 - OPERATING TEMPERATURE: -25° C ~ 75° C
 - MECHANICAL CHARACTERISTICS:
 - MATING FORCE: USB CF 5~20N & USB3.0 AM 35N Max.
 - UNMATED FORCE: USB CF 8~20N & USB3.0 AM 10N Min.
 - PLATING
 - TERMINAL CONTACT: (SEE TAB) GOLD PLATING ALL OVER 50u"MIN NICKEL
 - SHELL: 50u"MIN. NICKEL ALL OVER

Item	Name	Part Number	Description	Q'TY
3	Shell		Aluminum shell gold	1PCS
2	PVC		PVC 45P,COLOR: WHITE&Black	0.005KG
1	PCBA		USB3.0 AM TO TYPE CF R1:56k R2:56k,DIAN GAN nickel plated	1PCS

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.50	X.'	± 5'
.X	± 0.40	.X'	± 2'
.XX	± 0.30	.XX'	± 1'

Website: www.bsc-elec.com
 Email: bestcreate@bsc-elec.com

DESIGN: I.L
 DATE: 2017.3.1
 CHECKED: C.W
 DATE: 2017.3.1
 APPROVED: C.W
 DATE: 2017.3.1

TITLE: USB 3.1 CF TO USB 3.0 AM ADAPTER, L=33.7MM
 MATERILA: FINISH:
 PART NO: ADUCFTU30AM-079
 DWG NO: ADUCFTU30AM-079
 SIZE: A4

REV: A
 UNIT: mm
 SCALE: 1=1
 QUALITY SYMBOLS

