



RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

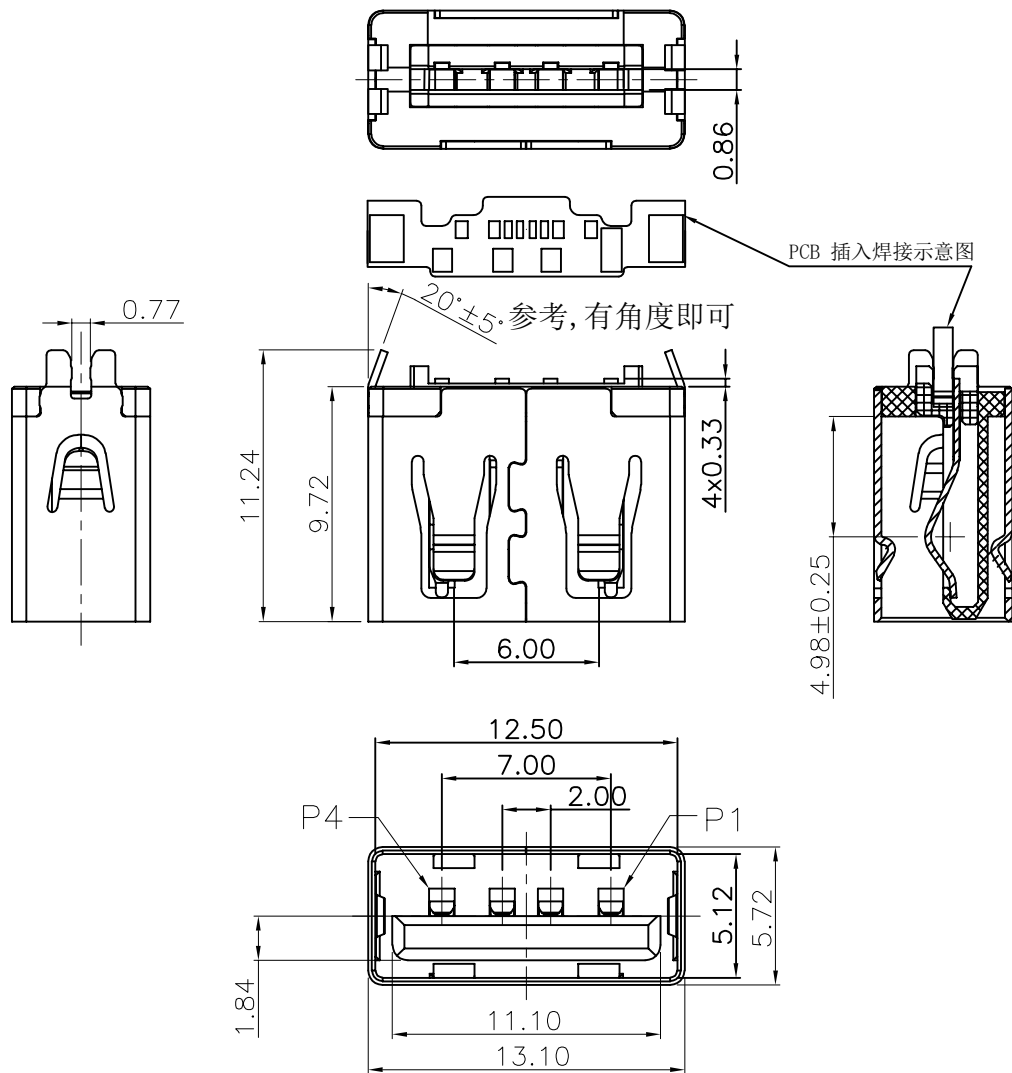

注: 1.初次插入力: 25N Max 拔出力: 10-25N ,
 耐久1500次后 拔出力: 10-25N ,
 2.盐雾测试: 48H/要求是喷8H, 停16H, 喷8H, 停16H
 3, 绝缘测试: DC300V 10MΩ
 材料: 端子: C5191-H, 电镀G/F
 胶芯: LCP 30%GF 黑色
 外壳: SPCC 电镀镍

PART NO. INFORMATION

U04-A F X X X T - 028

PORT TYPE
A: TYPE A

GENDER
F: FEMALE
M: MALE

CONTACT PLATED
1: GOLD FLASH
2: GOLD 3U"
3: GOLD 5U"
4: GOLD 10U"
5: GOLD 15U"
6: GOLD 30U"

PACKAGE
T: TRAY

HOUSING COLOR
1: RED 5: BLACK
2: WHITE
3: GREEN
9: NATURE

HOUSING MATERIAL
A: LCP B: PBT
C: PA9T D: PA6T
E: PA46 F: PA66

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.50	X.'	± 3'
.X	± 0.30	.X"	± 2"
.XX	± 0.20	.XX"	± 1"

Website: www.bsc-elec.com
 E-mail: bestcreate@bsc-elec.com

DESIGN: I.L DATE: 2017.3.1

CHECKED: C.W DATE: 2017.3.1

APPROVED: C.W DATE: 2017.3.1

TITLE: USB 2.0 A/F CONNECTOR FOR 0.8MM
 PCB DIP TYPE, L=9.72MM

MATERILA: PART NO: U04-AFXXXT-028 SIZE: A4

FINSH: DWG NO: U04-AFXXXT-028 SHEET: 1 OF 1

REV: A UNIT mm SCALE 1=1

QUALITY SYMBOLS