


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

COLOR	PLATING
BLACK	NICKEL
SLIVER	NICKEL
GOLD	NICKEL
GRAY	NICKEL
RED	NICKEL

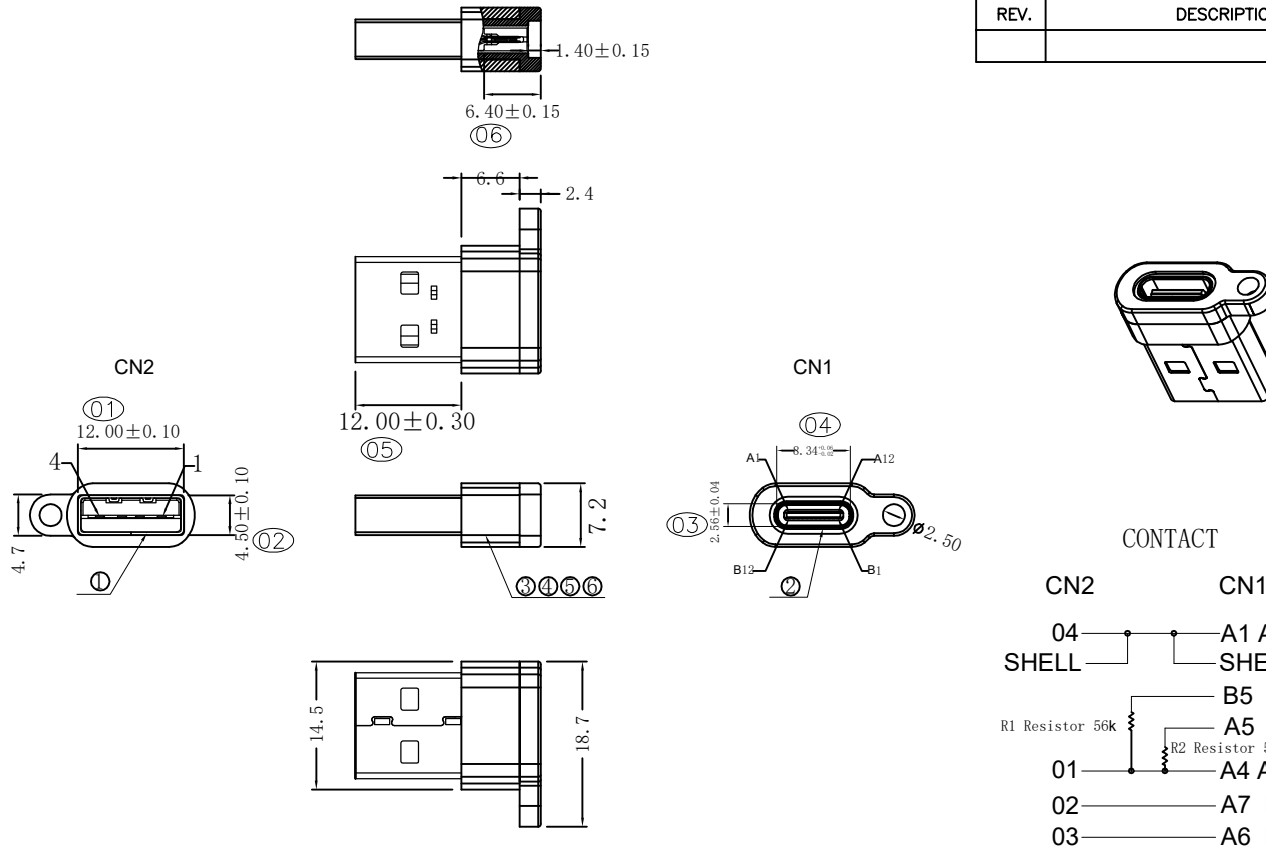

NOTES:

- 1.100% open short test condition;
2. Conductor Resistance $\leq 5 \Omega$, insulation resistance $\geq 10M \Omega$.
High voltage test, DC 300V/10mS.
3. Support Power Charging , Data Transfer.
4. PCB Board Connection.

6	RESISTANCE	Resistor56K 0402	5.15.02	2PCS
5	SHELL	Aluminium Alloy SHELL BLACK	5.10.270-1	2.3G
4	Internal Mold	PVC 45P BLACK	5.09.02-1	1.0G
3	In-Connection	PCB T=0.80MM		1PCS
2	Connector	USB TYPE CF SHELL NICKEL PLATED PIN G/F	18.02.06.030	1PCS
1	Connector	USB 2.0 AM SHELL NICKEL PLATED PIN G/F		1PCS
NO	NAME	MATERIAL	NO	QTY

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.50	X.*	± 5'
.X	± 0.30	.X*	± 2'
.XX	± 0.10	.XX*	± 1'

DESIGN: I. L DATE: 2017.3.1

CHECKED: C. W DATE: 2017.3.1

APPROVED: C. W DATE: 2017.3.1

TITLE: USB2.0 AM TO TYPE CF 180°

MATERILA: PART NO: AD20AMCF-013 SIZE: A4

FINSH: DWG NO: AD20AMCF-013

REV: A UNIT mm SCALE 1=1 QUALITY SYMBOLS

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com