

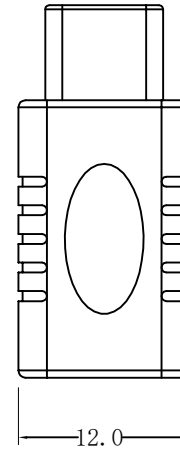
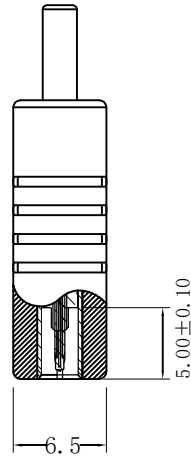
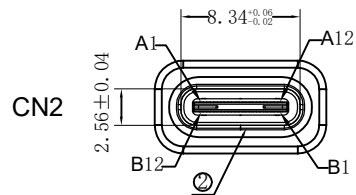
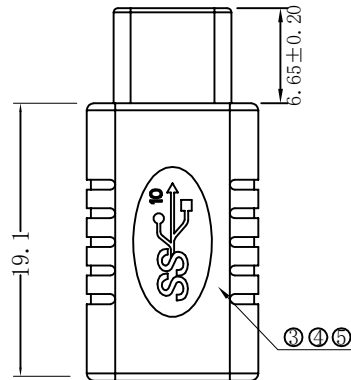


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

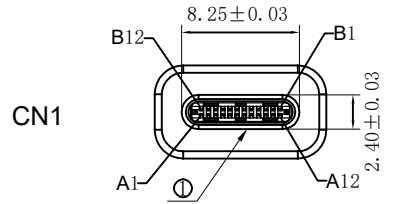

CONTACT

CN1	CN2	CN1	CN2
A1	A1	B1	B1
A2	A2	B2	B2
A3	A3	B3	B3
A4	A4	B4	B4
A5	A5	B5	B5
A6	A6	B6	B6
A7	A7	B7	B7
A8	A8	B8	B8
A9	A9	B9	B9
A10	A10	B10	B10
A11	A11	B11	B11
A12	A12	B12	B12

SHELL — SHELL

NOTES:

- 100% open short test condition;
- Conductor Resistance $\leq 5\Omega$, insulation resistance $\geq 10M\Omega$.
High voltage test, DC 300V/10mS.
- Support Power Charging , Data Transfer.
- PCB Board Connection.
- ROHS APPROVED.

5	Outer Mold	PVC 45P BLACK	5.09.02-1	2.1G
4	Internal Mold	PE SIZING MATERIAL TRANSPARENCY	5.09.01-0	1.5G
3	In-Connection	PCB T=0.8MM	5.12.276	1PCS
2	CONNECTOR	USB TYPE CF 9.3 SHELL NICKEL PLATED PIN G/F	5.03.57	1PCS
1	CONNECTOR	USB TYPE CM SHELL PEARL NICKEL PLATED PIN G/F	5.03.64	1PCS
NO	NAME	MATERIAL	NO	QTY

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.50	X.*	± 5'
.X	± 0.30	.X*	± 2'
.XX	± 0.10	.XX*	± 1'

DESIGN: I. L DATE: 2017.3.1

CHECKED: C. W DATE: 2017.3.1

APPROVED: C. W DATE: 2017.3.1

TITLE: USB3.1 TYPE CM TO CF 180°

MATERILA: PART NO: AD31CMCF-009 SIZE: A4

FINSH: DWG NO: AD31CMCF-009

REV: A UNIT mm SCALE 1=1 QUALITY SYMBOLS

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com