



RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

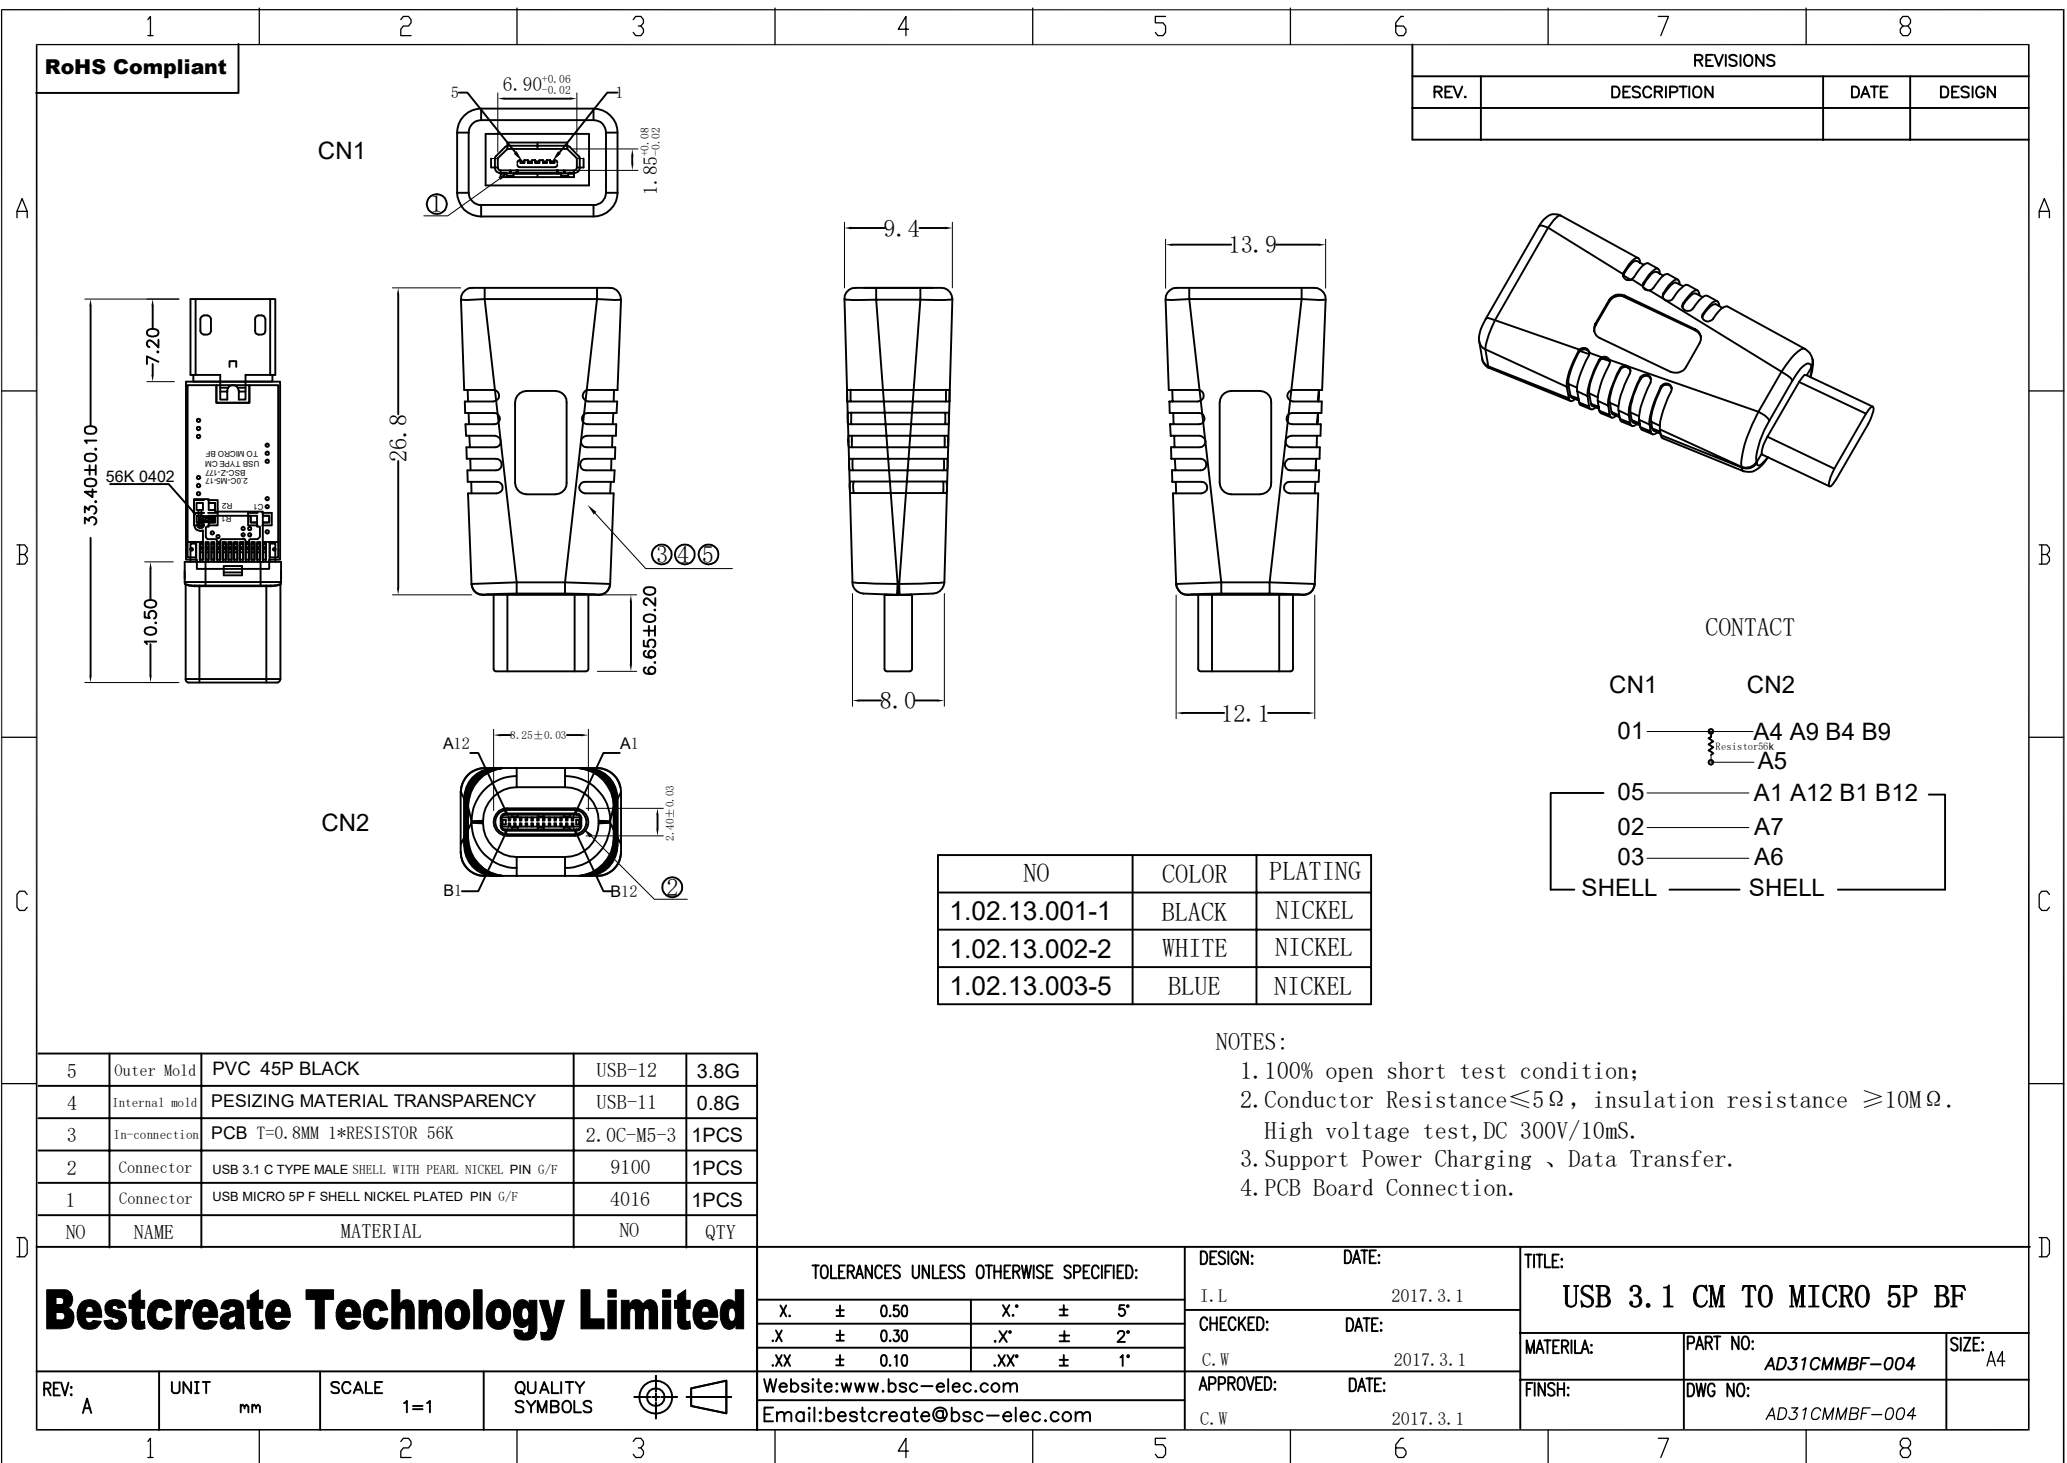

CONTACT

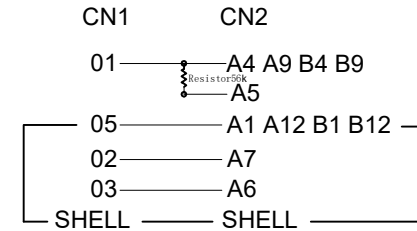

NO	COLOR	PLATING
1.02.13.001-1	BLACK	NICKEL
1.02.13.002-2	WHITE	NICKEL
1.02.13.003-5	BLUE	NICKEL

- NOTES:
- 100% open short test condition;
 - Conductor Resistance $\leq 5\Omega$, insulation resistance $\geq 10M\Omega$.
High voltage test, DC 300V/10mS.
 - Support Power Charging、Data Transfer.
 - PCB Board Connection.

5	Outer Mold	PVC 45P BLACK	USB-12	3.8G
4	Internal mold	PESIZING MATERIAL TRANSPARENCY	USB-11	0.8G
3	In-connection	PCB T=0.8MM 1*RESISTOR 56K	2.0C-M5-3	1PCS
2	Connector	USB 3.1 C TYPE MALE SHELL WITH PEARL NICKEL PIN G/F	9100	1PCS
1	Connector	USB MICRO 5P F SHELL NICKEL PLATED PIN G/F	4016	1PCS
NO	NAME	MATERIAL	NO	QTY

Bestcreate Technology Limited			TOLERANCES UNLESS OTHERWISE SPECIFIED:		DESIGN: I. L	DATE: 2017.3.1	TITLE: USB 3.1 CM TO MICRO 5P BF	
			X. ± 0.50	X.* ± 5'	CHECKED: C. W	DATE: 2017.3.1	MATERIAL: FINISH:	PART NO: AD31CMMBF-004
REV: A	UNIT: mm	SCALE: 1=1	QUALITY SYMBOLS	Website: www.bsc-elec.com	APPROVED: C. W	DATE: 2017.3.1	DWG NO: AD31CMMBF-004	