
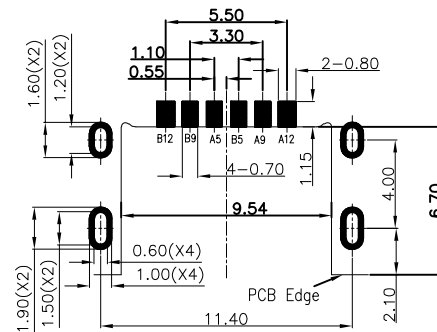



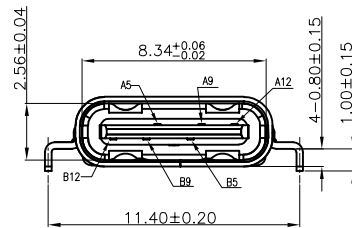



RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

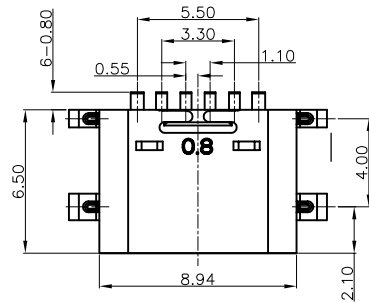

RECOMMENDED P.C.B. LAYOUT  
TOLERANCE UNSPECIFIED ±0.05mm

SPECIFICATION:

1. Material:

HOUSING&MOLDING:HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V-0 BLACK,  
CONTACTS:COPPER ALLOY T=0.20 PLATED:AU/SN  
SHELL:SUS201,T=0.30 PLATED:50U" Ni

2. Mechanical:

- 2.1.Mating force:5~20Nf ;
- 2.2.Unmating force:6~20Nf ;
- 2.3.Durability:3000 Cycles;

3. Electrical:

- 3.1.Current Rating:3A Max. ;
- 3.2.Voltage Rating:20V Max. ;
- 3.3.Dielectric Withstanding volage:100Vac;
- 3.4.Contact resistance:40m Ohms Max. ;
- 3.5.Insulation Resistance:100M Ohms Min. ;


4. Environmental:

- 4.1.Operating temperature:-40° C~+85° C;
- 4.2.Wetting Temperature:265±5° C, 5±0.5s

5.PART NUMBER CODE:

1	U06-CF1A5R-072	LCP黑色半金錫1u"	TAPE & REEL
序号	PART NO.	REMARKS	PACKING

PART NO. INFORMATION

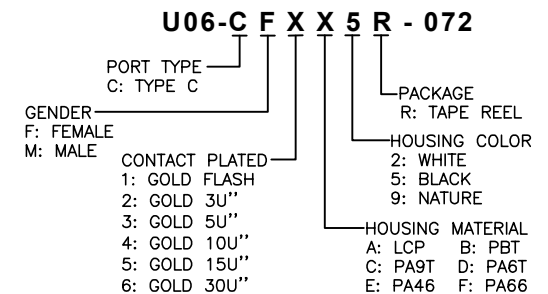

**Bestcreate Technology Limited**

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.30	X.'	±	5°
.X	±	0.25	.X'	±	2°
.XX	±	0.10	.XX'	±	1°

DESIGN:  
I. L

DATE:

TITLE:

MID MOUNT 0.8MM USB TYPE C 6PIN FEMALE  
CONNECTOR 24P, L=6.5MM

CHECKED:

DATE:

MATERILA:

PART NO:

U06-CFXX5R-072

SIZE:  
A4

Website:www.bsc-elec.com

APPROVED:

DATE:

FINSH:

DWG NO:

U06-CFXX5R-072

Email:bestcreate@bsc-elec.com

REV: A

UNIT mm

SCALE 1=1

QUALITY SYMBOLS

