


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

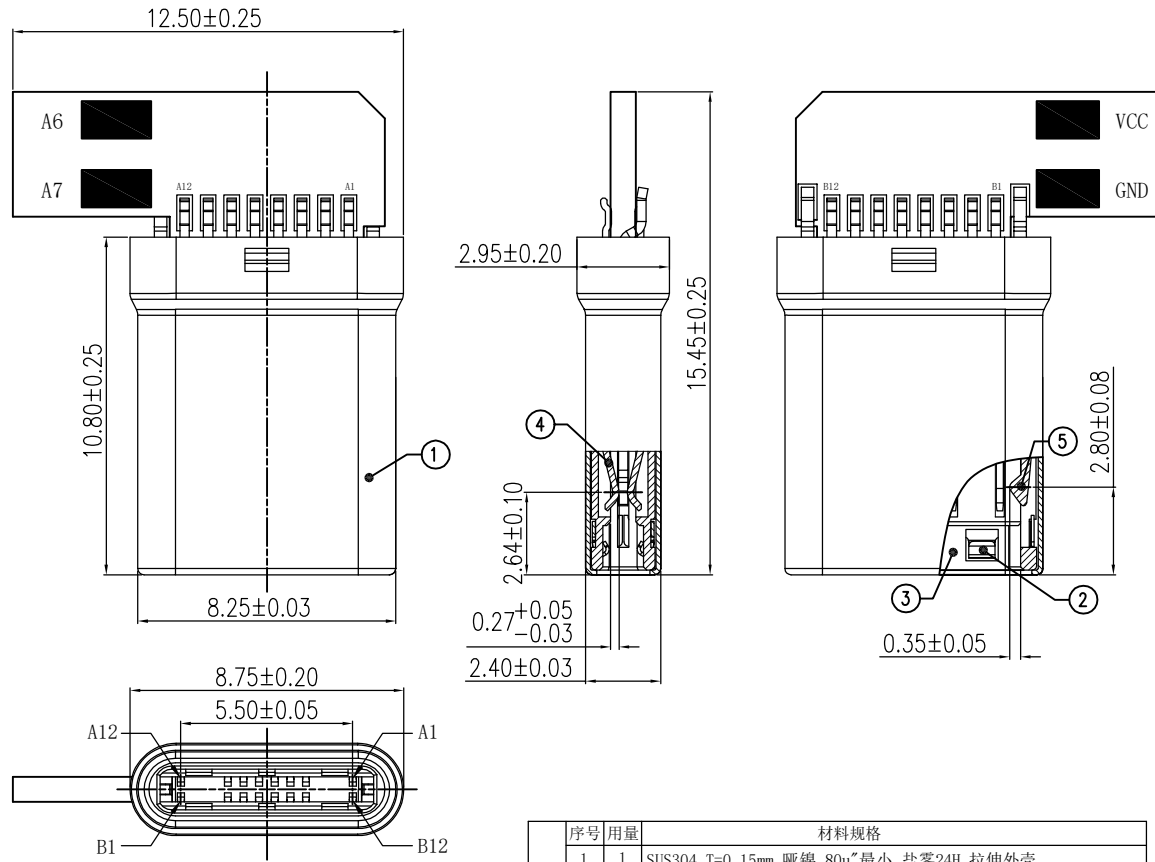


USB TYPE C 接线示意图

PIN A4、A9、B4、B9	VCC
PIN A5 (CC)	
PIN A1、A12、B1、B12、SHELL	GND
PIN A6	D+
PIN A7	D-
R=56K 5%	

- NOTES:
- MECHANICAL:
    - MATING FORCE: 5-20N .
    - UNMATING FORCE: 8-20N .
    - DURABILITY: 10000 CYCLES MIN.
  - ELECTRICAL:
    - CURRENT: 5.0A MAX
    - VOLTAGE: 20V MAX
    - WITHSTANDING VOLTAGE: 100V AC
    - CONTACT RESISTANCE:
      - 40 mΩ MAX INITIAL;
      - 50 mΩ MAX AFTER 10000 CYCLES
  - ENVIRONMENTAL
    - OPERATING TEMPERATURE RANGE
    - 30°C ~ +80°C

PART NO. INFORMATION

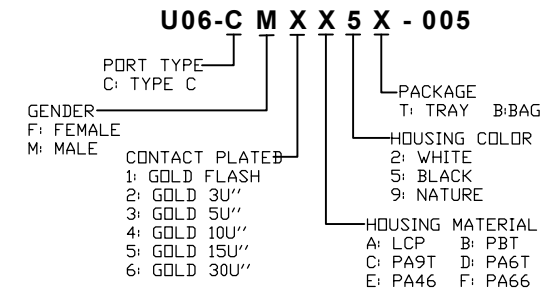

序号	用量	材料规格
1	1	SUS304 T=0.15mm 哑镍 80u"最小 盐雾24H 拉伸外壳
2	2	SUS301 T=0.10mm EMI
3	1	LCP+30%G.F 黑色 护套
4	2	LCP+30%G.F 黑色 C2680 Au 1u"; Ni 50u"; Sn 100u"Min Molding
5	1	SUS301 T=0.30mm Sn 100u"min 盐雾24H 卡勾
6	1	FR-4 PCB线路板 绿油 T=0.8mm

**Bestcreate Technology Limited**

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.25	X.*	± 5°
.X	± 0.20	.X*	± 3°
.XX	± 0.15	.XX*	± 1°

Website: www.bsc-elec.com  
Email: bestcreate@bsc-elec.com

DESIGN: I. L DATE:

CHECKED: C. W DATE:

APPROVED: C. W DATE:

TITLE: TYPE C 16PIN拉伸哑镍

MATERIAL:	PART NO: U06-CMXX5X-005	SIZE: A4
FINSH:	DWG NO: U06-CMXX5X-005	

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------