

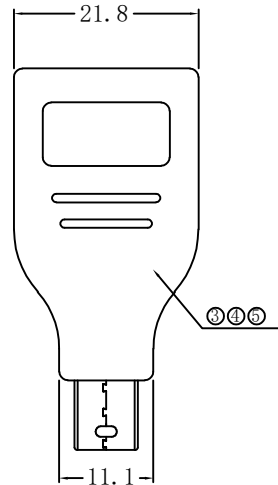




RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

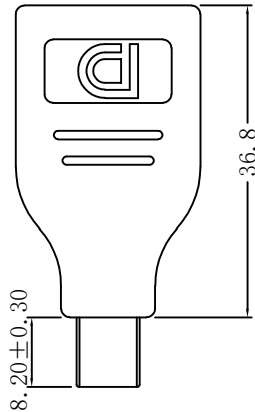

### 接点表

CN1	CN2	CN1	CN2
02	01	18	02
01	03	13	04
03	05	14	06
05	07	11	08
04	09	10	10
06	11	12	12
08	13	16	14
07	15	15	16
09	17	17	18
19	19	20	20
		SHELL	SHELL

注:

- 100%短/断路&错线测试条件;
- 导通阻抗 $\leq 5\Omega$ , 绝缘阻抗 $\geq 10M\Omega$ . 高压测试, DC 300V/10mS.
- 产品采用PCB板连接, 地线电子线连接.
- 所用材质须符合ROHS要求.

序号	名称	材料	物料编号	用量
6	外模	PVC胶料 45P 黑色	5.09.02-1	5.2G
5	内模	PE胶料 透明	5.09.01-0	1.6G
4	内连接	电子线7*0.14/OD1.0MM 30# L=25MM	5.14.01	1PCS
3	内连接	PCB板 T=1.6MM	5.12.012	1PCS
2	连接器	MINI DP M 壳体镀金&镀镍 PIN针镀金G/F 铁金: 5.04.21 铁镍: 5.04.22		1PCS
1	连接器	DP 20P F 壳体镀金&镀镍 PIN针镀金G/F 铁金: 5.04.01 铁镍: 5.04.02		1PCS

# Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.50	X'	± 5'
.X	± 0.30	.X'	± 2'
.XX	± 0.10	.XX'	± 1'

DESIGN: I. L DATE: 2017. 3. 1

CHECKED: C. W DATE: 2017. 3. 1

APPROVED: C. W DATE: 2017. 3. 1

TITLE: DP 20P FEMALE TO MINI DP MALE ADAPTER 180°

MATERILA: PART NO: DPFTOMIM-005 SIZE: A4

FINSH: DWG NO: DPFTOMIM-005

REV: A UNIT mm SCALE 1=1 QUALITY SYMBOLS

Website: www.bsc-elec.com  
Email: bestcreate@bsc-elec.com