
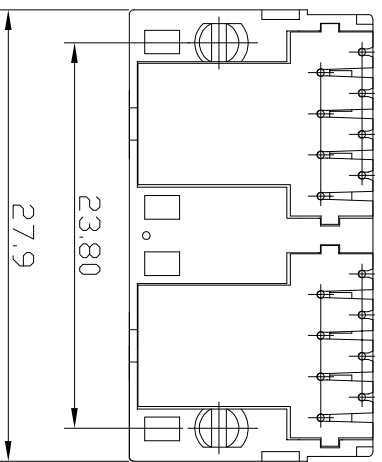
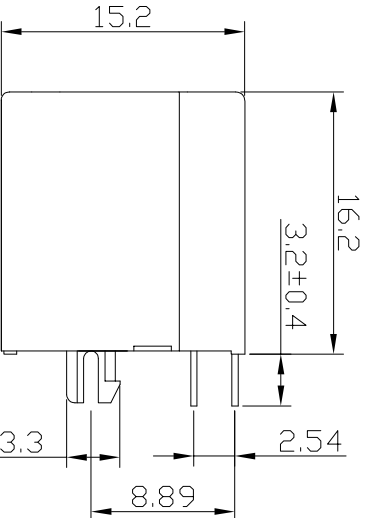


RoHS Compliant

REVISIONS		
REV.	DESCRIPTION	DATE

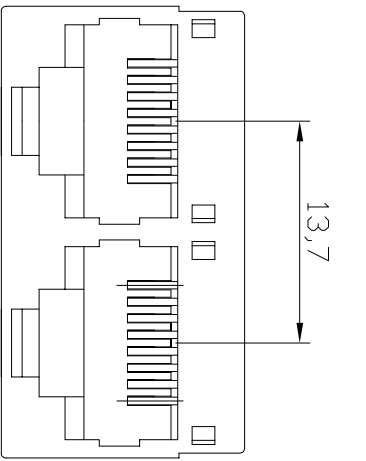


NOTES

- MATERIAL.**
 1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
 2. CONTACT MATERIAL : PHOSPHOR BRONZE ϕ 0.46mm.
 3. PLATING : GOLD FLASH PLATING OVER NICKEL.

- ELECTRICAL.**
 1. VOLTAGE RATING : 125 VAC RMS.
 2. CURRENT RATING : 1.5 AMP.
 3. CONTACT RESISTANCE : 40 MILLIOHMS MAX.
 4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 100V DC.
 5. DIELECTRIC DIELECTRIC RESISTANCE : 500V DC RMS 50Hz. 1MIN.

- MECHANICAL.**
 1. DURABILITY : 750 CYCLES MIN.
 2. MATING/UNMATING FORCE : 2.04 KG. F MAX.
- ENVIRONMENTAL:**
 1. STORAGE : -40°C~+85°C.
 2. OPERATION : 0° C TO 70° C.

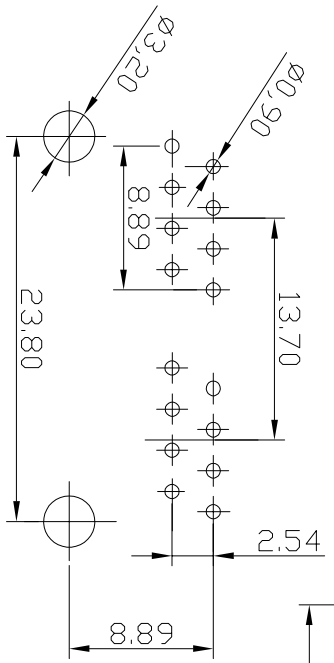

PCBLAYOUT
TOL:±0.05

PART NO. INFORMATION

RJ01 - X 5 X X - 092

- CONTACT PLATED**
 1: G/P
 3: AU 6U"
- HOUSING:**
 1.PBT BLACK
 2.PBT YELLOW
 3.PBT GRAY
- PACKAGE**
 R: TAPE
 T: TRAY

Bestcreate Technology Limited

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS					
1	2	3	4	5	6	7	8	

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X	± 0.35	X'	±	3'
.XX	± 0.25	.X'	±	2'
.XXX	± 0.15	.XX'	±	1'

DESIGN: 1. L DATE: 2017. 3. 1

CHECKED: C. W DATE: 2017. 3. 1

APPROVED: C. W DATE: 2017. 3. 1

TITLE: RJ45 8P8C 52 1x2 VERTICAL DIP TYPE

MATERIAL: PART NO: RJ01 - X5XX - 092

FINSH: DWG NO: RJ01 - X5XX - 092

SIZE: A4