



RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

NOTE:  
 1. MATERIALS AND FINISHED  
 INSULATOR: PBT+30% GF UL 94V-0,  
 SHELL: STEEL, NI OR SN FINISHED  
 CONTACT MATERIAL: BRASS, SELEVITE GOLD FINISHED  
 RIVETED INSERT: BRASS MATERIAL, TIN FINISHED  
 WITH #4-40 THREADED ASSEMBLED  
 2. ELECTRICAL CHARACTERISTICS  
 CURRENT RATING: 3.0 AMP DC  
 VOLTAGE RATING: 250 V DC  
 CONTACT RESISTANCE: 30 MILLIOHMS MAX.  
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC MIN.  
 INSULATION RESISTANCE: 1000 MEGAOHMS MIN.  
 3. ENVIRONMENTAL  
 OPERATING TEMPERATURE: -55°C ~ +85°C  
 STORAGE TEMPERATURE: -55°C ~ +105°C  
 4. HOW TO ORDER:

DPF211-XXXXXP-XXXX0

Female	0: RoHS
09: 9Pin 25: 25PIN	D: Dim.A=5.3
15: 15Pin 37: 37PIN	6: Dim.A=7.2
G: Full Gold	4: Dim.A=6.0
	3: Dim.A=5.0
	1: Dim.A=3.2
1: G/F 5: 5u"	Y: 4.7*13.5(Dim.B)*18.4 Copper Pillar
2: 2u" 6: 10u" 8: 30u"	B: 4.7*12.0(Dim.B)*16.9 Copper Pillar
3: 3u" 7: 15u" 9: 1u"	7: 4.7*11.0(Dim.B)*15.9 Copper Pillar
1: Front Ni Back Sn	K: 5.8*12.8 Hexagonal screw(iron)
3: Full Sn	J: 5.8*12.8 Hexagonal screw(copper)
5: Full Ni	6: 4.8*11.8 Hexagonal screw(iron)
	5: 4.8*11.8 Hexagonal screw(copper)
L: Light blue	0: W/O screw
U: Blue(661C)	
B: Black	C: Attach screw type
	B: Ass'y screw type
P: PBT	A: No screw type(Rivet)

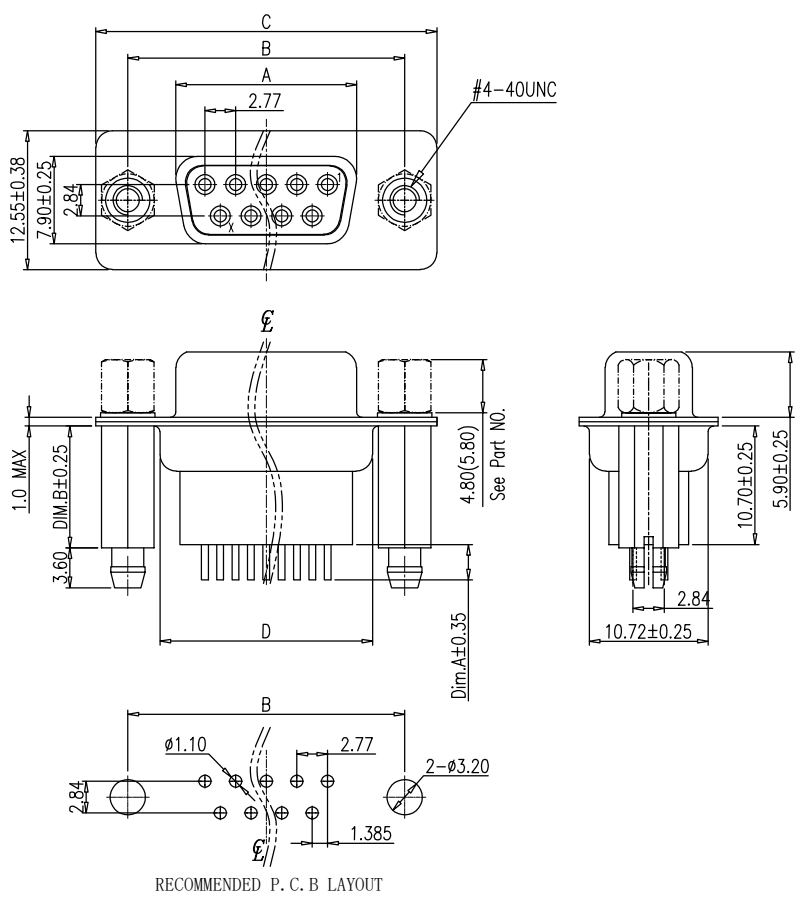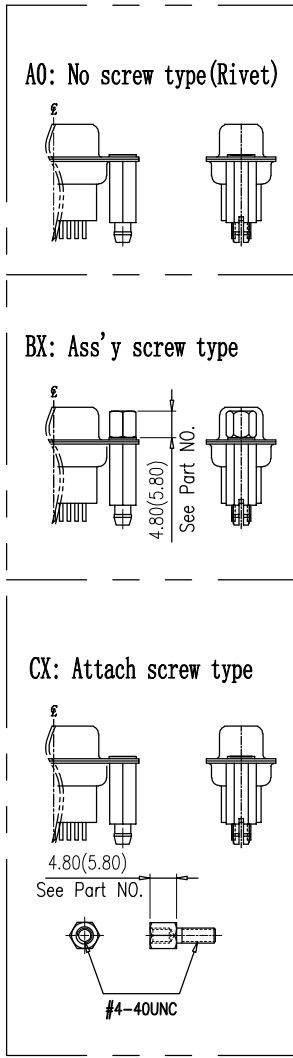

09	16.33	24.99	30.81	19.28
15	24.66	33.32	39.14	27.51
25	38.38	47.04	53.04	41.28
37	54.84	63.50	69.32	57.71
No. of Contact	A ±0.25	B ±0.25	C ±0.38	D ±0.25

<h1>Bestcreate Technology Limited</h1>				TOLERANCES UNLESS OTHERWISE SPECIFIED:		DESIGN: I. L		DATE: 2017. 3. 1		TITLE: DP 9P D-SUB FEMALE CONNECTOR HIGH PLASTIC DIP TYPE	
				.X ± 0.35	X' ± 3'	CHECKED:		DATE:		MATERILA:	
<b>Website: www.bsc-elec.com</b> <b>Email: bestcreate@bsc-elec.com</b>				.XX ± 0.25	.X' ± 2'	C. W		2017. 3. 1		SIZE: A4	
				.XXX ± 0.15	.X' ± 1'	APPROVED:		DATE:		FINSH:	
REV: A	UNIT: mm	SCALE: 1=1	QUALITY SYMBOLS			C. W		2017. 3. 1			